

Bus Drop Cable

60°C 600 Volt UL Listed

Product Construction:

Conductors:

- 14 through 2 AWG, annealed stranded bare copper per ASTM B-8 or B-174 as applicable

Insulation:

- Premium-grade, color-coded Polyvinylchloride (PVC)
- Color Code: Black, White, Red

Jacket:

- Polyvinylchloride (PVC) jacket, Gray
- Temperature range: -20°C to +60°C

Jacket Marking:

- INDENT PRINT: (SIZE) BUS DROP 600V (UL)

Applications:

- As branches from busways per NEC
- Connection of stationary equipment to facilitate relocation of equipment

Features:


- Used in dry location
- One uninsulated ground conductor per interstice
- Resistant to oils, lubricants, water, acids, alkalis, ozone and abrasion

Industry Approvals:

- UL Listed
- RoHS Compliant

Packaging:

- 250' reel (76.2 m) as standard
- 500' (152.4 m) and 1000' (304.8 m) reels also available
- Other put-ups available on special order

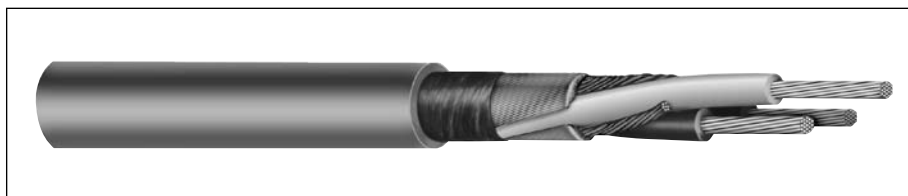

BUS DROP CABLE— 600 VOLT — UL

CATALOG NUMBER	NO. OF COND.	AWG. SIZE	COND. STRAND	NOMINAL INS. THICKNESS		NOMINAL O.D.		CURRENT AMPS [†]	APPROX. NET WEIGHT LBS/M ^(S)	STD. CTN.
				INCHES	mm	INCHES	mm			
03714	3	14	19	0.030	0.76	0.400	10.16	15	120	250'
03712	3	12	19	0.030	0.76	0.440	11.18	20	150	250'
03710	3	10	19	0.030	0.76	0.500	12.70	30	225	250'
03708	3	8	19	0.045	1.14	0.665	16.89	40	370	250'
03706	3	6	19	0.060	1.52	0.815	20.70	55	600	250'
03704	3	4	19	0.060	1.52	0.955	24.26	70	820	250'
03702	3	2	133 ⁽¹⁾	0.060	1.52	1.175	29.85	95	1190	250'

* Exceeds Class C stranding

† Green conductor for grounding only. Ampacities based on NEC table 400.5(A).

^(S) Actual shipping weight may vary.