


# Command® Series Twisted Pair Speaker Cable

CMR (UL) c(UL) or CL3 (UL), AWM Style 2587

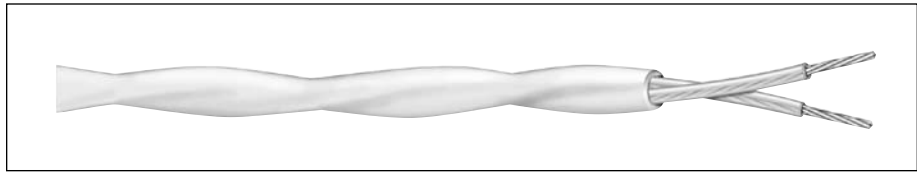

**Product Construction:**

**Conductor:**

- 22-12 AWG fully annealed stranded tinned copper per ASTM B-33

**Insulation:**

- Premium-grade, color-coded PVC
- Premium-grade, color-coded S-R PVC

**Jacket:**

- PVC, white
- Temperature Range: -20°C to +75°C

**Applications:**

- Digital/Audio
- Stereo systems
- In-wall speakers
- Suggested voltage rating: 300 Volts

**Compliances:**

- NEC Article 800 Type CMR (UL, c(UL): 75°C)
- NEC Article 725 Type CL3 (UL, c(UL): 105°C)
- UL, c(UL) AWM Style 2587 (UL, c(UL): 90°C)
- RoHS Compliant Directive 2002/95/EC
- Designed to meet UL 70,000 BTU Vertical Tray Flame Test

**Packaging and Jacket Colors:**

- Please consult Customer Service for packaging and color options

CATALOG NUMBER	NO. OF COND.	AWG SIZE	COND. STRAND	NOM. INSULATION THICKNESS		NOM. JACKET THICKNESS		NOMINAL O.D.		NOM. C-C CAP.* pF/ft
				INCHES	mm	INCHES	mm	INCHES	mm	

**NEC Type CMR**

<b>C1000A</b>	2	22	7/30	0.015	0.38	0.025	0.64	0.170	4.32	20.6
<b>C1001A</b>	2	20	7/28	0.013	0.33	0.025	0.64	0.178	4.52	24.5
<b>C1002A</b>	2	18	7/26	0.022	0.56	0.028	0.71	0.235	5.97	21.3
<b>C1003A</b>	2	16	19/.0117	0.023	0.58	0.032	0.81	0.274	6.96	23.5

**NEC Type CL3, UL Style 2587 (600V)**

<b>C1004A*</b>	2	14	41/30	0.031	0.79	0.032	0.81	0.340	8.64	30.3
<b>C1005A*</b>	2	12	65/30	0.032	0.81	0.035	0.89	0.386	9.80	32.6

\*Capacitance between conductors.

**Color Code Chart  
C1000A-C1001A**

NO. OF COND.	COLORS
1	Black
2	Red

**C1002A-C1005A**

NO. OF COND.	COLORS
1	Black
2	White