


## Proto-Boards®, Solderless Breadboards & Accessories

### PB-83

Special New Proto-Board, Partially assembled in new Blister Package

- Sockets: One special color coded socket
- Bus Strips: 2
- IC Capacity: 6 14 Pin IC'S , Tie Points: 830
- Binding Posts: 3 to be assembled to backplate
- Backplate: Aluminum
- Length: 7 in.
- Width: 4 in.
- Height: 1.4 in.
- Weight: 5 oz.
- Warranty: 1-Year

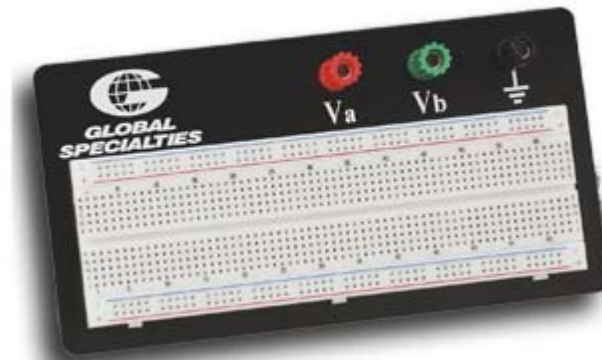

# Proto-Boards® *Global's premium brand*

## SOLDERLESS PROTO-BOARDS®


**NEW!**



**PB-10**      **PB-60**      **PB-70**      **PB-83**      **PB-103**      **PB-104**      **PB-105**

IC Capacity	8	16	12	8	24	32	48
Terminals					450	612	912
Tie Points	840	1680	1260	840	2250	3060	4560
Binding Posts	3	4	3	3	4	4	5
Length	7.0 in	6 in.	8.5 in	7 in.	9 in.	9.8 in.	9.2 in.
Width	4.0 in	6.5 in.	5 in	4.0 in.	6 in.	8 in.	11.4 in.
Height	1.4 in	1.4 in.	1.4 in	1.4 in.	1.4 in	1.4 in	1.4 in
P/N	104-1000	104-6000	104-1070	104-0083	104-1030	104-1040	104-1050
Assembly Required	N/A	N/A	Yes	Yes	N/A	N/A	N/A

Back



Clear Plexiglass plate leaves the pin layout and bus strip pin connections clearly visible!

### JUMPER WIRE KIT



**WK-1**

- Contains pre-cut/pre-stripped/pre-formed AWG#22 insulated solid hookup wire
- 25 pieces each of 14 color-coded lengths - 0.1 through 5.0 inches for a total of 350 wires
- Compartmental plastic case
- Each group of wires are individually wrapped to prevent mix-up

### MATCHBOARD

**EXP-300PC**



- Prepared printed circuit board pre-etched and drilled
- Duplicate hole-and-connection pattern of EXP-300
- Use to provide a permanent hard-wired version of your circuit (components not included)

## The Only Breadboard You'll Ever Need:

- Nickel silver alloy pins are pre-stressed, spring loaded and non-corrosive for long term reliability
- Molded in rugged thermoplastic for durability and high temperature application
- Heavy mylar backing eliminates possibility of short circuits
- Limited lifetime warranty

	MODEL	CENTER	STRIP LENGTH	STRIP WIDTH	TIE POINTS	TERM CLIPS	IC QTY
	UBS-100	0.3 in	6.5 in	2.2 in	840	168	8 (14-pin)
	EXP-300	0.3 in	6.0 in	2.1 in	550	110	6 (14-pin)
	EXP-350	0.3 in	3.6 in	2.1 in	270	54	3 (14-pin)
	MODEL	Mount Dimen.	STRIP LENGTH	STRIP WIDTH	TIE POINTS	TERM CLIPS	IC QTY
	QT-59S	6.2 in	6.5 in	1.32 in	590	118	8
	QT-59B	6.2 in	6.5 in	0.36 in	100	20	n/a
	QT-47S	1.0 in	5.3 in	1.32 in	470	94	6
	QT-47B	5.0	5.3 in	0.36 in	80	16	n/a
	QT-35S	3.8 in	4.1 in	1.32 in	350	70	5
	QT-35B	3.8 in	4.1 in	0.36 in	60	12	n/a

Full specifications available on our website: www.globalsspecialties.com