



(click to enlarge)

Key Features:

- Primary 120VAC, 50/60 Hz., Secondary 240VAC.
- Provides circuit isolation.
- Toroidal transformer for high isolation, low noise, light weight cool operation and low profile.
- World wide applications, 50 or 60 Hz. operation, step up (120VAC to 240 VAC).
- Standard 3-wire, grounded plug (can also be used with [adaptors](#) for proper grounding).
- Input (primary) connected to a 5 foot cord & standard North American plug (NEMA 5-15P).
- Output (secondary) connected to a standard North American duplex - 3 wire grounded receptacle (NEMA 6-15R).
- Features include ventilated black steel case with rocker lighted on-off switch & circuit breaker protected output.
- North American Mark of Safety - C UL & UL listed (File #E211544)
- **Remember** - These units do NOT convert line frequency.


120VAC to 240VAC

Part Number	Capacity VA	# of Outlets	Dimensions (Inches)		
			Length	Width	Height
298CT	250	2	8.25	6	4
298DT	500	2	9	6	4
298ET	750	2	10.25	7.5	5
298FT	1000	2	10.25	7.5	5
298GT	1500	2	12.5	9	5


Side View



Internal View

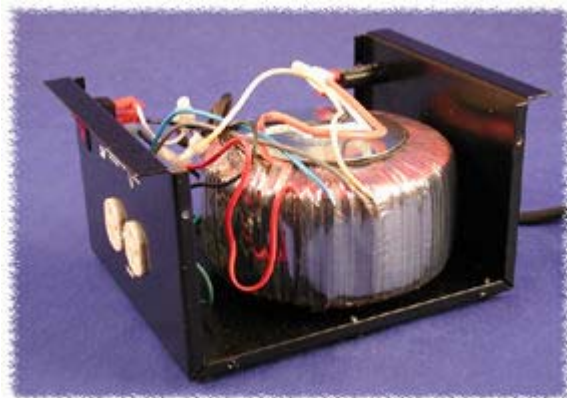

Toroidal Isolation - Step Up - Plug In (298 Series)

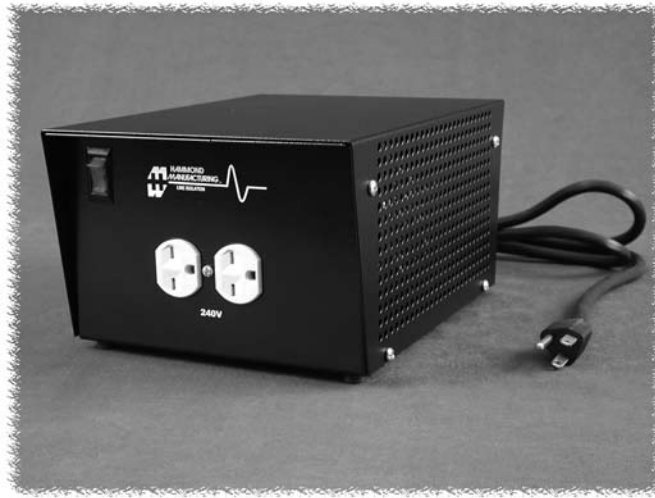

LINE ISOLATION STEP UP - PLUG IN (120V to 240V)

Line

- Primary 120VAC, 50/60 Hz., Secondary 240VAC.
- Provides circuit isolation.
- Toroidal transformer for high isolation, low noise, light weight, cool operation and low profile.
- World wide applications, 50 or 60 Hz. operation, step UP (120VAC to 240 VAC).
- Standard 3-wire, grounded plug (for use with adaptors for proper grounding).
- Input (primary) connected to a 5 foot long cord & standard North American plug (NEMA 5-15P).
- Output (secondary) connected to a standard N. American duplex - 3 wire grounded receptacles (NEMA 6-15R).
- Features include ventilated black steel case, rocker lighted on-off switch & circuit breaker protected output.
- North American Mark of Safety - C UL & UL listed (File #E211544).
- **Remember** - These units do NOT convert line frequency.

Part No.	Capacity VA	# of Outlets	Dimensions (Inches)		
			Length	Width	Height
298CT	250	2	8.25	6.00	4.00
298DT	500	2	9.00	6.00	4.00
298ET	750	2	10.25	7.50	5.00
298FT	1000	2	10.25	7.50	5.00
298GT	1500	2	12.50	9.00	5.00