

WallMount - Smoked Glass Door Ventilated Rack Cabinets (WMC Series)

Path: [Home](#) > [Rack Index](#) > **Smoked Glass Door - Ventilated Rack Cabinets (WMC Series)**



Click to enlarge



[Assembly
Instructions](#)

Features:

- Economic design - 19" wall mount rack cabinet...
- Ventilated slots front & side...
- Pre-punched top for optional fans (plates included for blocking cutouts of one or both fan openings if not required)...
- Cable access panels - both top & bottom...
- Includes two - pair of mounting rails (square hole punched - with starter pack of M6 - 1.00 x 12 mm screws and push in nuts)...
- Includes locking - smoked, tempered glass door...
- Glass door opens a full 180 degrees for easy access to rack mount equipment...
- Glass door is complete with lock & key...
- Supplied unassembled, shipped in a flat pack container (see photo below) for handling ease & protection...
- Overall height - add 3/8" for mounting hardware ...
- Recommended maximum static load weight - 130 pounds...
- Rugged black powder paint finish...

23.6" (600 mm) Deep Models:



Part Number	Reader File		AutoCAD .dxf file (zipped)		Panel Height		Overall Height		Overall Width	
					Inches	Units	Inches	mm	Inches	mm
WMC1901023BK2	NEW		NEW		10.50	6U	14.6	370	23.6	600
WMC1901523BK2	NEW		NEW		15.75	9U	19.8	502	23.6	600
WMC1902123BK2	NEW		NEW		21.00	12U	25.0	638	23.6	600
WMC1902623BK2	NEW		NEW		26.25	15U	30.3	770	23.6	600

Note: We are working on drawings - available shortly.


WMC - SERIES

Features


- Offered in 4 heights all with overall width 600mm (23.6") and overall depth of 600mm (23.6")
- Flat pack makes storage and shipping cost effective
- Quick and easy bolt-together field assembly
- Provides standard 19" rack mounting
- High quality, powder coat finish (black)
- Comes complete with:
 - Sturdy cold-rolled steel frame
 - Static load capacity of 60 kg (130lbs)
 - Ventilation slots front and side
 - Optional fans can be added into top cutouts
 - Cable access panels top and bottom
 - 2 pair of mounting rails
 - Square hole design, 20 screws and push-in nuts
 - 25mm incremental depth adjustment
 - Tempered glass door provides full view of equipment
 - Full 180 degree opening
 - Easily removed and can be hinged in either direction
 - Complete with lock and key

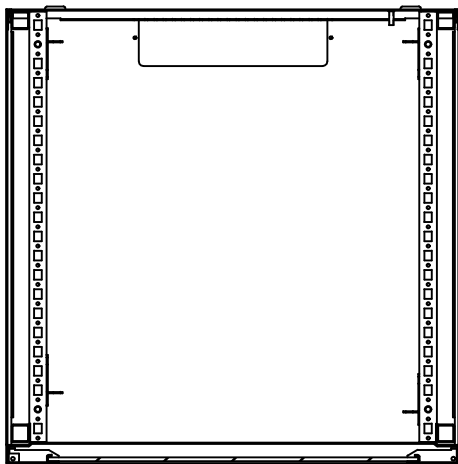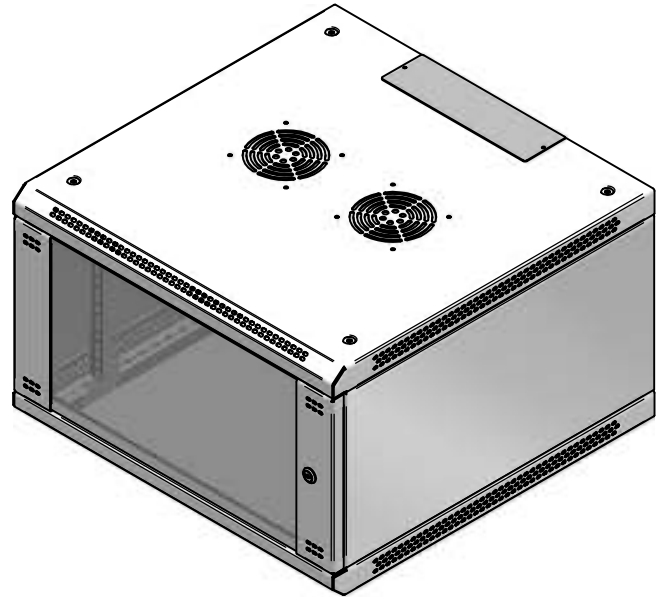

SECTION A-A

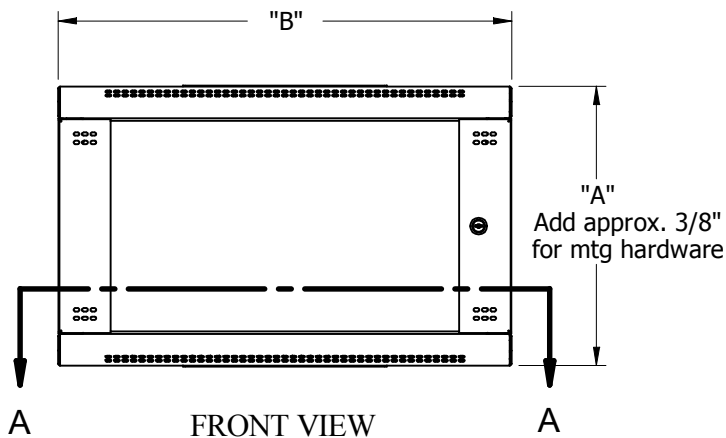

FRONT VIEW

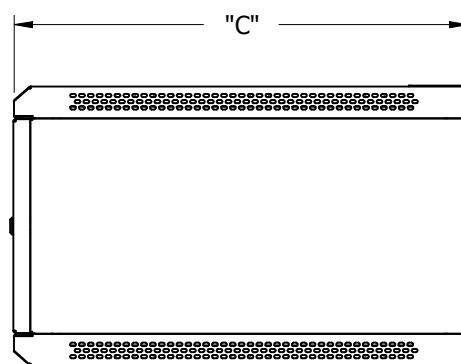

SIDE VIEW

Part Number	Height (A)	Overall Width (B)	Overall Depth (C)
WMC1901023BK2	370mm (14.5")6U	600mm (23.6")	600mm (23.6")
WMC1901523BK2	502mm (19.8")9U	600mm (23.6")	600mm (23.6")
WMC1902123BK2	636mm (25.0")12U	600mm (23.6")	600mm (23.6")
WMC1902623BK2	770mm (30.3")15U	600mm (23.6")	600mm (23.6")