




- Flat Cable Connectors SEK
- *har-mik®*
- D-Sub
- InduCom

Applications**Product details****09 03 124 6901****Printed board connector**


Type	Type M
Standard/Inverse	Standard
Contact gender	Male contacts
Size	Whole size
Number of contacts	24 + 8 high current or coaxial contacts
Contact arrangement	Rows a, b and c
Termination	Angled solder pins
Termination length	3.0 mm
First mating contact	without first mating contacts
Performance Class	Performance level 2 as per IEC 60603-2
Row pitch	2.54 mm
Board fixing	Without fixing
Current	2 A max.
Clearance/ Creepage	1.2 / 1.2 mm min.
RoHS compliant	Yes

Inquiry**Available Downloads**

Alle Rechte vorbehalten/ All rights reserved

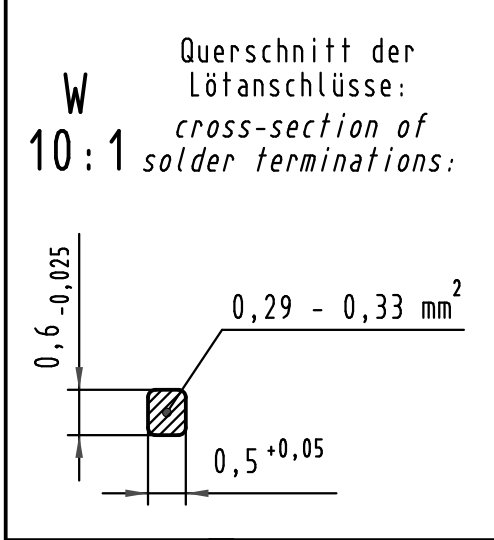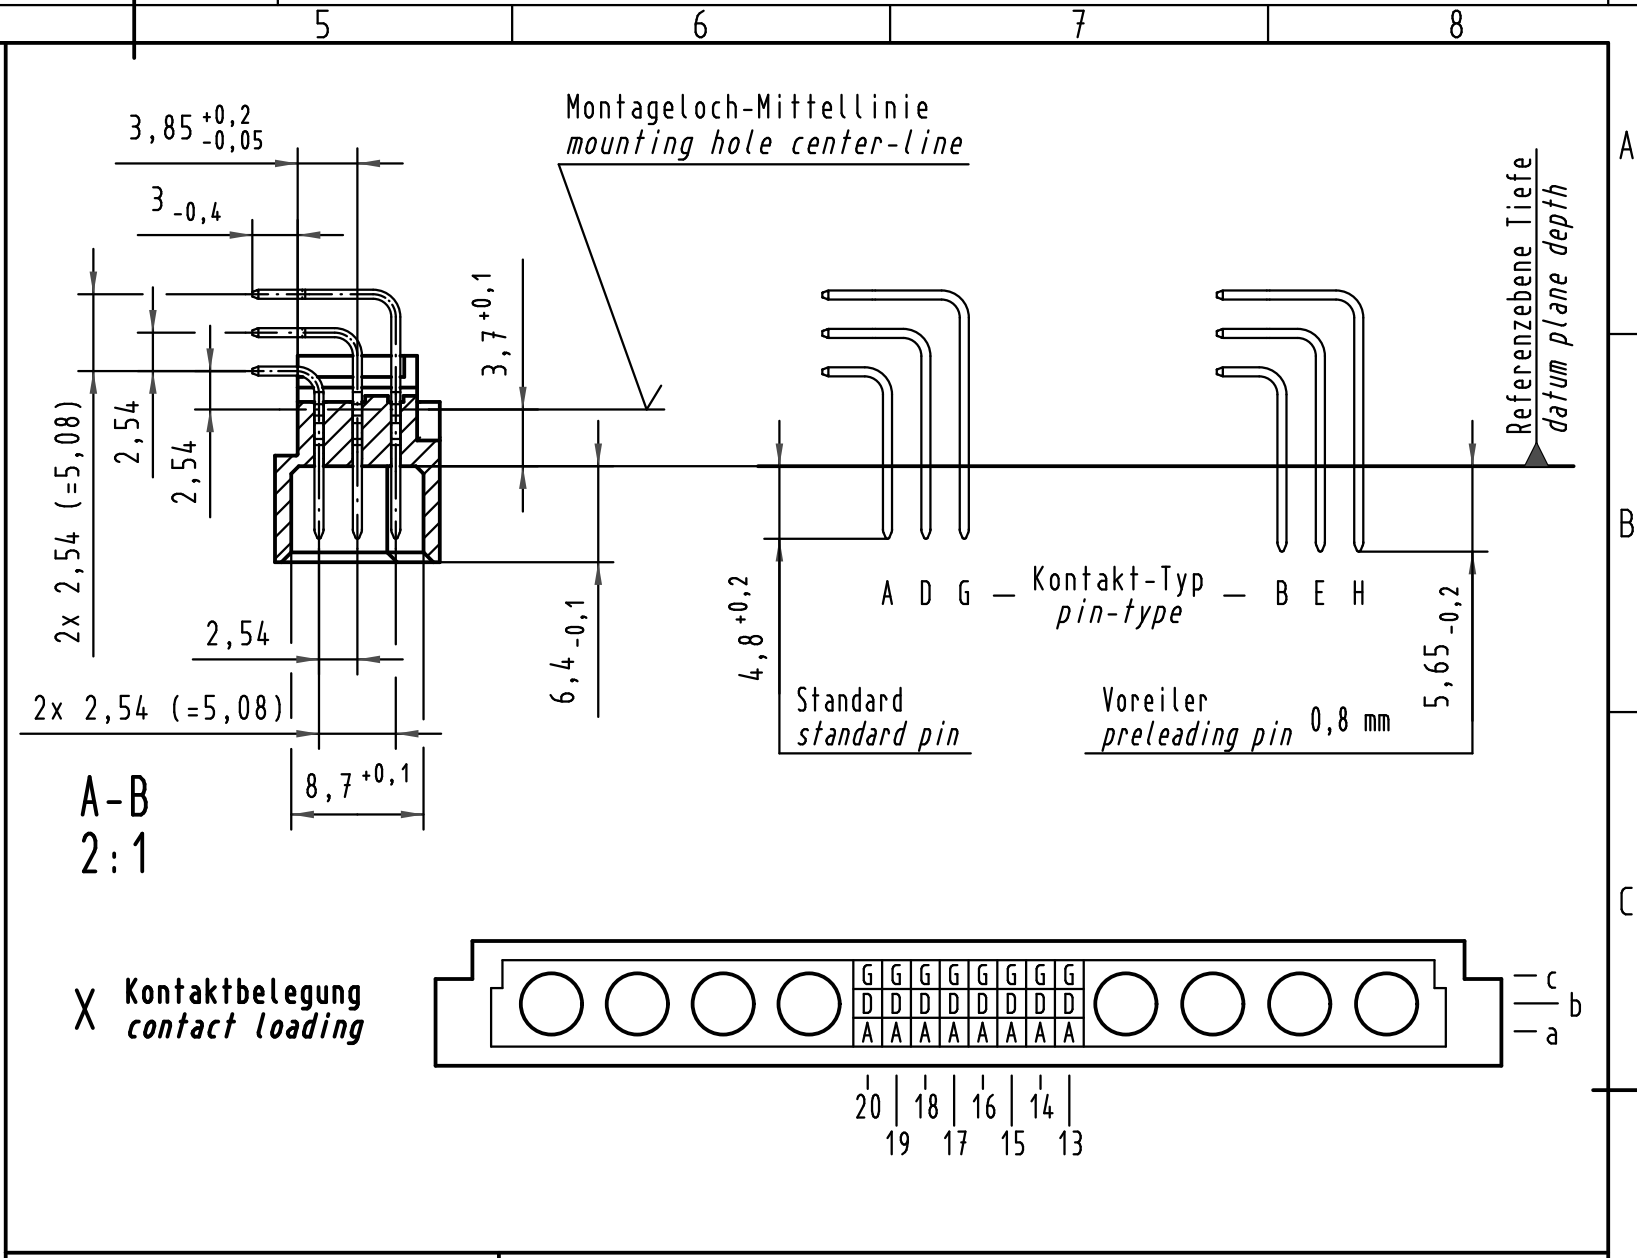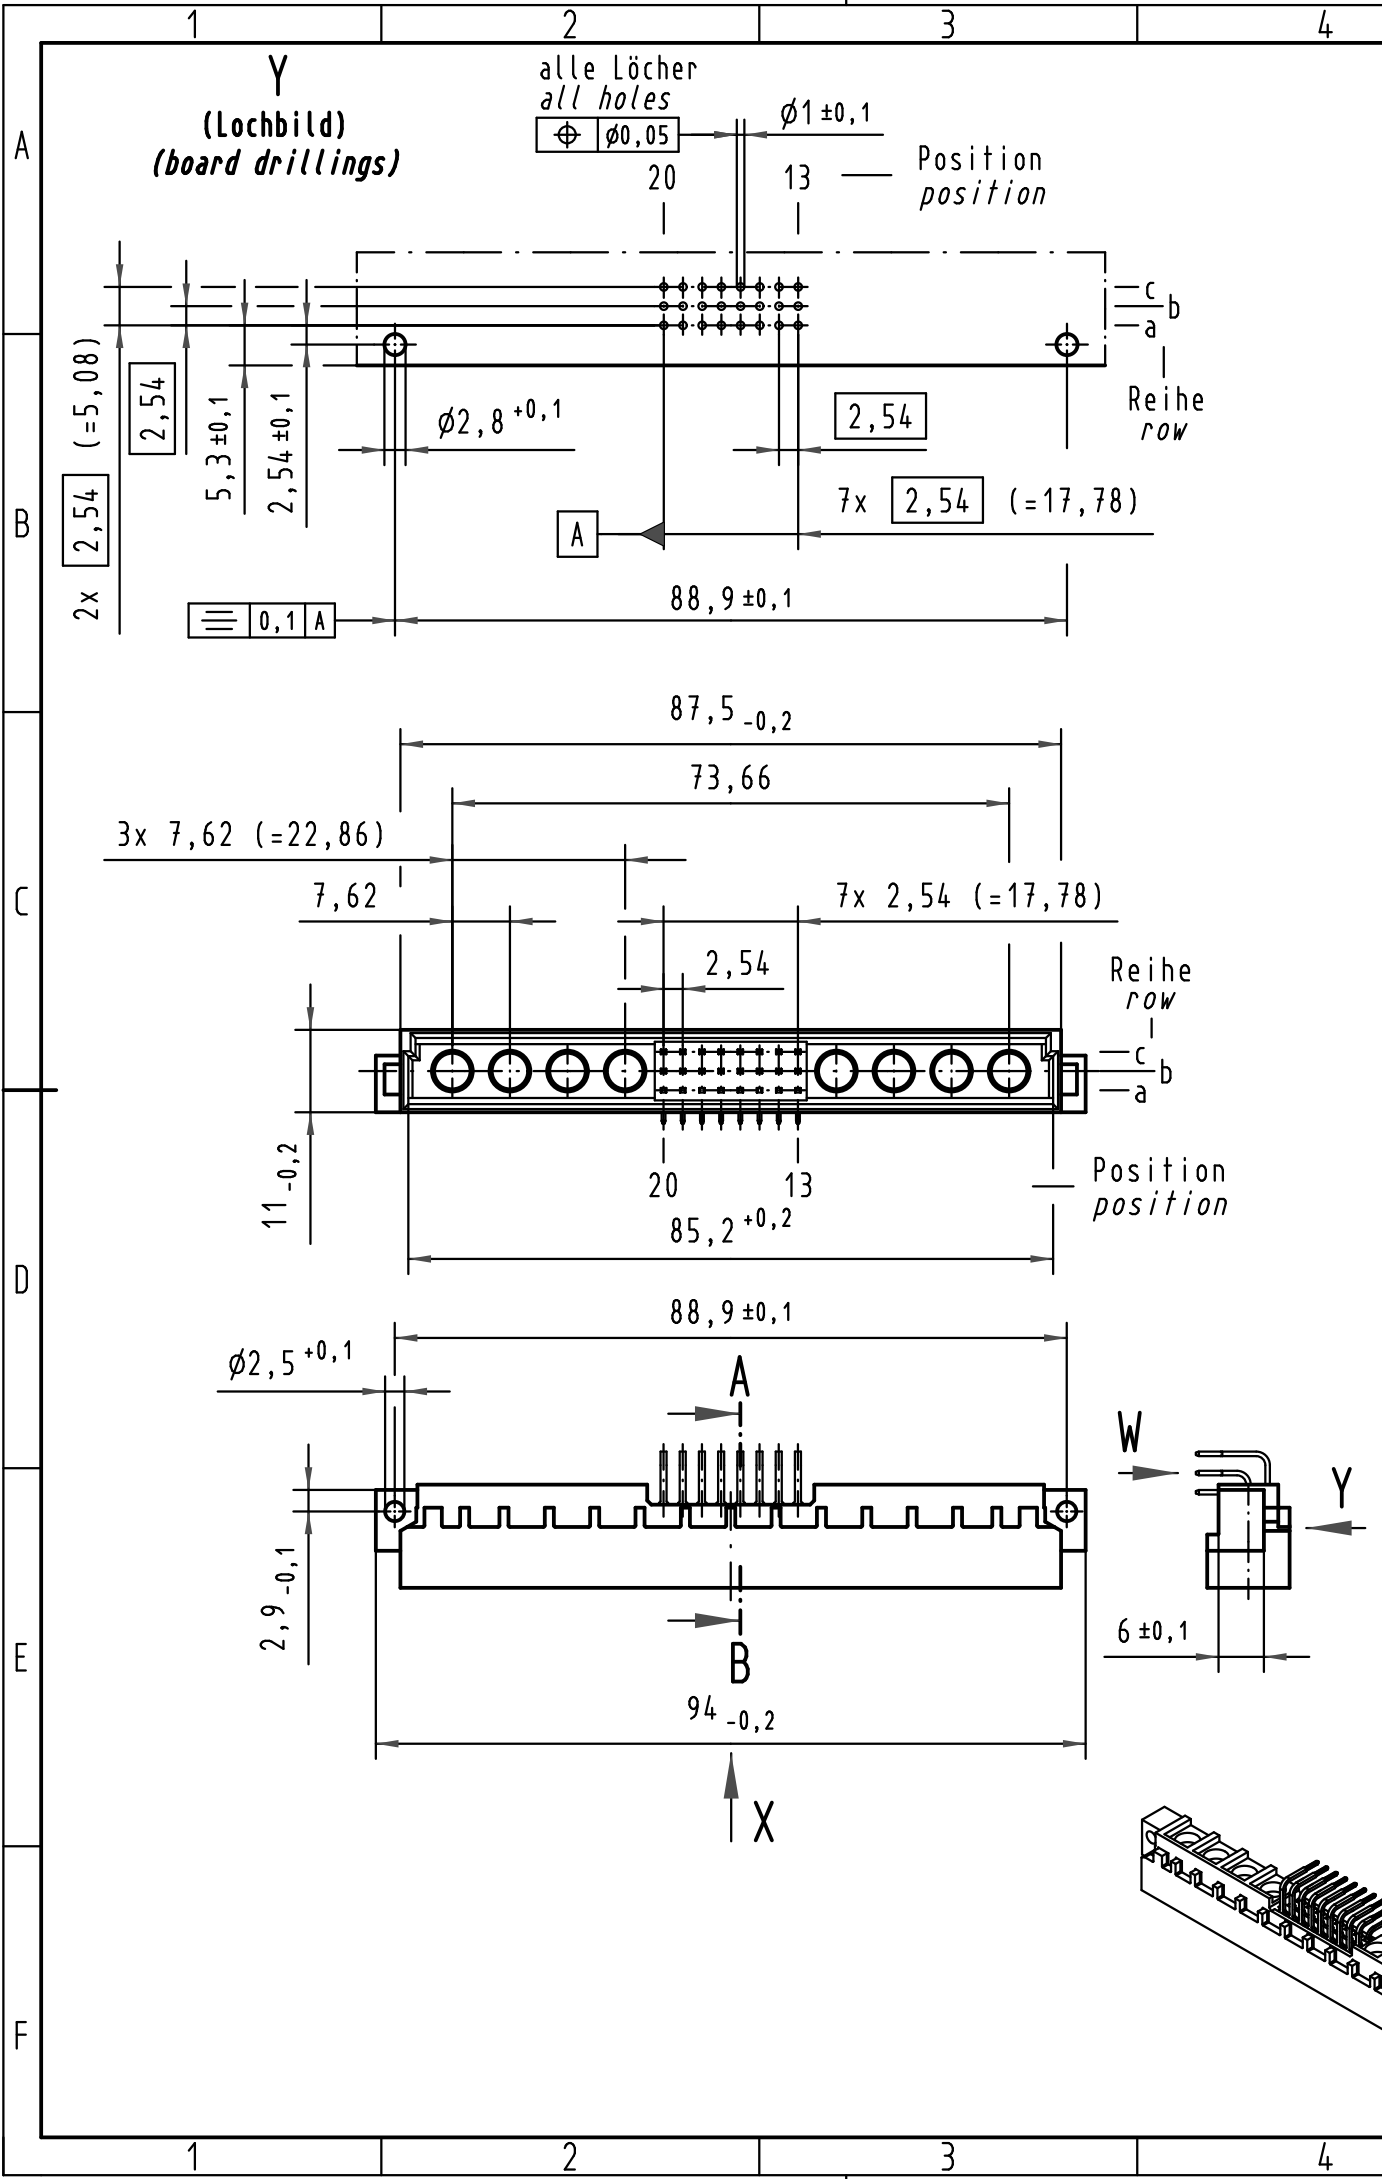

09 03 124 7901	3	Au über/over Ni
09 03 124 6901	2	Au über/over Ni
09 03 124 2901	1	Au über/over Ni
Bestell-Nr. part-no.	Anforderungsstufe nach IEC performance level acc. to IEC	Kontaktoberfläche contact plating

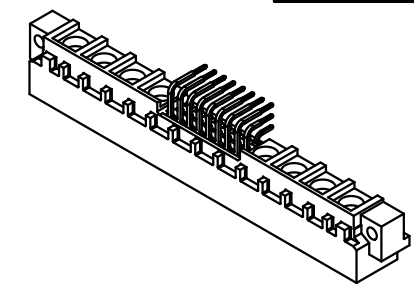

All Dimensions in mm Original Size DIN A 3		Techn. Character.		Nicht tolerierte Maß/Free size tolerances IEC 60603-2	
		Dat.	Name	Bauform M24 Messerleiste Einlöt, 24 pol. type M24 male connector solder, 24 pol.	
		Detail.	26.07.01 Rie.	Maßstab/Scale 1:1 2:1 10:1	
		Insp.	26.07.01 Pa.		
		Stand.			
34650	05.10.07 Hage.	HARTING Electronics GmbH & Co. KG D-32339 ESPELKAMP		TB 09 03 124 x901	
30054				Blatt/ page	
Mod.	Dat.	Name		Sub.	