

- Back ○ PushPull Power
- Flat Cable Connectors SEK
- *har-mik®*
- D-Sub
- InduCom

---

- Applications

---

## Product details


---

**09 03 196 2921**


### Printed board connector

Type	Type C
Standard/Inverse	Standard
Contact gender	Male contacts
Size	Whole size
Number of contacts	96 poles
Contact arrangement	Rows a, b and c
Termination	Angled solder pins
Termination length	3.0 mm
First mating contact	without first mating contacts
Performance Class	Performance level 1 as per IEC 60603-2
Contacts	with contacts
Row pitch	2.54 mm
Board fixing	Without fixing
Coding facility	without coding facility
Current	2 A max.
Clearance/ Creepage	1.2 / 1.2 mm min.
RoHS compliant	Yes

Alle Rechte vorbehalten/ All rights reserved

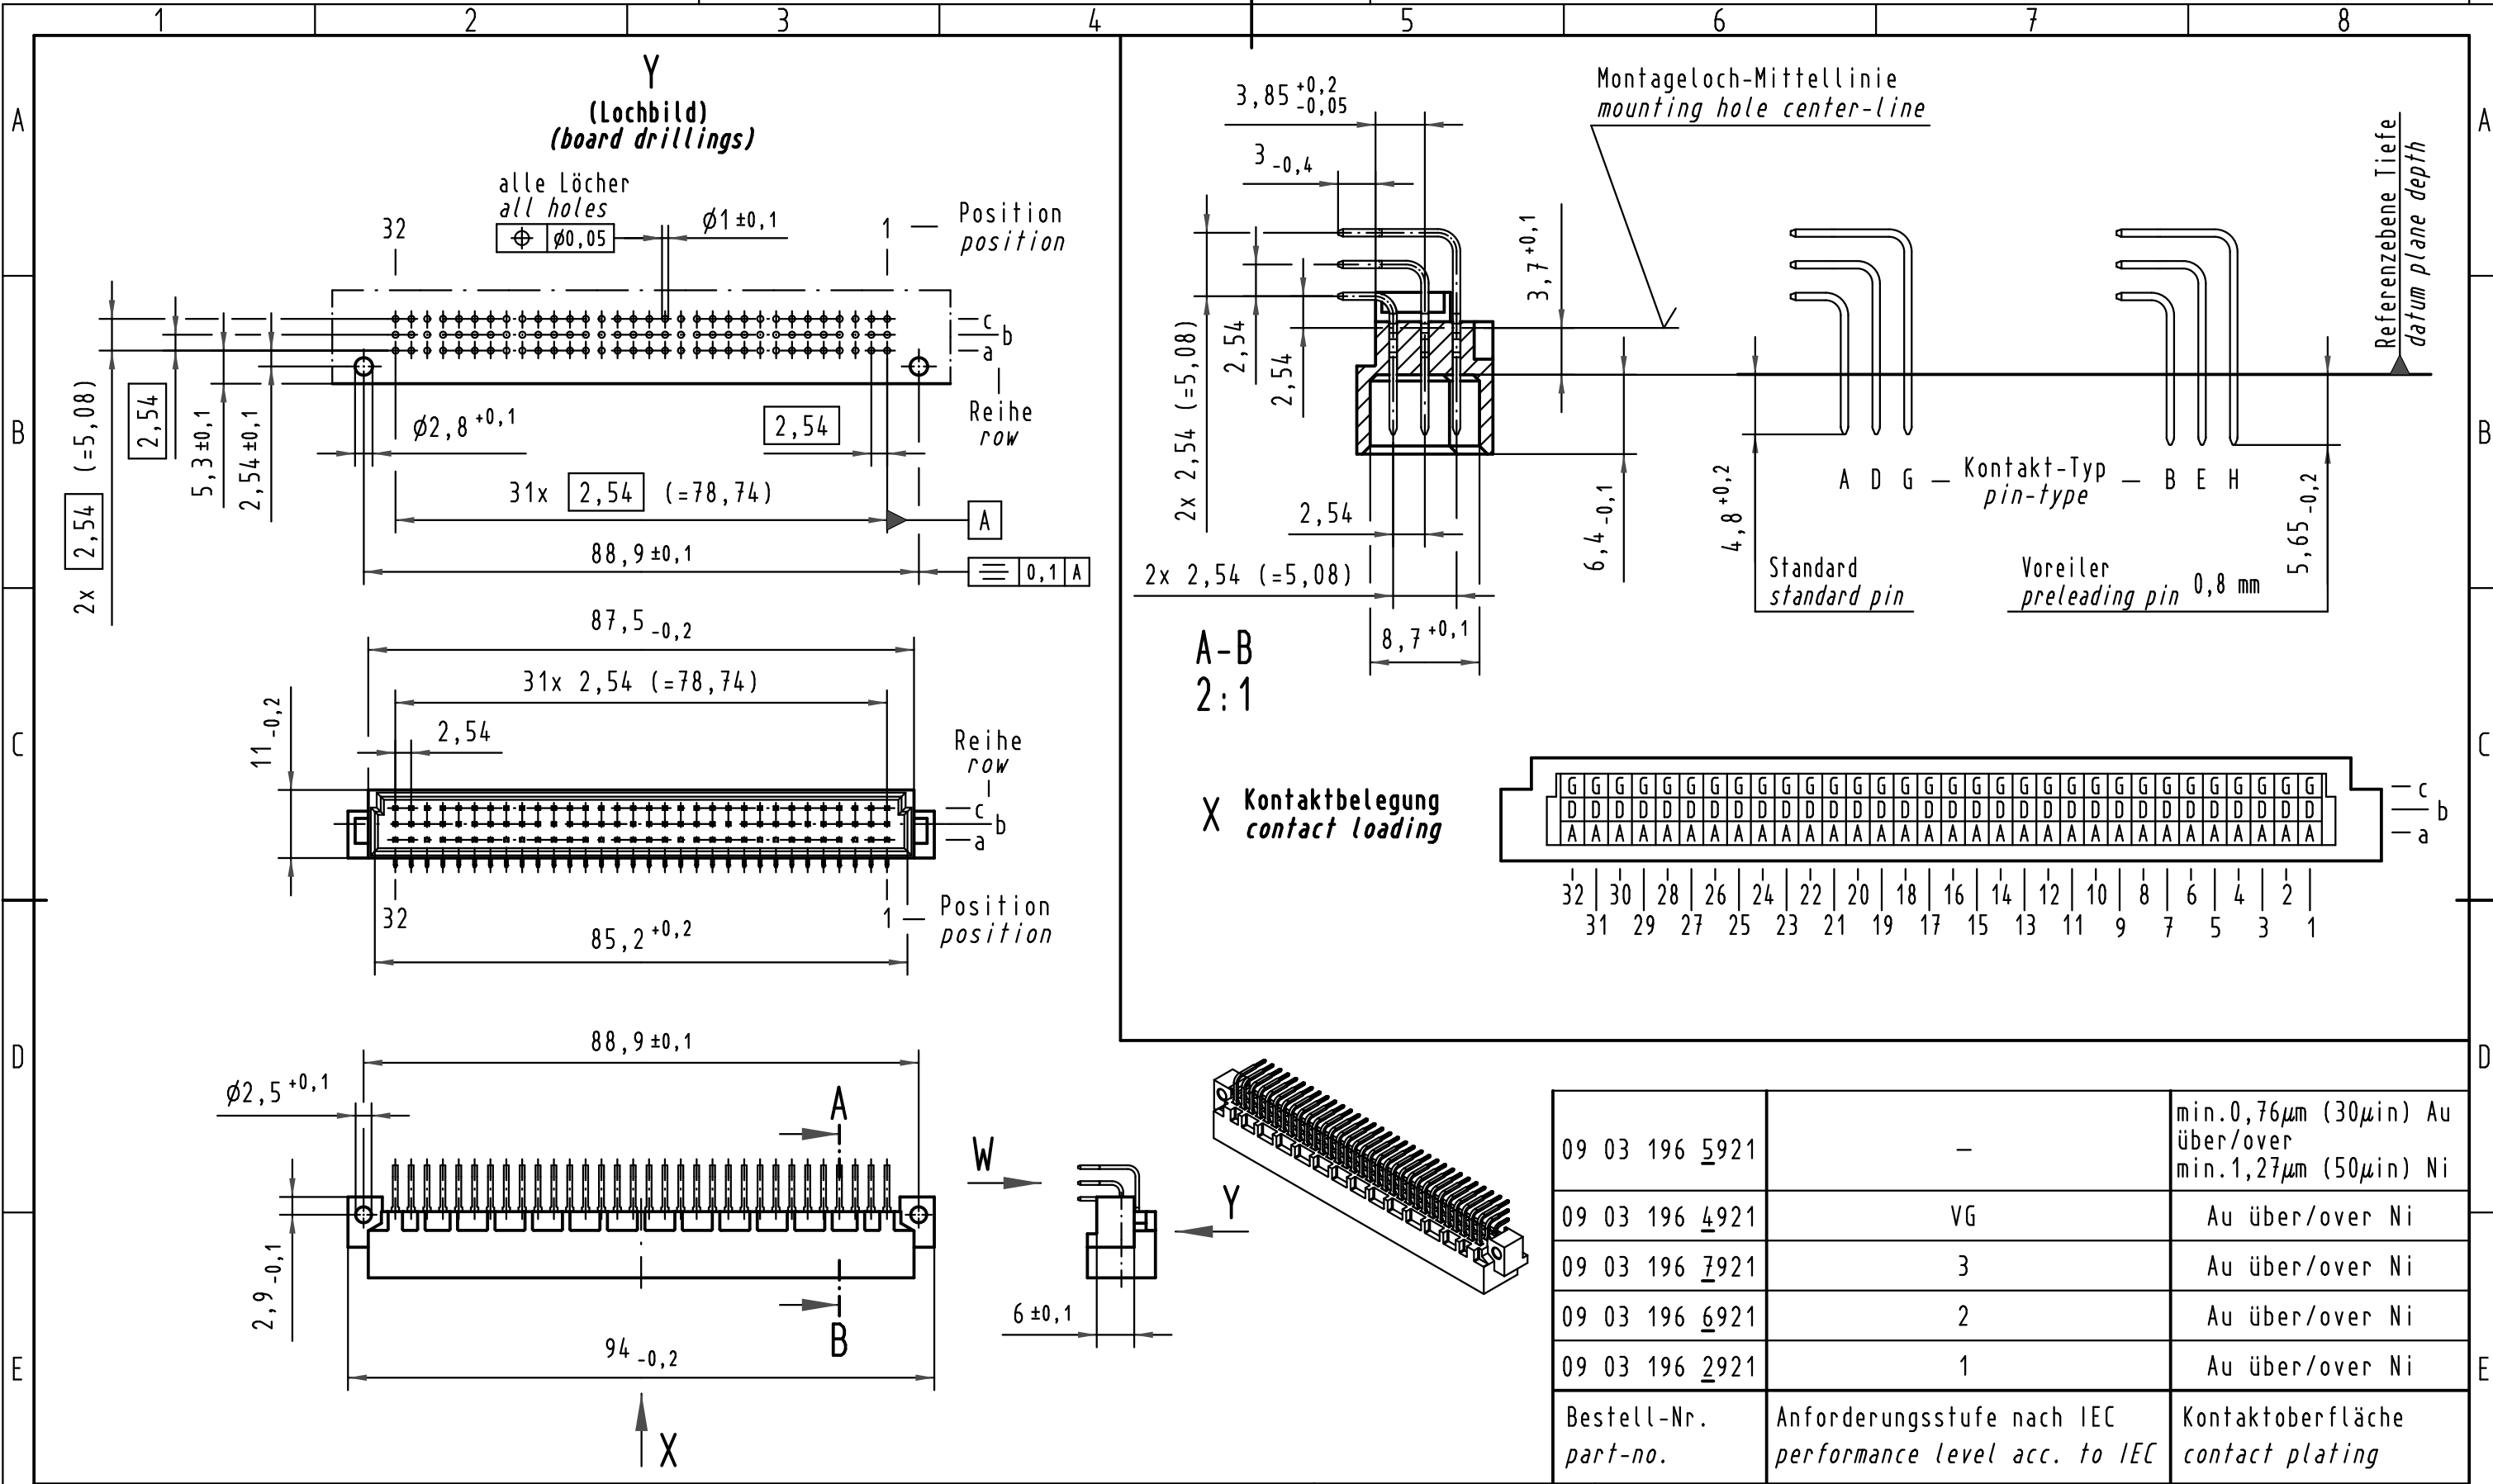

09 03 196 5921	-	min. 0,76 $\mu$ m (30 $\mu$ m) Au über/over min. 1,27 $\mu$ m (50 $\mu$ m) Ni
09 03 196 4921	VG	Au über/over Ni
09 03 196 7921	3	Au über/over Ni
09 03 196 6921	2	Au über/over Ni
09 03 196 2921	1	Au über/over Ni
Bestell-Nr. part-no.	Anforderungsstufe nach IEC performance level acc. to IEC	Kontaktoberfläche contact plating

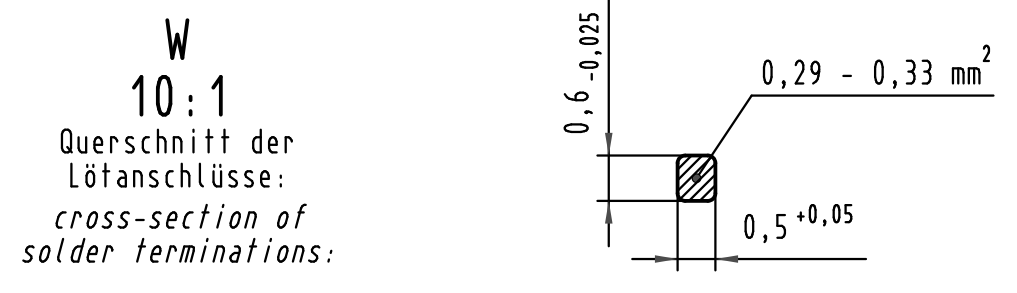

All Dimensions in mm Original Size DIN A 3		Techn. Character.		Nicht tolerierte Maße/Free size tolerances IEC 60603-2		
		Dat.	Name	Maßstab/Scale	Bauform C Messerleiste Einlöt, 96 pol. type C male connector solder, 96 pol.	
		Detail.	05.05.00 Rie.			1:1
		Insp.	05.05.00 Be.			2:1
		Stand.		10:1		
34650	18.10.07	Hage.	HARTING Electronics GmbH & Co. KG D-32339 ESPELKAMP		<b>TB 09 03 196 x921</b> Blatt/page	
27479						
Mod.	Dat.	Name	Sub.			