



5

4

3


2

1

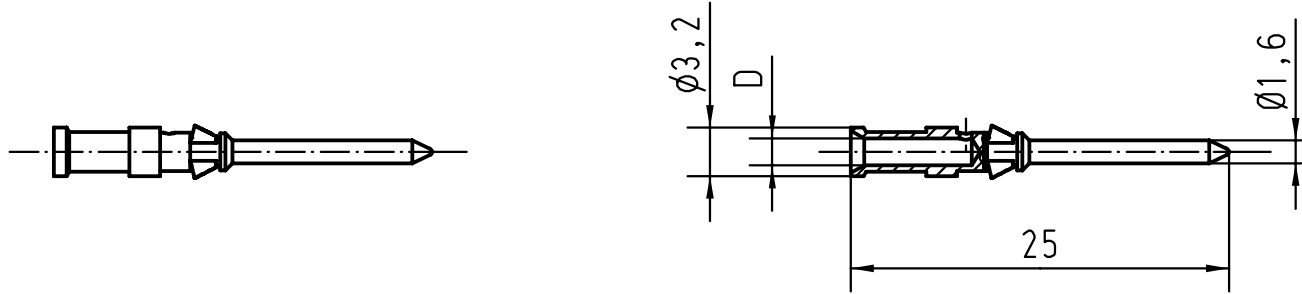

Bestell-Nummer / versilbert silver plated	Part No. vergoldet gold plated	D	Leiterquerschnitt/ wire gauge mm <sup>2</sup>	AWG	Abisolierlänge der Litze stripping length
09 15 000 6104	09 15 000 6124	0,90	0,14-0,37	26-22	8
09 15 000 6103	09 15 000 6123	1,10	0,5	20	
09 15 000 6105	09 15 000 6125	1,30	0,75	18	
09 15 000 6102	09 15 000 6122	1,45	1	18	
09 15 000 6101	09 15 000 6121	1,75	1,5	16	
09 15 000 6106	09 15 000 6126	2,25	2,5	14	6
09 15 000 6107		0,90	0,14-0,37	26-22	8

1) Nur für Buchanan Crimpwerkzeug Einstell Ø 1.0/  
only for Buchanan crimping tool adjusting Ø 1.0



All Dimensions in mm  
Original Size DIN A 4

Techn. Character.

Nicht tolerierte Masse/ Free size tolerances

	Dat.	Name	Massstab/Scale
Detail.	22.03.99	Kö	2:1
Insp.		SDT.	
Stand.			

Han D / R 15 Stiftkontakt  
Crimpkontakt gedreht 10 A  
crimp contact twisted 10 A

25592

HARTING KGaA  
D-32339 ESPELKAMP



TB 09 15 000 61..

Blatt/ page

Bestell Nr/Part No

Mod. Dat. Name

Sub. TB 09 15 000 6... v. 22.02.93