

- Back**
- o Flat Cable Connectors SEK
 - o *har-mik®*
 - o D-Sub
 - o InduCom

- **Applications**

Product details

09 56 300 5601 **High density cable connector**

| | |
|-----------------------|-----------------------------------|
| Gender | Male High Density |
| Termination | Crimp |
| Number of contacts | 44 |
| Flange | through hole 3.1 mm |
| Shell | tinned metal shell with dimples |
| Insulation material | PBTP |
| Contact configuration | contacts must be order separately |
| RoHS compliant | Yes |

Inquiry

Available Downloads

| Title | Format | |
|--------------|---------------|--------------------------|
| Data sheet | PDF | download |
| CAD data 2D | DXF | download |

Product news

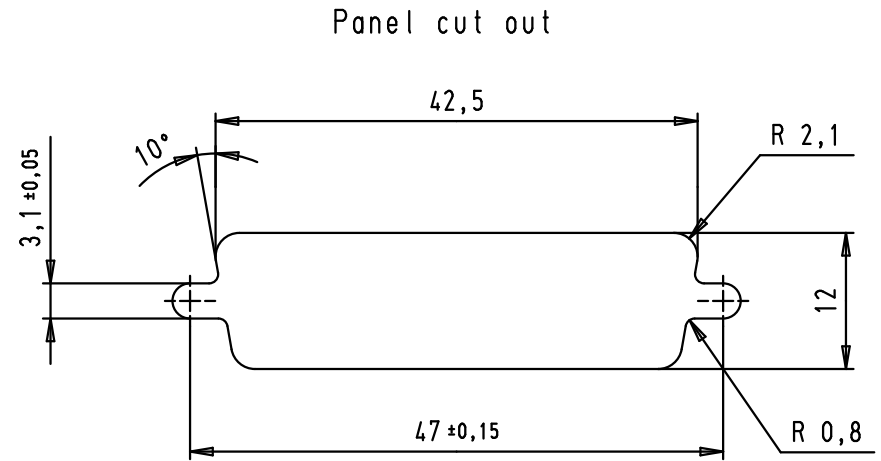
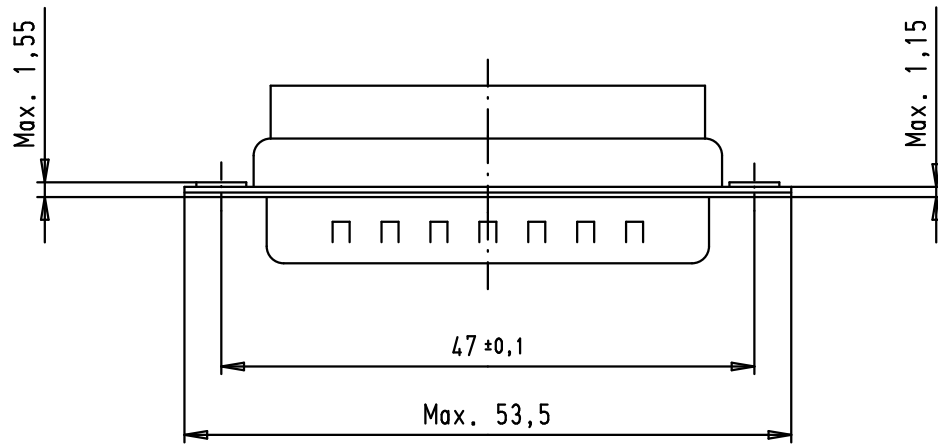
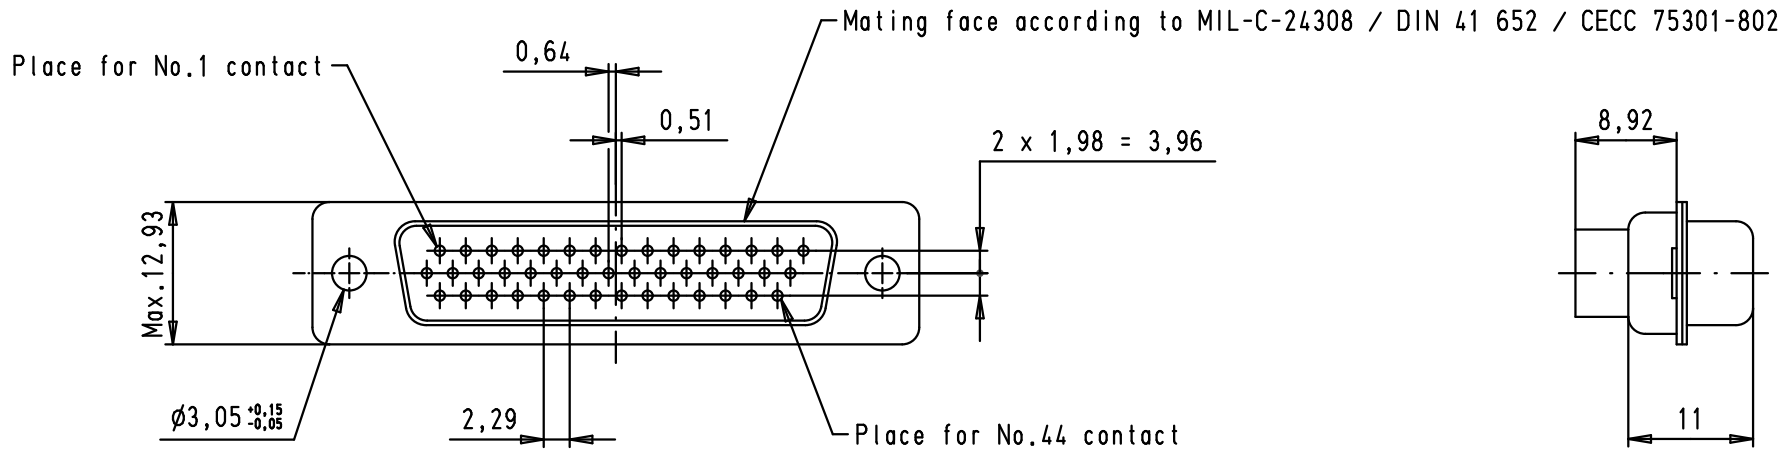
5



4

3

2

1



| | | | | | | | | |
|-------|----------|------|-------------------------------|----------|------|---|---|-------------------|
| | | | | Det. | Name |  All Dim. in mm Orig. Size DIN A 4 | D-Sub, high density, male, 44 poles, for crimp contacts | Maßstab/ Scale |
| | | | Detail. | 16/09/02 | CV | | | 1,5:1 |
| | | | Insp. | | | | | |
| | | | Stand. | | | | | |
| 34618 | 17/10/07 | PK | HARTING EURL F-95972 Paris | | |  | TB 09 56 300 5601 | Blatt/ Page |
| 31064 | 16/09/02 | CV | | | | | | 1 / 1 |
| Mod. | Dot. | Name | | | | | | Sub. |

D

C

B

A