

- Back**
- o Flat Cable Connectors SEK
  - o *har-mik®*
  - o D-Sub
  - o InduCom

---

● **Applications**

---

## Product details

---

**09 67 025 5601**  
**D-Sub - S cable connector**

Gender	Male connector
Termination	Crimp
Number of contacts	25
Flange	through hole 3.1 mm
Shell	tinned metal shell with dimples
Material	PBTP
Contact configuration	contacts must be order separately
RoHS compliant	Yes

**Inquiry**

### Available Downloads

Title	Format	
Data sheet	PDF	<a href="#">download</a>
CAD data 2D	DXF	<a href="#">download</a>

### Product news

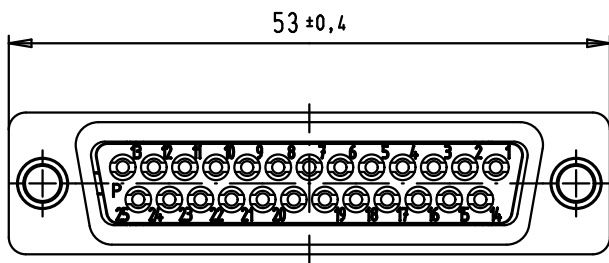
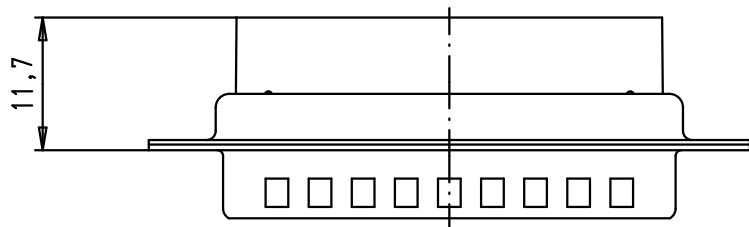
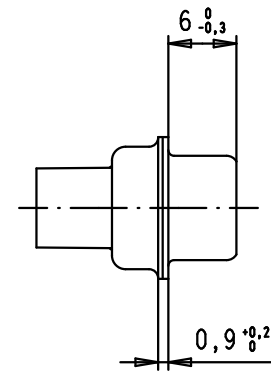
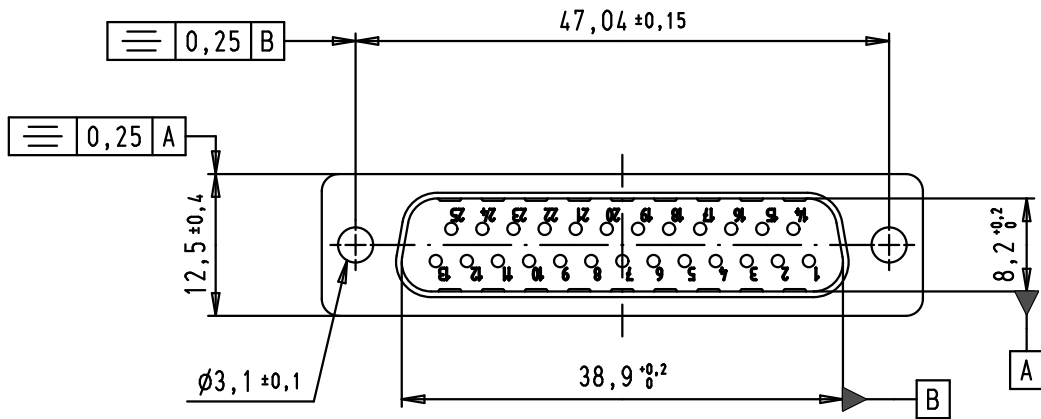
5

4

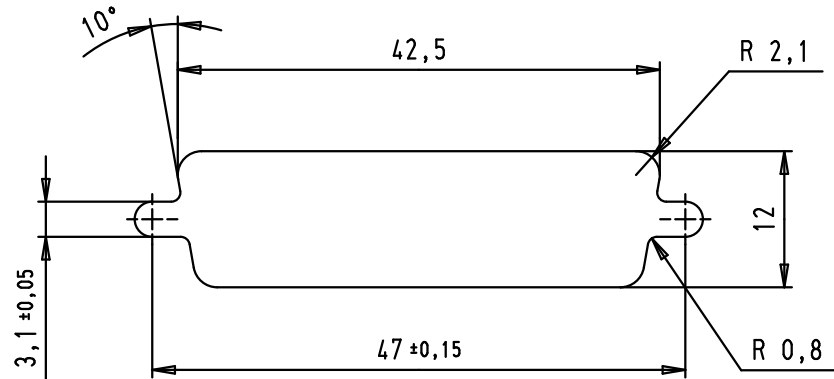
3



2

1



Panel cut out



Mod.	Dat.	Name	Dot.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, male, straight, 25 poles, for crimp contacts AWG 20-24, tin plated shell with dimples	Maßstab/ Scale	
34784	14/02/08	PK	Detail.	09/04/02			CV	1,5:1
33106	22/09/05	JMDR	Insp.					
31571	12/11/03	SH	Stand.					
31526	31/07/03	TCP	HARTING EURL F-95972 Paris				TB 09 67 025 5601	Blatt/ Page
29768	09/04/02	CV						1 / 2
								Sub.

D

C

B

A