

DCT110HIRC2

Dual Clamp Tie 150 lb, Stud Dia .25" Length 19.2" Max Bun Dia 2.3" Wid .5"

PA66HIRHS, Blk 100/pkg

Article Number: 115-00033

Part Number: DCT110HIRC2

Type: DCT11

Material: PA66HIR



1. Base Data

Part No.	DCT110HIRC2
-----------------	-------------

Type	DCT11
-------------	-------


Color	Black (BK)
--------------	------------

Features	HellermannTyton's dual clamp ties are designed to provide parallel separation between hoses, wires, cables and tubing, protecting them from abrasion. These ties have an optional mounting hole for securing bundles along the chassis of trucks, trailers, and
-----------------	---

Application

Primarily designed for use in the automotive industry, these parts can be used in a wide variety of applications where 5mm/8mm weld studs or 5mm/8mm ISO bolts are used and cables need to be bundled and secured. (WS series, T120RSM, DCT9 & DCT 11 are for 1/

2. Product Dimensions

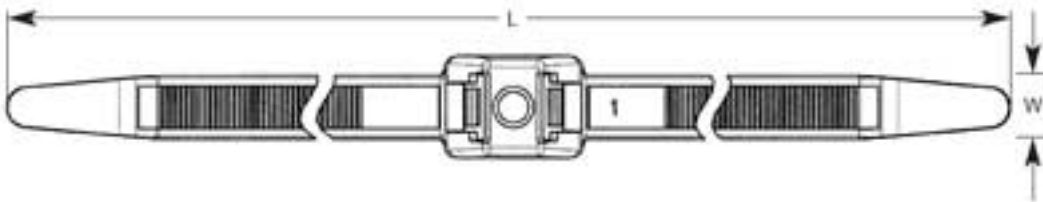

Min. Tensile Strength	150 lbs / 670 N
Length (L)	19.2 " / 489 mm
Width (W)	.5 " / 12.7 mm
Width (W2)	19.7 mm
Height (H)	19.1 mm
Min. Ø Bundle	6.0 mm
Max. Ø Bundle	2.3 " / 58.0 mm
Mounting Hole Ø	6.2 mm
Stud Ø	.25 " / 6.35 mm

4. Material and Specifications

Material	Polyamide 6.6 high impact modified (PA66HIR)
Material Shortcut	PA66HIR

Flammability UL94 HB

Operating Temperature -40 °F to +230 °F (-40 °C to +110 °C) continuous

Logistic and Packaging

Packaging Type bag

Pkg. Qty. 100

Carton Qty. 500

UPC 08930627870

Bundle Separation Products

Dual Clamp Ties


HellermannTyton's dual clamp ties are designed to provide parallel separation between hoses, wires, cables and tubing, protecting them from abrasion. These ties have an optional mounting hole for securing bundles along the chassis of trucks, trailers, and heavy duty equipment. The unique, one-piece design features the dual head centered on the strap.

Available in two lengths, the dual clamp ties accommodate bundles ranging from .25 inches to 2.3 inches. The flexible wide straps minimize pinching of hoses and convoluted tubing. The straps are also releasable.



U.S. Patent Number 5,966,781

Material Data	
Material	Polyamide 6.6 impact modified, Heat Stabilized, UV Resistant (PA66HIRHS)
Operating Temperature	-40 °F to +230 °F (-40 °C to +110 °C) continuous
Flammability	UL94 HB

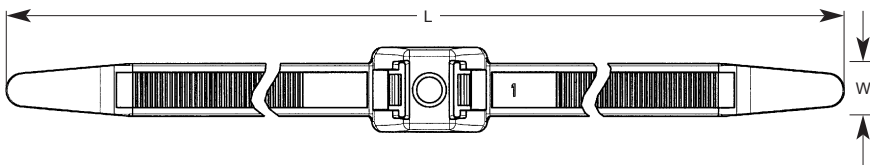

Product Selection			Stud Ø	Min. Tensile Strength	Length (L)	Max. Ø Bundle (each side)	Width (W)	Color	Pkg. Qty.
Article No.	Part No.	Type							
115-30900	DCT90HIRK2	DCT9	.25" (6.35)	150 lbs (670)	13.0" (331)	1.3" (33.02)	.50" (12.7)	Black	50
115-00034	DCT90HIRC2	DCT9	.25" (6.35)	150 lbs (670)	13.0" (331)	1.3" (33.02)	.50" (12.7)	Black	100
115-31100	DCT110HIRK2	DCT11	.25" (6.35)	150 lbs (670)	19.2" (489)	2.3" (58.42)	.50" (12.7)	Black	50
115-00033	DCT110HIRC2	DCT11	.25" (6.35)	150 lbs (670)	19.2" (489)	2.3" (58.42)	.50" (12.7)	Black	100

Installation tools - MK9, MK9HT, MK9P. Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.