

RT50S9C2


Releasable Cable Tie, 50lb. 6.5" Max. Bun. Dia 1.38" PA66, Natural, 100/pk

Article Number: 115-06319

Part Number: RT50S9C2

Type: RT50S


Material: PA66

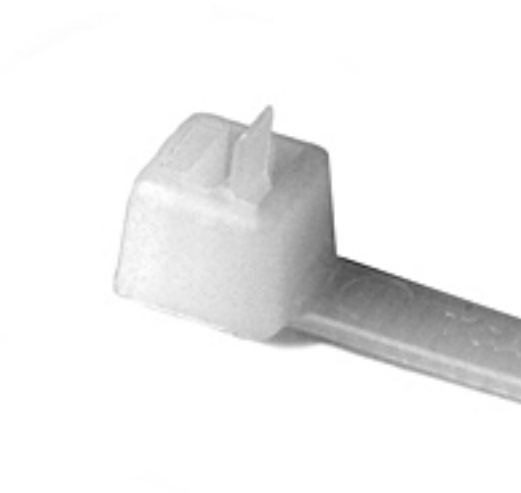

1. Base Data


Part No.	RT50S9C2
Type	RT50S
Color	Natural
Features	The extended pawl allows for simple and quick release of the ties.
Application	Perfect for prototype construction and service requiring the addition of wire on existing harnesses.

2. Product Dimensions

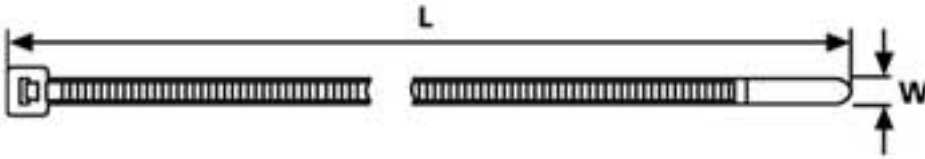

Min. Tensile Strength	50 lbs / 225 N
Length (L)	6.5 " / 165 mm
Width (W)	.18 " / 4.6 mm
Height (H)	.055 " / 1.4 mm
Min. Ø Bundle	.06 " / 1.5 mm
Max. Ø Bundle	1.38 " / 35.0 mm

4. Material and Specifications

Material	Polyamide 6.6 (PA66)
Material Shortcut	PA66
Flammability	UL94 V2
Operating Temperature	-40 °F to +185 °F (-40 °C to +85 °C) continuous
ROHS Conformity	

Logistic and Packaging

Packaging Type	bag
Pkg. Qty.	100

Carton Qty.

1 Pieces

EAN code

4031026108414

UPC

08930604560


Miscellaneous

UL Recognized (US and Canada) Yes

Releasable Ties

The extended pawl allows for simple and quick release of the ties. Perfect for prototype construction and service requiring the addition of wires on existing harnesses.

Material Data	
Material	Polyamide 6.6 (PA66)
Operating Temperature	-40 °F to +185 °F (-40 °C to +85 °C) continuous
Flammability	UL94 V2



RT40R



RT50S and RT50LL

CALUS
File# E64139

Product Selection			Min. Tensile Strength	Length (L)	Max. Ø Bundle	Width (W)	Color	Pkg. Qty.
Article No.	Part No.	Type						
RT40R								
115-06219	RT40R9C2	RT40R	34 lbs (150)	8.46" (215)	2.0" (51)	.16" (4.0)	Natural	100
115-06204	RT40R9M4	RT40R	34 lbs (150)	8.46" (215)	2.0" (51)	.16" (4.0)		1000
115-06200	RT40R0C2	RT40R	34 lbs (150)	8.46" (215)	2.0" (51)	.16" (4.0)	Black	100
115-06202	RT40R0M4	RT40R	34 lbs (150)	8.46" (215)	2.0" (51)	.16" (4.0)		1000
RT50S								
115-06319	RT50S9C2	RT50S	50 lbs (225)	6.5" (165)	1.38" (35)	.18" (4.6)	Natural	100
115-06304	RT50S9M4	RT50S	50 lbs (225)	6.5" (165)	1.38" (35)	.18" (4.6)		1000
115-06300	RT50S0C2	RT50S	50 lbs (225)	6.5" (165)	1.38" (35)	.18" (4.6)	Black	100
115-00035	RT50S0M4	RT50S	50 lbs (225)	6.5" (165)	1.38" (35)	.18" (4.6)		1000
RT50LL								
115-06102	RT50LL9C2	RT50LL	50 lbs (225)	15" (380)	3.98" (101)	.18" (4.6)	Natural	100
115-06104	RT50LL9M4	RT50LL	50 lbs (225)	15" (380)	3.98" (101)	.18" (4.6)		1000
115-00039	RT50LL0C2	RT50LL	50 lbs (225)	15" (380)	3.98" (101)	.18" (4.6)	Black	100
115-06101	RT50LL0M4	RT50LL	50 lbs (225)	15" (380)	3.98" (101)	.18" (4.6)		1000

Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.