

## RTT750HR.NX1P

Speedy Tie, 200lb. 29.52" Max. Bun. Dia 8.27" PA66, Yellow, 25/pk

Article Number: 115-00000

Part Number: RTT750HR.NX1P

Type: RTT750HR

Material: PA66



### 1. Base Data

---

**Part No.** RTT750HR.NX1P

**Type** RTT750HR


**Color** Yellow

**Features** An entirely new design in cable management, the SpeedyTie is a fully re-usable, easily releasable lashing tie. The SpeedyTie's unique design allows it to be released with one hand. - Just one click to tie and untie - Fully re-usable - Once applied, the ta

## Application


The SpeedyTie is a versatile tool for countless applications: - Electrical Contractors - Heating & Ventilation Contractors - Residential Construction - General and Heavy Industry - Packaging - Tubing and Pipe Bundling - An "Extra Hand" for Overhead Instal

## 2. Product Dimensions

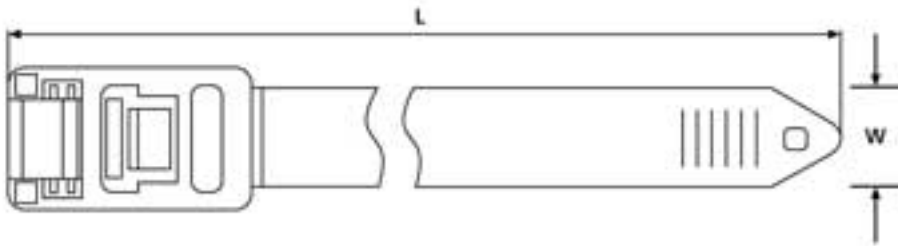

<b>Min. Tensile Strength</b>	200 lbs / 888 N
<b>Length (L)</b>	29.52 " / 750 mm
<b>Width (W)</b>	.51 " / 13.0 mm
<b>Min. Ø Bundle</b>	1.57 " / 40.0 mm
<b>Max. Ø Bundle</b>	8.27 " / 210 mm

## 4. Material and Specifications

<b>Material</b>	Polyamide 6.6 (PA66)
<b>Material Shortcut</b>	PA66
<b>Flammability</b>	UL94 V2
<b>Operating Temperature</b>	-40 °F to +185 °F (-40 °C to +85 °C) continuous
<b>ROHS Conformity</b>	

## Logistic and Packaging

---

**Packaging Type** bag

**Pkg. Qty.** 25

**Carton Qty.** 1 Pieces

**EAN code** 4031026229461

**UPC** 08930623649


## Speedy Tie

An entirely new design in cable management, the SpeedyTie is a fully re-usable, easily releasable lashing tie. The SpeedyTie's unique design allows it to be released with one hand.

- Just one click to tie and untie
- Fully re-usable
- Once applied, the tail can be neatly tucked away for added safety
- Highly visible yellow color — also available in black, high impact modified material
- Versatile design allows use for multiple applications

The SpeedyTie is a versatile tool for countless applications:

- Electrical Contractors
- Heating & Ventilation Contractors
- Residential Construction
- General and Heavy Industry
- Packaging
- Tubing and Pipe Bundling
- An "Extra Hand" for Overhead Installations
- In Plant Transfer of Products

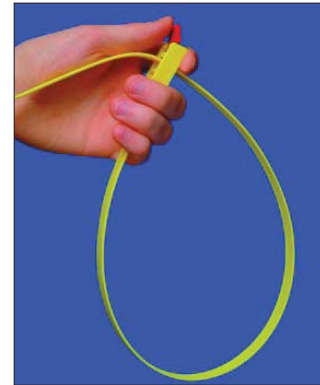

SpeedyTie - Quick and easy.



Speedy Tie is particularly suited for temporary but safe bundling or fixing.

### Packaging Configurations

#### Distributor Packs

- Printed bag with a hang hole
- Display box
- 60 SpeedyTies - 12 bags of 5


#### OEM Packs

- Plain bag (no hang hole)
- Standard box
- 300 SpeedyTies - 12 bags of 25



Distributor Pack - point of purchase display for the SpeedyTie.

Material Data	
Material	<b>Polyamide 6.6 (PA66)</b>
Color	<b>Yellow , Red</b>
Operating Temperature	<b>-40 °F to +185 °F</b> <b>(-40 °C to +85 °C) continuous</b>
Flammability	<b>UL94 V2</b>

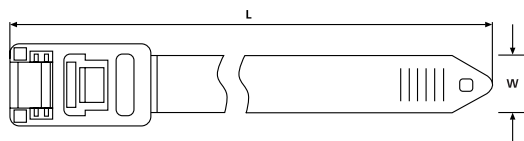

Product Selection		Type	Description	Min. Tensile Strength	Length (L)	Max. Ø Bundle	Width (W)	Pkg. Qty.	Carton Qty.
Article No.	Part No.			lbs. (N)	in. (mm)	in. (mm)	in. (mm)		
115-00001	<b>RTT750HR.NX900</b>	RTT750HR	Distributor Pack - order in carton qty. only	200 lbs (888)	29.52" (750)	8.27" (210)	.51" (13)	5	60
115-00000	<b>RTT750HR.NX1P</b>	RTT750HR	OEM Pack - order in carton qty. only	200 lbs (888)	29.52" (750)	8.27" (210)	.51" (13)	25	300

Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.