

## T150XLL9X2

Heavy Duty Cable Tie, 175 lb. 52.17" Max. Bun. Dia. 15.95" PA66, Natural, 25/pk

Article Number: 111-15304

Part Number: T150XLL9X2

Type: T150XLL

Material: PA66



### 1. Base Data

---


<b>Part No.</b>	T150XLL9X2
<b>Type</b>	T150XLL
<b>Color</b>	Natural
<b>Features</b>	HellermannTyton manufactures a full line of high quality cable ties in a variety of styles, sizes, materials, and colors. HellermannTyton cable ties are engineered and manufactured for maximum performance and quality.
<b>Application</b>	Used to bundle and secure wire and cable.

**Application Method**

Quick, simple application by hand or with HellermannTyton tensioning tools.

## 2. Product Dimensions

---

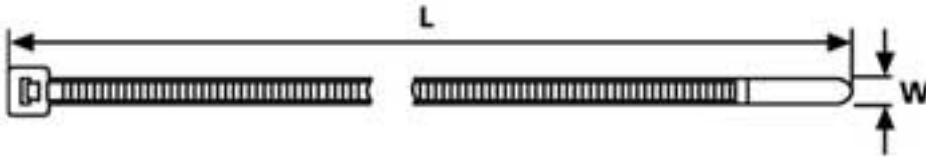**Min. Tensile Strength**

175 lbs / 780 N

**Length (L)**

52.17 " / 1325 mm

**Width (W)**

.35 " / 8.9 mm

**Min. Ø Bundle**

6.00 " / 152 mm

**Max. Ø Bundle**

15.95 " / 405 mm

**Cable Tie Head Height**

9.5 mm

**Cable Tie Head Length**

14 mm

**Cable Tie Head Width**

14 mm

**Thickness**

2.1

## 4. Material and Specifications

---

**Material**

Polyamide 6.6 (PA66)

**Material Shortcut**

PA66

**Flammability**

UL94 V2

**Operating Temperature**

-40 °F to +185 °F (-40 °C to +85 °C)  
continuous



### Logistic and Packaging

---


Packaging Type	bag
Pkg. Qty.	25
Carton Qty.	500
UPC	08930616497

### Miscellaneous

---

UL Listed (US and Canada)	Yes
UL Recognized (US and Canada)	Yes

### Heavy Duty Cable Ties



Material Data	
Material	Polyamide 6.6 (PA66)
Operating Temperature	-40 °F to +185 °F (-40 °C to +85 °C) continuous
Flammability	UL94 V2



### T120 Series



File# E64139

File# E64139

Product Selection													
Article No.	Part No.	Type	US Gov. Designation	Min. Tensile Strength		Length (L)		Max. Ø Bundle		Width (W)	Color	Pkg. Qty.	
				lbs.	(N)	in.	(mm)	in.	(mm)				in.
<b>T120S</b>													
111-12819	<b>T120S9K2</b>	T120S	-	120 lbs	(535)	8.85"	(225)	2.17"	(55)	.30"	(7.6)	Natural	50
111-12813	<b>T120S9H4</b>	T120S	-	120 lbs	(535)	8.85"	(225)	2.17"	(55)	.30"	(7.6)	Natural	500
111-12803	<b>T120S0K2</b>	T120S	-	120 lbs	(535)	8.85"	(225)	2.17"	(55)	.30"	(7.6)	Black	50
111-12808	<b>T120S0H4</b>	T120S	-	120 lbs	(535)	8.85"	(225)	2.17"	(55)	.30"	(7.6)	Black	500
<b>T120I</b>													
111-12211	<b>T120I9K2</b>	T120I	-	120 lbs	(535)	11.81"	(300)	3.15"	(80)	.30"	(7.6)	Natural	50
111-12213	<b>T120I9H4</b>	T120I	-	120 lbs	(535)	11.81"	(300)	3.15"	(80)	.30"	(7.6)	Natural	500
111-12201	<b>T120I0K2</b>	T120I	-	120 lbs	(535)	11.81"	(300)	3.15"	(80)	.30"	(7.6)	Black	50
111-12206	<b>T120I0H4</b>	T120I	-	120 lbs	(535)	11.81"	(300)	3.15"	(80)	.30"	(7.6)	Black	500
<b>T120R</b>													
112-12019	<b>T120R9K2</b>	T120R	MS3367-3-9	120 lbs	(535)	15.24"	(387)	4.13"	(105)	.30"	(7.6)	Natural	50
111-12036	<b>T120R9H4</b>	T120R	MS3367-3-9	120 lbs	(535)	15.24"	(387)	4.13"	(105)	.30"	(7.6)	Natural	500
112-12060	<b>T120R0K2</b>	T120R	*	120 lbs	(535)	15.24"	(390)	4.13"	(105)	.30"	(7.6)	Black	50
111-12013	<b>T120R0H4</b>	T120R	*	120 lbs	(535)	15.24"	(387)	4.13"	(105)	.30"	(7.6)	Black	500
<b>T120L</b>													
111-12419	<b>T120L9K2</b>	T120L	MS3367-6-9	120 lbs	(535)	30.0"	(760)	8.85"	(225)	.30"	(7.6)	Natural	50
111-12405	<b>T120L0K2</b>	T120L	*	120 lbs	(535)	30.0"	(760)	8.85"	(225)	.30"	(7.6)	Black	50

Installation tools - MK9, MK9HT, MK9P. Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes. \*Military black available. Contact HellaermannTyton for more information.

### T150 Series



File# E64139

Product Selection													
Article No.	Part No.	Type	US Gov. Designation	Min. Tensile Strength		Length (L)		Max. Ø Bundle		Width (W)	Color	Pkg. Qty.	
				lbs.	(N)	in.	(mm)	in.	(mm)				in.
<b>T150R</b>													
111-15203	<b>T150R9X2</b>	T150R(U)	-	175 lbs	(780)	15.35"	(390)	4.13"	(105)	.35"	(8.8)	Natural	25
111-15200	<b>T150R0X2</b>	T150R(U)	-	175 lbs	(780)	15.35"	(390)	4.13"	(105)	.35"	(8.8)	Black	25
<b>T150M</b>													
111-15619	<b>T150M9X2</b>	T150M	-	175 lbs	(780)	21.00"	(530)	5.91"	(150)	.35"	(8.9)	Natural	25
111-00124	<b>T150M0X2</b>	T150M	-	175 lbs	(780)	21.00"	(530)	5.91"	(150)	.35"	(8.9)	Black	25
<b>T150L</b>													
111-15419	<b>T150L9X2</b>	T150L	-	175 lbs	(780)	32.28"	(820)	9.65"	(245)	.35"	(8.9)	Natural	25
111-15405	<b>T150L0X2</b>	T150L	-	175 lbs	(780)	32.28"	(820)	9.65"	(245)	.35"	(8.9)	Black	25
<b>T150LL</b>													
111-15719	<b>T150LL9X2</b>	T150LL	-	175 lbs	(780)	36.42"	(925)	10.83"	(275)	.35"	(8.9)	Natural	25
111-15700	<b>T150LL0X2</b>	T150LL	-	175 lbs	(780)	36.42"	(925)	10.83"	(275)	.35"	(8.9)	Black	25
<b>T150XL</b>													
111-15519	<b>T150XL9X2</b>	T150XL	-	175 lbs	(780)	43.11"	(1095)	13.00"	(330)	.35"	(8.9)	Natural	25
111-15500	<b>T150XL0X2</b>	T150XL	-	175 lbs	(780)	43.11"	(1095)	13.00"	(330)	.35"	(8.9)	Black	25
<b>T150XLL</b>													
111-15304	<b>T150XLL9X2</b>	T150XLL	-	175 lbs	(780)	52.17"	(1325)	15.95"	(405)	.35"	(8.9)	Natural	25
111-15300	<b>T150XLL0X2</b>	T150XLL	-	175 lbs	(780)	52.17"	(1325)	15.95"	(405)	.35"	(8.9)	Black	25

Installation tools - MK9, MK9HT, MK9P. Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.