

## T18LOC2

Cable Tie, 18lb, 8.0", Max. Bun. Dia. 2.17" PA66, Black, 100/PK

Article Number: 111-00401

Part Number: T18LOC2

Type: T18L

Material: PA66



### 1. Base Data

---


<b>Part No.</b>	T18LOC2
<b>Type</b>	T18L
<b>Color</b>	Black (BK)
<b>Features</b>	HellermannTyton manufactures a full line of high quality cable ties in a variety of styles, sizes, materials, and colors. HellermannTyton cable ties are engineered and manufactured for maximum performance and quality.
<b>Application</b>	Used to bundle and secure wire and cable.

**Application Method**

Quick, simple application by hand or with HellermannTyton tensioning tools.

## 2. Product Dimensions

---

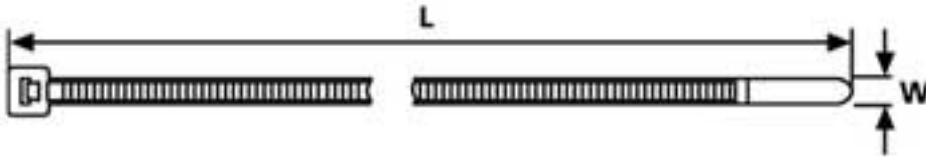**Min. Tensile Strength**

18 lbs / 80 N

**Length (L)**

8.0 " / 205 mm

**Width (W)**

.10 " / 2.5 mm

**Min. Ø Bundle**

.06 " / 1.5 mm

**Max. Ø Bundle**

2.17 " / 55.0 mm

## 4. Material and Specifications

---

**Material**

Polyamide 6.6 (PA66)

**Material Shortcut**

PA66

**Flammability**

UL94 V2

**Operating Temperature**

-40 °F to +185 °F (-40 °C to +85 °C)  
continuous

**ROHS Conformity**

## Logistic and Packaging

---

**Packaging Type**

bag

<b>Pkg. Qty.</b>	100
<b>Carton Qty.</b>	10000
<b>EAN code</b>	4031026274430
<b>UPC</b>	08930606551

### **Miscellaneous**

---


**UL Listed (US and Canada)** Yes

**UL Recognized (US and Canada)** Yes

# Cable Ties

## Standard Cable Ties T18 - T30 Series - Natural and Black

Material Data	
Material	Polyamide 6.6 (PA66)
Operating Temperature	-40 °F to +185 °F (-40 °C to +85 °C) continuous
Flammability	UL94 V2



Product Selection

Article No.	Part No.	Type	US Gov. Designation	Min. Tensile Strength		Length (L)		Max. Ø Bundle		Width (W)		Color	Pkg. Qty.
				lbs.	(N)	in.	(mm)	in.	(mm)	in.	(mm)		
<b>T18S</b>													
111-02805	<b>T18S9C2</b>	T18S	MS3367-4-9	18 lbs	(80)	3.27"	(83)	.63"	(16)	.09"	(2.3)	Natural	100
111-02809	<b>T18S9M4</b>	T18S	MS3367-4-9	18 lbs	(80)	3.27"	(83)	.63"	(16)	.09"	(2.3)		1000
111-02810	<b>T18S0C2</b>	T18S	*	18 lbs	(80)	3.27"	(83)	.63"	(16)	.09"	(2.3)	Black	100
111-02811	<b>T18S0M4</b>	T18S	*	18 lbs	(80)	3.27"	(83)	.63"	(16)	.09"	(2.3)		1000
<b>T18R</b>													
112-01819	<b>T18R9C2</b>	T18R	MS3367-4-9	18 lbs	(80)	4"	(100)	.87"	(22)	.10"	(2.5)	Natural	100
111-01872	<b>T18R9M4</b>	T18R	MS3367-4-9	18 lbs	(80)	4"	(100)	.87"	(22)	.10"	(2.5)		1000
111-00405	<b>T18R0C2</b>	T18R	*	18 lbs	(80)	4"	(100)	.87"	(22)	.10"	(2.5)	Black	100
111-01841	<b>T18R0M4</b>	T18R	*	18 lbs	(80)	4"	(100)	.87"	(22)	.10"	(2.5)		1000
<b>T18I</b>													
111-02311	<b>T18I9C2</b>	T18I	-	18 lbs	(80)	5.51"	(140)	1.38"	(35)	.10"	(2.5)	Natural	100
111-02322	<b>T18I9M4</b>	T18I	-	18 lbs	(80)	5.51"	(140)	1.38"	(35)	.10"	(2.5)		1000
111-02308	<b>T18I0C2</b>	T18I	-	18 lbs	(80)	5.51"	(140)	1.38"	(35)	.10"	(2.5)	Black	100
111-02315	<b>T18I0M4</b>	T18I	-	18 lbs	(80)	5.51"	(140)	1.38"	(35)	.10"	(2.5)		1000
<b>T18L</b>													
111-02189	<b>T18L9C2</b>	T18L	-	18 lbs	(80)	8.0"	(205)	2.17"	(55)	.10"	(2.5)	Natural	100
111-02026	<b>T18L9M4</b>	T18L	-	18 lbs	(80)	8.0"	(205)	2.17"	(55)	.10"	(2.5)		1000
111-00401	<b>T18L0C2</b>	T18L	-	18 lbs	(80)	8.0"	(205)	2.17"	(55)	.10"	(2.5)	Black	100
111-02015	<b>T18L0M4</b>	T18L	-	18 lbs	(80)	8.0"	(205)	2.17"	(55)	.10"	(2.5)		1000
<b>T30R</b>													
112-03019	<b>T30R9C2</b>	T30R	MS3367-5-9	30 lbs	(135)	5.9"	(150)	1.38"	(35)	.14"	(3.5)	Natural	100
111-03047	<b>T30R9M4</b>	T30R	MS3367-5-9	30 lbs	(135)	5.9"	(150)	1.38"	(35)	.14"	(3.5)		1000
111-00438	<b>T30R0C2</b>	T30R	*	30 lbs	(135)	5.9"	(150)	1.38"	(35)	.14"	(3.5)	Black	100
111-03034	<b>T30R0M4</b>	T30R	*	30 lbs	(135)	5.9"	(150)	1.38"	(35)	.14"	(3.5)		1000
<b>T30L</b>													
111-03325	<b>T30L9C2</b>	T30L	-	30 lbs	(135)	7.48"	(190)	1.97"	(50)	.14"	(3.5)	Natural	100
111-03327	<b>T30L9M4</b>	T30L	-	30 lbs	(135)	7.48"	(190)	1.97"	(50)	.14"	(3.5)		1000
111-03313	<b>T30L0C2</b>	T30L	-	30 lbs	(135)	7.48"	(190)	1.97"	(50)	.14"	(3.5)	Black	100
111-03315	<b>T30L0M4</b>	T30L	-	30 lbs	(135)	7.48"	(190)	1.97"	(50)	.14"	(3.5)		1000
<b>T30LL</b>													
111-03515	<b>T30LL9C2</b>	T30LL	-	30 lbs	(135)	11.42"	(290)	3.15"	(80)	.14"	(3.5)	Natural	100
111-03517	<b>T30LL9M4</b>	T30LL	-	30 lbs	(135)	11.42"	(290)	3.15"	(80)	.14"	(3.5)		1000
111-03501	<b>T30LL0C2</b>	T30LL	-	30 lbs	(135)	11.42"	(290)	3.15"	(80)	.14"	(3.5)	Black	100
111-03511	<b>T30LL0M4</b>	T30LL	-	30 lbs	(135)	11.42"	(290)	3.15"	(80)	.14"	(3.5)		1000
<b>T30XL</b>													
111-02900	<b>T30XL9C2</b>	T30XL	MS3367-5-9	30 lbs	(135)	14.37"	(365)	4.13"	(105)	.14"	(3.5)	Natural	100
111-02907	<b>T30XL9M4</b>	T30XL	MS3367-5-9	30 lbs	(135)	14.37"	(365)	4.13"	(105)	.14"	(3.5)		1000
111-02901	<b>T30XL0C2</b>	T30XL	*	30 lbs	(135)	14.37"	(365)	4.13"	(105)	.14"	(3.5)	Black	100
111-02903	<b>T30XL0M4</b>	T30XL	*	30 lbs	(135)	14.37"	(365)	4.13"	(105)	.14"	(3.5)		1000

Installation tools - MK7, MK7HT, MK7P, MK9, MK9HT, MK9P. MK9 and MK9P cannot be used with T18S cable ties.

Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.

\* Military black available. Contact HellermannTyton for more information.