

## T250R9X2

Heavy Duty Cable Tie, 250 lb. 20.47" Max. Bun. Dia. 5.17" PA66, Natural, 25/pk

Article Number: 111-24803

Part Number: T250R9X2

Type: T250R

Material: PA66



### 1. Base Data


<b>Part No.</b>	T250R9X2
<b>Type</b>	T250R
<b>Color</b>	Natural
<b>Features</b>	These cable ties offer a high minimum tensile strength and have a buckle feature which allows the end of the cable tie to be tucked away if necessary. The buckle also snaps into HellermannTyton LTM, lashing tie mounts.
<b>Application</b>	Used to bundle and secure wire and cable.

**Application Method**

Quick, simple application by hand or with HellermannTyton tensioning tools.

## 2. Product Dimensions

---

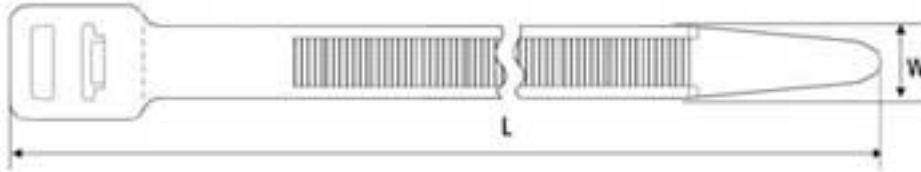**Min. Tensile Strength**

250 lbs / 1115 N

**Length (L)**

20.47 " / 520 mm

**Width (W)**

.49 " / 12.5 mm

**Min. Ø Bundle**

.98 " / 25.0 mm

**Max. Ø Bundle**

5.71 " / 145 mm

## 4. Material and Specifications

---

**Material**

Polyamide 6.6 (PA66)

**Material Shortcut**

PA66

**Flammability**

UL94 V2

**Operating Temperature**

-40 °F to +185 °F (-40 °C to +85 °C)  
continuous

**ROHS Conformity**

## Logistic and Packaging

---

**Packaging Type**

bag

<b>Pkg. Qty.</b>	25
<b>Carton Qty.</b>	500
<b>UPC</b>	08930607281

**Miscellaneous**

---

**UL Recognized (US and Canada)** Yes

## Cable Ties


### Heavy Duty Cable Ties T250 Series

These cable ties offer a high minimum tensile strength and have a buckle feature which allows the end of the cable tie to be tucked away if necessary. The buckle also snaps into HellermannTyton LTM, lashing tie mounts.



T250 heavy duty cable tie and lashing tie mount application

Material Data	
Material	<b>Polyamide 6.6 (PA66)</b>
Operating Temperature	<b>-40 °F to +185 °F (-40 °C to +85 °C) continuous</b>
Flammability	<b>UL94 V2</b>



**US**  
File# E64139

Product Selection		Type	Min. Tensile Strength		Length (L)		Max. Ø Bundle		Width (W)		Color	Pkg. Qty.
Article No.	Part No.		lbs.	(N)	in.	(mm)	in.	(mm)	in.	(mm)		
<b>T250S</b>												
111-24702	<b>T250S9X2</b>	T250S	250 lbs	(1115)	9.05"	(230)	2.17"	(55)	.49"	(12.5)	Natural	25
111-24700	<b>T250S0X2</b>	T250S	250 lbs	(1115)	9.05"	(230)	2.17"	(55)	.49"	(12.5)	Black	25
<b>T250R</b>												
111-24803	<b>T250R9X2</b>	T250R	250 lbs	(1115)	20.47"	(520)	5.71"	(145)	.49"	(12.5)	Natural	25
111-24801	<b>T250R0X2</b>	T250R	250 lbs	(1115)	20.47"	(520)	5.71"	(145)	.49"	(12.5)	Black	25
<b>T250M</b>												
111-25002	<b>T250M9X2</b>	T250M	250 lbs	(1115)	22.24"	(565)	5.90"	(150)	.49"	(12.5)	Natural	25
111-25001	<b>T250M0X2</b>	T250M	250 lbs	(1115)	22.24"	(565)	5.90"	(150)	.49"	(12.5)	Black	25
<b>T250I</b>												
111-25219	<b>T250I9X2</b>	T250I	250 lbs	(1115)	28.54"	(725)	8.00"	(203)	.49"	(12.5)	Natural	25
111-00507	<b>T250I0X2</b>	T250I	250 lbs	(1115)	28.54"	(725)	8.00"	(203)	.49"	(12.5)	Black	25
<b>T250L</b>												
111-00436	<b>T250L9X2</b>	T250L	250 lbs	(1115)	34.65"	(880)	10.00"	(254)	.49"	(12.5)	Natural	25
111-24601	<b>T250L0X2</b>	T250L	250 lbs	(1115)	34.65"	(880)	10.00"	(254)	.49"	(12.5)	Black	25
<b>T250XL</b>												
111-00466	<b>T250XL9X2</b>	T250XL	250 lbs	(1115)	40.55"	(1030)	12.00"	(305)	.49"	(12.5)	Natural	25
111-25200	<b>T250XL0X2</b>	T250XL	250 lbs	(1115)	40.55"	(1030)	12.00"	(305)	.49"	(12.5)	Black	25

Installation tools - MK9, MK9HT, MK9P. Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.