

T30L9M4

Cable Tie, 30 lb. 7.48" Max. Bun. Dia. 1.97" PA66, Natural, 1000/pk

Article Number: 111-03327

Part Number: T30L9M4

Type: T30L


Material: PA66



1. Base Data


| | |
|---------------------------|---|
| Part No. | T30L9M4 |
| Type | T30L |
| Color | Natural |
| Features | HellermannTyton manufactures a full line of high quality cable ties in a variety of styles, sizes, materials, and colors. HellermannTyton cable ties are engineered and manufactured for maximum performance and quality. |
| Application | Used to bundle and secure wire and cable. |
| Application Method | Quick, simple application by hand or with HellermannTyton tensioning tools. |

2. Product Dimensions

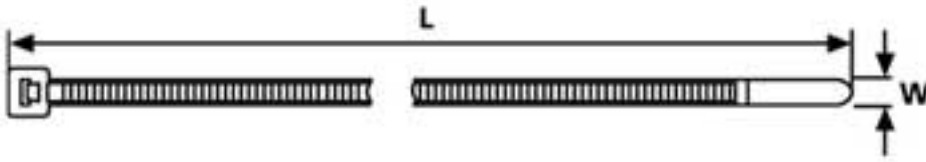

| | |
|------------------------------|------------------|
| Min. Tensile Strength | 30 lbs / 135 |
| Length (L) | 7.48 " / 190 mm |
| Width (W) | .14 " / 3.5 mm |
| Min. Ø Bundle | .06 " / 1.5 mm |
| Max. Ø Bundle | 1.97 " / 50.0 mm |

4. Material and Specifications

| | |
|------------------------------|---|
| Material | Polyamide 6.6 (PA66) |
| Material Shortcut | PA66 |
| Flammability | UL94 V2 |
| Operating Temperature | -40 °F to +185 °F (-40 °C to +85 °C) continuous |
| ROHS Conformity |  |

Logistic and Packaging

| | |
|-----------------------|-------------|
| Packaging Type | bag |
| Pkg. Qty. | 1000 |
| Carton Qty. | 5000 |
| UPC | 08930627309 |

Miscellaneous


UL Listed (US and Canada) Yes

UL Recognized (US and Canada) Yes

Cable Ties

Standard Cable Ties T18 - T30 Series - Natural and Black

| | |
|-----------------------|---|
| Material Data | |
| Material | Polyamide 6.6 (PA66) |
| Operating Temperature | -40 °F to +185 °F (-40 °C to +85 °C) continuous |
| Flammability | UL94 V2 |



Product Selection

| Article No. | Part No. | Type | US Gov. Designation | Min. Tensile Strength | | Length (L) | | Max. Ø Bundle | | Width (W) | | Color | Pkg. Qty. |
|--------------|----------|-------|---------------------|-----------------------|-------|------------|-------|---------------|-------|-----------|-------|---------|-----------|
| | | | | lbs. | (N) | in. | (mm) | in. | (mm) | in. | (mm) | | |
| T18S | | | | | | | | | | | | | |
| 111-02805 | T18S9C2 | T18S | MS3367-4-9 | 18 lbs | (80) | 3.27" | (83) | .63" | (16) | .09" | (2.3) | Natural | 100 |
| 111-02809 | T18S9M4 | T18S | MS3367-4-9 | 18 lbs | (80) | 3.27" | (83) | .63" | (16) | .09" | (2.3) | | 1000 |
| 111-02810 | T18S0C2 | T18S | * | 18 lbs | (80) | 3.27" | (83) | .63" | (16) | .09" | (2.3) | Black | 100 |
| 111-02811 | T18S0M4 | T18S | * | 18 lbs | (80) | 3.27" | (83) | .63" | (16) | .09" | (2.3) | | 1000 |
| T18R | | | | | | | | | | | | | |
| 112-01819 | T18R9C2 | T18R | MS3367-4-9 | 18 lbs | (80) | 4" | (100) | .87" | (22) | .10" | (2.5) | Natural | 100 |
| 111-01872 | T18R9M4 | T18R | MS3367-4-9 | 18 lbs | (80) | 4" | (100) | .87" | (22) | .10" | (2.5) | | 1000 |
| 111-00405 | T18R0C2 | T18R | * | 18 lbs | (80) | 4" | (100) | .87" | (22) | .10" | (2.5) | Black | 100 |
| 111-01841 | T18R0M4 | T18R | * | 18 lbs | (80) | 4" | (100) | .87" | (22) | .10" | (2.5) | | 1000 |
| T18I | | | | | | | | | | | | | |
| 111-02311 | T18I9C2 | T18I | - | 18 lbs | (80) | 5.51" | (140) | 1.38" | (35) | .10" | (2.5) | Natural | 100 |
| 111-02322 | T18I9M4 | T18I | - | 18 lbs | (80) | 5.51" | (140) | 1.38" | (35) | .10" | (2.5) | | 1000 |
| 111-02308 | T18I0C2 | T18I | - | 18 lbs | (80) | 5.51" | (140) | 1.38" | (35) | .10" | (2.5) | Black | 100 |
| 111-02315 | T18I0M4 | T18I | - | 18 lbs | (80) | 5.51" | (140) | 1.38" | (35) | .10" | (2.5) | | 1000 |
| T18L | | | | | | | | | | | | | |
| 111-02189 | T18L9C2 | T18L | - | 18 lbs | (80) | 8.0" | (205) | 2.17" | (55) | .10" | (2.5) | Natural | 100 |
| 111-02026 | T18L9M4 | T18L | - | 18 lbs | (80) | 8.0" | (205) | 2.17" | (55) | .10" | (2.5) | | 1000 |
| 111-00401 | T18L0C2 | T18L | - | 18 lbs | (80) | 8.0" | (205) | 2.17" | (55) | .10" | (2.5) | Black | 100 |
| 111-02015 | T18L0M4 | T18L | - | 18 lbs | (80) | 8.0" | (205) | 2.17" | (55) | .10" | (2.5) | | 1000 |
| T30R | | | | | | | | | | | | | |
| 112-03019 | T30R9C2 | T30R | MS3367-5-9 | 30 lbs | (135) | 5.9" | (150) | 1.38" | (35) | .14" | (3.5) | Natural | 100 |
| 111-03047 | T30R9M4 | T30R | MS3367-5-9 | 30 lbs | (135) | 5.9" | (150) | 1.38" | (35) | .14" | (3.5) | | 1000 |
| 111-00438 | T30R0C2 | T30R | * | 30 lbs | (135) | 5.9" | (150) | 1.38" | (35) | .14" | (3.5) | Black | 100 |
| 111-03034 | T30R0M4 | T30R | * | 30 lbs | (135) | 5.9" | (150) | 1.38" | (35) | .14" | (3.5) | | 1000 |
| T30L | | | | | | | | | | | | | |
| 111-03325 | T30L9C2 | T30L | - | 30 lbs | (135) | 7.48" | (190) | 1.97" | (50) | .14" | (3.5) | Natural | 100 |
| 111-03327 | T30L9M4 | T30L | - | 30 lbs | (135) | 7.48" | (190) | 1.97" | (50) | .14" | (3.5) | | 1000 |
| 111-03313 | T30L0C2 | T30L | - | 30 lbs | (135) | 7.48" | (190) | 1.97" | (50) | .14" | (3.5) | Black | 100 |
| 111-03315 | T30L0M4 | T30L | - | 30 lbs | (135) | 7.48" | (190) | 1.97" | (50) | .14" | (3.5) | | 1000 |
| T30LL | | | | | | | | | | | | | |
| 111-03515 | T30LL9C2 | T30LL | - | 30 lbs | (135) | 11.42" | (290) | 3.15" | (80) | .14" | (3.5) | Natural | 100 |
| 111-03517 | T30LL9M4 | T30LL | - | 30 lbs | (135) | 11.42" | (290) | 3.15" | (80) | .14" | (3.5) | | 1000 |
| 111-03501 | T30LL0C2 | T30LL | - | 30 lbs | (135) | 11.42" | (290) | 3.15" | (80) | .14" | (3.5) | Black | 100 |
| 111-03511 | T30LL0M4 | T30LL | - | 30 lbs | (135) | 11.42" | (290) | 3.15" | (80) | .14" | (3.5) | | 1000 |
| T30XL | | | | | | | | | | | | | |
| 111-02900 | T30XL9C2 | T30XL | MS3367-5-9 | 30 lbs | (135) | 14.37" | (365) | 4.13" | (105) | .14" | (3.5) | Natural | 100 |
| 111-02907 | T30XL9M4 | T30XL | MS3367-5-9 | 30 lbs | (135) | 14.37" | (365) | 4.13" | (105) | .14" | (3.5) | | 1000 |
| 111-02901 | T30XL0C2 | T30XL | * | 30 lbs | (135) | 14.37" | (365) | 4.13" | (105) | .14" | (3.5) | Black | 100 |
| 111-02903 | T30XL0M4 | T30XL | * | 30 lbs | (135) | 14.37" | (365) | 4.13" | (105) | .14" | (3.5) | | 1000 |

Installation tools - MK7, MK7HT, MK7P, MK9, MK9HT, MK9P. MK9 and MK9P cannot be used with T18S cable ties.

Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.

* Military black available. Contact HellermannTyton for more information.