

## T30LLOC2

Cable Tie, 30 lb. 11.42" Max Bun. Dia. 3.15", PA66, Black, 100/Pk

Article Number: 111-03501

Part Number: T30LLOC2

Type: T30LL

Material: PA66




### 1. Base Data

<b>Part No.</b>	T30LLOC2
<b>Type</b>	T30LL
<b>Color</b>	Black (BK)
<b>Features</b>	HellermannTyton manufactures a full line of high quality cable ties in a variety of styles, sizes, materials, and colors. HellermannTyton cable ties are engineered and manufactured for maximum performance and quality.
<b>Application</b>	Used to bundle and secure wire and cable.
<b>Application Method</b>	Quick, simple application by hand or with HellermannTyton tensioning tools.

## 2. Product Dimensions


---

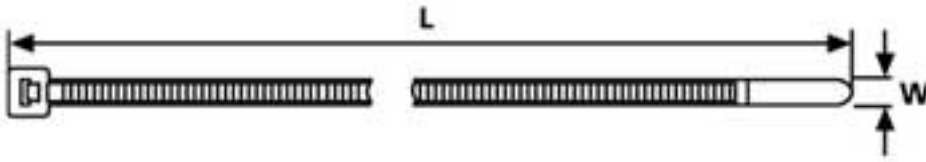

<b>Min. Tensile Strength</b>	30 lbs / 135 N
<b>Length (L)</b>	11.42 " / 290 mm
<b>Width (W)</b>	.14 " / 3.5 mm
<b>Min. Ø Bundle</b>	.06 " / 1.5 mm
<b>Max. Ø Bundle</b>	3.15 " / 80.0 mm

## 4. Material and Specifications

---

<b>Material</b>	Polyamide 6.6 (PA66)
<b>Material Shortcut</b>	PA66
<b>Flammability</b>	UL94 V2
<b>Operating Temperature</b>	-40 °F to +185 °F (-40 °C to +85 °C) continuous
<b>ROHS Conformity</b>	

## Logistic and Packaging

---

<b>Packaging Type</b>	bag
<b>Pkg. Qty.</b>	100
<b>Carton Qty.</b>	5000
<b>UPC</b>	08930627220

## Miscellaneous

---


UL Listed (US and Canada) Yes

UL Recognized (US and Canada) Yes

# Cable Ties

## Standard Cable Ties T18 - T30 Series - Natural and Black

Material Data	
Material	Polyamide 6.6 (PA66)
Operating Temperature	-40 °F to +185 °F (-40 °C to +85 °C) continuous
Flammability	UL94 V2



Product Selection													
Article No.	Part No.	Type	US Gov. Designation	Min. Tensile Strength		Length (L)		Max. Ø Bundle		Width (W)		Color	Pkg. Qty.
				lbs.	(N)	in.	(mm)	in.	(mm)	in.	(mm)		
<b>T18S</b>													
111-02805	<b>T18S9C2</b>	T18S	MS3367-4-9	18 lbs	(80)	3.27"	(83)	.63"	(16)	.09"	(2.3)	Natural	100
111-02809	<b>T18S9M4</b>	T18S	MS3367-4-9	18 lbs	(80)	3.27"	(83)	.63"	(16)	.09"	(2.3)		1000
111-02810	<b>T18S0C2</b>	T18S	*	18 lbs	(80)	3.27"	(83)	.63"	(16)	.09"	(2.3)	Black	100
111-02811	<b>T18S0M4</b>	T18S	*	18 lbs	(80)	3.27"	(83)	.63"	(16)	.09"	(2.3)		1000
<b>T18R</b>													
112-01819	<b>T18R9C2</b>	T18R	MS3367-4-9	18 lbs	(80)	4"	(100)	.87"	(22)	.10"	(2.5)	Natural	100
111-01872	<b>T18R9M4</b>	T18R	MS3367-4-9	18 lbs	(80)	4"	(100)	.87"	(22)	.10"	(2.5)		1000
111-00405	<b>T18R0C2</b>	T18R	*	18 lbs	(80)	4"	(100)	.87"	(22)	.10"	(2.5)	Black	100
111-01841	<b>T18R0M4</b>	T18R	*	18 lbs	(80)	4"	(100)	.87"	(22)	.10"	(2.5)		1000
<b>T18I</b>													
111-02311	<b>T18I9C2</b>	T18I	-	18 lbs	(80)	5.51"	(140)	1.38"	(35)	.10"	(2.5)	Natural	100
111-02322	<b>T18I9M4</b>	T18I	-	18 lbs	(80)	5.51"	(140)	1.38"	(35)	.10"	(2.5)		1000
111-02308	<b>T18I0C2</b>	T18I	-	18 lbs	(80)	5.51"	(140)	1.38"	(35)	.10"	(2.5)	Black	100
111-02315	<b>T18I0M4</b>	T18I	-	18 lbs	(80)	5.51"	(140)	1.38"	(35)	.10"	(2.5)		1000
<b>T18L</b>													
111-02189	<b>T18L9C2</b>	T18L	-	18 lbs	(80)	8.0"	(205)	2.17"	(55)	.10"	(2.5)	Natural	100
111-02026	<b>T18L9M4</b>	T18L	-	18 lbs	(80)	8.0"	(205)	2.17"	(55)	.10"	(2.5)		1000
111-00401	<b>T18L0C2</b>	T18L	-	18 lbs	(80)	8.0"	(205)	2.17"	(55)	.10"	(2.5)	Black	100
111-02015	<b>T18L0M4</b>	T18L	-	18 lbs	(80)	8.0"	(205)	2.17"	(55)	.10"	(2.5)		1000
<b>T30R</b>													
112-03019	<b>T30R9C2</b>	T30R	MS3367-5-9	30 lbs	(135)	5.9"	(150)	1.38"	(35)	.14"	(3.5)	Natural	100
111-03047	<b>T30R9M4</b>	T30R	MS3367-5-9	30 lbs	(135)	5.9"	(150)	1.38"	(35)	.14"	(3.5)		1000
111-00438	<b>T30R0C2</b>	T30R	*	30 lbs	(135)	5.9"	(150)	1.38"	(35)	.14"	(3.5)	Black	100
111-03034	<b>T30R0M4</b>	T30R	*	30 lbs	(135)	5.9"	(150)	1.38"	(35)	.14"	(3.5)		1000
<b>T30L</b>													
111-03325	<b>T30L9C2</b>	T30L	-	30 lbs	(135)	7.48"	(190)	1.97"	(50)	.14"	(3.5)	Natural	100
111-03327	<b>T30L9M4</b>	T30L	-	30 lbs	(135)	7.48"	(190)	1.97"	(50)	.14"	(3.5)		1000
111-03313	<b>T30L0C2</b>	T30L	-	30 lbs	(135)	7.48"	(190)	1.97"	(50)	.14"	(3.5)	Black	100
111-03315	<b>T30L0M4</b>	T30L	-	30 lbs	(135)	7.48"	(190)	1.97"	(50)	.14"	(3.5)		1000
<b>T30LL</b>													
111-03515	<b>T30LL9C2</b>	T30LL	-	30 lbs	(135)	11.42"	(290)	3.15"	(80)	.14"	(3.5)	Natural	100
111-03517	<b>T30LL9M4</b>	T30LL	-	30 lbs	(135)	11.42"	(290)	3.15"	(80)	.14"	(3.5)		1000
111-03501	<b>T30LL0C2</b>	T30LL	-	30 lbs	(135)	11.42"	(290)	3.15"	(80)	.14"	(3.5)	Black	100
111-03511	<b>T30LL0M4</b>	T30LL	-	30 lbs	(135)	11.42"	(290)	3.15"	(80)	.14"	(3.5)		1000
<b>T30XL</b>													
111-02900	<b>T30XL9C2</b>	T30XL	MS3367-5-9	30 lbs	(135)	14.37"	(365)	4.13"	(105)	.14"	(3.5)	Natural	100
111-02907	<b>T30XL9M4</b>	T30XL	MS3367-5-9	30 lbs	(135)	14.37"	(365)	4.13"	(105)	.14"	(3.5)		1000
111-02901	<b>T30XL0C2</b>	T30XL	*	30 lbs	(135)	14.37"	(365)	4.13"	(105)	.14"	(3.5)	Black	100
111-02903	<b>T30XL0M4</b>	T30XL	*	30 lbs	(135)	14.37"	(365)	4.13"	(105)	.14"	(3.5)		1000

Installation tools - MK7, MK7HT, MK7P, MK9, MK9HT, MK9P. MK9 and MK9P cannot be used with T18S cable ties.

Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.

\* Military black available. Contact HellermannTyton for more information.