

T30R9C2

Cable Tie, 30lb. 5.9", Max Bun Dia. 1.38" PA66 Natural, 100/Pk

Article Number: 112-03019

Part Number: T30R9C2

Type: T30R

Material: PA66



1. Base Data

Part No. T30R9C2

Type T30R

Color Natural


Features HellermannTyton manufactures a full line of high quality cable ties in a variety of styles, sizes, materials, and colors. HellermannTyton cable ties are engineered and manufactured for maximum performance and quality.

Application Used to bundle and secure wire and cable.

Application Method

Quick, simple application by hand or with HellermannTyton tensioning tools.

2. Product Dimensions

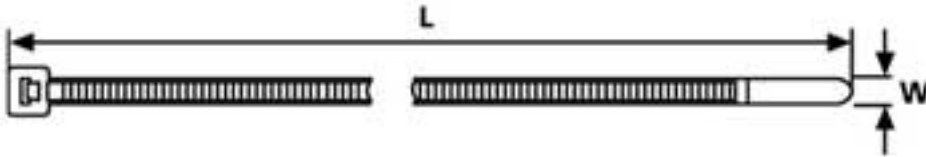**Min. Tensile Strength**

30 lbs / 135 N

Length (L)

5.9 " / 150 mm

Width (W)

.14 " / 3.5 mm

Min. Ø Bundle

.06 " / 1.5 mm

Max. Ø Bundle

1.38 " / 35.0 mm

4. Material and Specifications

Material

Polyamide 6.6 (PA66)

Material Shortcut

PA66

Flammability

UL94 V2

Operating Temperature

-40 °F to +176 °F (-40 °C to +80 °C)
continuous

ROHS Conformity**US Gov. Designation**

MS3367-5-9

Logistic and Packaging

| | |
|-----------------------|---------------|
| Packaging Type | bag |
| Pkg. Qty. | 100 Bag |
| Carton Qty. | 5000 |
| EAN code | 4031026107998 |
| UPC | 08930607683 |


Miscellaneous

| | |
|--------------------------------------|-----|
| UL Listed (US and Canada) | Yes |
| UL Recognized (US and Canada) | Yes |

Standard Cable Ties

T18 - T30 Series - Natural and Black

| | |
|-----------------------|--|
| Material Data | |
| Material | Polyamide 6.6 (PA66) |
| Operating Temperature | -40 °F to +185 °F (-40 °C to +85 °C) continuous |
| Flammability | UL94 V2 |



File# E64139

File# E64139

Product Selection

| Article No. | Part No. | Type | US Gov. Designation | Min. Tensile Strength | | Length (L) | | Max. Ø Bundle | | Width (W) | | Color | Pkg. Qty. |
|--------------|-----------------|-------|---------------------|-----------------------|-------|------------|-------|---------------|-------|-----------|-------|---------|-----------|
| | | | | lbs. | (N) | in. | (mm) | in. | (mm) | in. | (mm) | | |
| T18S | | | | | | | | | | | | | |
| 111-02805 | T18S9C2 | T18S | MS3367-4-9 | 18 lbs | (80) | 3.27" | (83) | .63" | (16) | .09" | (2.3) | Natural | 100 |
| 111-02809 | T18S9M4 | T18S | MS3367-4-9 | 18 lbs | (80) | 3.27" | (83) | .63" | (16) | .09" | (2.3) | | 1000 |
| 111-02810 | T18S0C2 | T18S | * | 18 lbs | (80) | 3.27" | (83) | .63" | (16) | .09" | (2.3) | Black | 100 |
| 111-02811 | T18S0M4 | T18S | * | 18 lbs | (80) | 3.27" | (83) | .63" | (16) | .09" | (2.3) | | 1000 |
| T18R | | | | | | | | | | | | | |
| 112-01819 | T18R9C2 | T18R | MS3367-4-9 | 18 lbs | (80) | 4" | (100) | .87" | (22) | .10" | (2.5) | Natural | 100 |
| 111-01872 | T18R9M4 | T18R | MS3367-4-9 | 18 lbs | (80) | 4" | (100) | .87" | (22) | .10" | (2.5) | | 1000 |
| 111-00405 | T18R0C2 | T18R | * | 18 lbs | (80) | 4" | (100) | .87" | (22) | .10" | (2.5) | Black | 100 |
| 111-01841 | T18R0M4 | T18R | * | 18 lbs | (80) | 4" | (100) | .87" | (22) | .10" | (2.5) | | 1000 |
| T18I | | | | | | | | | | | | | |
| 111-02311 | T18I9C2 | T18I | - | 18 lbs | (80) | 5.51" | (140) | 1.38" | (35) | .10" | (2.5) | Natural | 100 |
| 111-02322 | T18I9M4 | T18I | - | 18 lbs | (80) | 5.51" | (140) | 1.38" | (35) | .10" | (2.5) | | 1000 |
| 111-02308 | T18I0C2 | T18I | - | 18 lbs | (80) | 5.51" | (140) | 1.38" | (35) | .10" | (2.5) | Black | 100 |
| 111-02315 | T18I0M4 | T18I | - | 18 lbs | (80) | 5.51" | (140) | 1.38" | (35) | .10" | (2.5) | | 1000 |
| T18L | | | | | | | | | | | | | |
| 111-02189 | T18L9C2 | T18L | - | 18 lbs | (80) | 8.0" | (205) | 2.17" | (55) | .10" | (2.5) | Natural | 100 |
| 111-02026 | T18L9M4 | T18L | - | 18 lbs | (80) | 8.0" | (205) | 2.17" | (55) | .10" | (2.5) | | 1000 |
| 111-00401 | T18L0C2 | T18L | - | 18 lbs | (80) | 8.0" | (205) | 2.17" | (55) | .10" | (2.5) | Black | 100 |
| 111-02015 | T18L0M4 | T18L | - | 18 lbs | (80) | 8.0" | (205) | 2.17" | (55) | .10" | (2.5) | | 1000 |
| T30R | | | | | | | | | | | | | |
| 112-03019 | T30R9C2 | T30R | MS3367-5-9 | 30 lbs | (135) | 5.9" | (150) | 1.38" | (35) | .14" | (3.5) | Natural | 100 |
| 111-03047 | T30R9M4 | T30R | MS3367-5-9 | 30 lbs | (135) | 5.9" | (150) | 1.38" | (35) | .14" | (3.5) | | 1000 |
| 111-00438 | T30R0C2 | T30R | * | 30 lbs | (135) | 5.9" | (150) | 1.38" | (35) | .14" | (3.5) | Black | 100 |
| 111-03034 | T30R0M4 | T30R | * | 30 lbs | (135) | 5.9" | (150) | 1.38" | (35) | .14" | (3.5) | | 1000 |
| T30L | | | | | | | | | | | | | |
| 111-03325 | T30L9C2 | T30L | - | 30 lbs | (135) | 7.48" | (190) | 1.97" | (50) | .14" | (3.5) | Natural | 100 |
| 111-03327 | T30L9M4 | T30L | - | 30 lbs | (135) | 7.48" | (190) | 1.97" | (50) | .14" | (3.5) | | 1000 |
| 111-03313 | T30L0C2 | T30L | - | 30 lbs | (135) | 7.48" | (190) | 1.97" | (50) | .14" | (3.5) | Black | 100 |
| 111-03315 | T30L0M4 | T30L | - | 30 lbs | (135) | 7.48" | (190) | 1.97" | (50) | .14" | (3.5) | | 1000 |
| T30LL | | | | | | | | | | | | | |
| 111-03515 | T30LL9C2 | T30LL | - | 30 lbs | (135) | 11.42" | (290) | 3.15" | (80) | .14" | (3.5) | Natural | 100 |
| 111-03517 | T30LL9M4 | T30LL | - | 30 lbs | (135) | 11.42" | (290) | 3.15" | (80) | .14" | (3.5) | | 1000 |
| 111-03501 | T30LL0C2 | T30LL | - | 30 lbs | (135) | 11.42" | (290) | 3.15" | (80) | .14" | (3.5) | Black | 100 |
| 111-03511 | T30LL0M4 | T30LL | - | 30 lbs | (135) | 11.42" | (290) | 3.15" | (80) | .14" | (3.5) | | 1000 |
| T30XL | | | | | | | | | | | | | |
| 111-02900 | T30XL9C2 | T30XL | MS3367-5-9 | 30 lbs | (135) | 14.37" | (365) | 4.13" | (105) | .14" | (3.5) | Natural | 100 |
| 111-02907 | T30XL9M4 | T30XL | MS3367-5-9 | 30 lbs | (135) | 14.37" | (365) | 4.13" | (105) | .14" | (3.5) | | 1000 |
| 111-02901 | T30XL0C2 | T30XL | * | 30 lbs | (135) | 14.37" | (365) | 4.13" | (105) | .14" | (3.5) | Black | 100 |
| 111-02903 | T30XL0M4 | T30XL | * | 30 lbs | (135) | 14.37" | (365) | 4.13" | (105) | .14" | (3.5) | | 1000 |

Installation tools - MK7, MK7HT, MK7P, MK9, MK9HT, MK9P. MK9 and MK9P cannot be used with T18S cable ties.

Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.

* Military black available. Contact HellermannTyton for more information.