

## T50I9C2

Cable Tie, 50 lb. 11.8" Max. Bun. Dia. 3.35" PA66, Natural, 100/pk

Article Number: 112-05219

Part Number: T50I9C2

Type: T50I

Material: PA66




### 1. Base Data

---

<b>Part No.</b>	T50I9C2
<b>Type</b>	T50I
<b>Color</b>	Natural
<b>Features</b>	HellermannTyton manufactures a full line of high quality cable ties in a variety of styles, sizes, materials, and colors. HellermannTyton cable ties are engineered and manufactured for maximum performance and quality.
<b>Application</b>	Used to bundle and secure wire and cable.
<b>Application Method</b>	Quick, simple application by hand or with HellermannTyton tensioning tools.

## 2. Product Dimensions


---

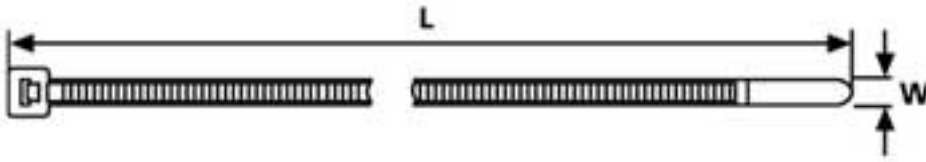

<b>Min. Tensile Strength</b>	50 lbs / 225 N
<b>Length (L)</b>	11.8 " / 300 mm
<b>Width (W)</b>	.18 " / 4.6 mm
<b>Min. Ø Bundle</b>	.06 " / 1.5 mm
<b>Max. Ø Bundle</b>	3.35 " / 85.0 mm

## 4. Material and Specifications

---

<b>Material</b>	Polyamide 6.6 (PA66)
<b>Material Shortcut</b>	PA66
<b>Flammability</b>	UL94 V2
<b>Operating Temperature</b>	-40 °F to +185 °F (-40 °C to +85 °C) continuous
<b>ROHS Conformity</b>	
<b>US Gov. Designation</b>	MS3367-7-9

## Logistic and Packaging

---

<b>Packaging Type</b>	bag
<b>Pkg. Qty.</b>	100 Bag
<b>Carton Qty.</b>	5000

<b>EAN code</b>	4031026108056
-----------------	---------------

<b>UPC</b>	08930608188
------------	-------------

**Miscellaneous**


---

<b>UL Listed (US and Canada)</b>	Yes
----------------------------------	-----

<b>UL Recognized (US and Canada)</b>	Yes
--------------------------------------	-----

## Standard Cable Ties T40 - T50 Series - Natural and Black

Material Data	
Material	<b>Polyamide 6.6 (PA66)</b>
Operating Temperature	<b>-40 °F to +185 °F (-40 °C to +85 °C) continuous</b>
Flammability	<b>UL94 V2</b>



Product Selection													
Article No.	Part No.	Type	US Gov. Designation	Min. Tensile Strength		Length (L)		Max. Ø Bundle		Width (W)	Color	Pkg. Qty.	
				lbs.	(N)	in.	(mm)	in.	(mm)	in.			(mm)
<b>T40R</b>													
112-04019	<b>T40R9C2</b>	T40R(U)	–	40 lbs	(180)	8.27"	(210)	2.16"	(55)	.16"	(4.0)	Natural	100
111-04131	<b>T40R9M4</b>	T40R(U)	–	40 lbs	(180)	8.27"	(210)	2.16"	(55)	.16"	(4.0)		1000
112-04060	<b>T40R0C2</b>	T40R(U)	–	40 lbs	(180)	8.27"	(210)	2.16"	(55)	.16"	(4.0)	Black	100
111-04122	<b>T40R0M4</b>	T40R(U)	–	40 lbs	(180)	8.27"	(210)	2.16"	(55)	.16"	(4.0)		1000
<b>T40I</b>													
111-04609	<b>T40I9C2</b>	T40I	–	40 lbs	(180)	11.42"	(290)	3.15"	(80)	.16"	(4.0)	Natural	100
111-04612	<b>T40I9M4</b>	T40I	–	40 lbs	(180)	11.42"	(290)	3.15"	(80)	.16"	(4.0)		1000
111-04600	<b>T40I0C2</b>	T40I	–	40 lbs	(180)	11.42"	(290)	3.15"	(80)	.16"	(4.0)	Black	100
111-04604	<b>T40I0M4</b>	T40I	–	40 lbs	(180)	11.42"	(290)	3.15"	(80)	.16"	(4.0)		1000
<b>T40L</b>													
111-04300	<b>T40L9C2</b>	T40L	–	40 lbs	(180)	14.4"	(365)	4.13"	(105)	.16"	(4.0)	Natural	100
111-04311	<b>T40L9M4</b>	T40L	–	40 lbs	(180)	14.4"	(365)	4.13"	(105)	.16"	(4.0)		1000
111-04301	<b>T40L0C2</b>	T40L	–	40 lbs	(180)	14.4"	(365)	4.13"	(105)	.16"	(4.0)	Black	100
111-04305	<b>T40L0M4</b>	T40L	–	40 lbs	(180)	14.4"	(365)	4.13"	(105)	.16"	(4.0)		1000
<b>T50S</b>													
111-05811	<b>T50S9C2</b>	T50S	–	50 lbs	(225)	5.9"	(150)	1.38"	(35)	.18"	(4.6)	Natural	100
111-05813	<b>T50S9M4</b>	T50S	–	50 lbs	(225)	5.9"	(150)	1.38"	(35)	.18"	(4.6)		1000
111-05806	<b>T50S0C2</b>	T50S	–	50 lbs	(225)	5.9"	(150)	1.38"	(35)	.18"	(4.6)	Black	100
111-05808	<b>T50S0M4</b>	T50S	–	50 lbs	(225)	5.9"	(150)	1.38"	(35)	.18"	(4.6)		1000
<b>T50R</b>													
112-05019	<b>T50R9C2</b>	T50R	MS3367-1-9	50 lbs	(225)	7.9"	(200)	1.97"	(50)	.18"	(4.6)	Natural	100
111-04862	<b>T50R9M4</b>	T50R	MS3367-1-9	50 lbs	(225)	7.9"	(200)	1.97"	(50)	.18"	(4.6)		1000
111-04878	<b>T50R0C2</b>	T50R	*	50 lbs	(225)	7.9"	(200)	1.97"	(50)	.18"	(4.6)	Black	100
111-04846	<b>T50R0M4</b>	T50R	*	50 lbs	(225)	7.9"	(200)	1.97"	(50)	.18"	(4.6)		1000
<b>T50I</b>													
112-05219	<b>T50I9C2</b>	T50I	MS3367-7-9	50 lbs	(225)	11.8"	(300)	3.35"	(85)	.18"	(4.6)	Natural	100
111-05230	<b>T50I9M4</b>	T50I	MS3367-7-9	50 lbs	(225)	11.8"	(300)	3.35"	(85)	.18"	(4.6)		1000
111-00444	<b>T50I0C2</b>	T50I	*	50 lbs	(225)	11.8"	(300)	3.35"	(85)	.18"	(4.6)	Black	100
111-05216	<b>T50I0M4</b>	T50I	*	50 lbs	(225)	11.8"	(300)	3.35"	(85)	.18"	(4.6)		1000
<b>T50L</b>													
112-05419	<b>T50L9C2</b>	T50L	MS3367-2-9	50 lbs	(225)	15.35"	(390)	4.33"	(110)	.18"	(4.6)	Natural	100
111-05449	<b>T50L9M4</b>	T50L	MS3367-2-9	50 lbs	(225)	15.35"	(390)	4.33"	(110)	.18"	(4.6)		1000
111-00445	<b>T50L0C2</b>	T50L	*	50 lbs	(225)	15.35"	(390)	4.33"	(110)	.18"	(4.6)	Black	100
111-00504	<b>T50L0M4</b>	T50L	*	50 lbs	(225)	15.35"	(390)	4.33"	(110)	.18"	(4.6)		1000

Installation tools - MK7, MK7HT, MK7P, MK9, MK9HT, MK9P. Dimensions are approximate and subject to technical changes.

Use **Part No.** for ordering and **Type** for specification purposes.

\* Military black available. Contact HellermannTyton for more information.