

T50R0HSM4

Cable Tie, 50lb. 7.9" Max. Bun. Dia. 1.97" PA66HS Black 1000/pk

Article Number: 111-04901

Part Number: T50R0HSM4

Type: T50R


Material: PA66HS



1. Base Data


Part No.	T50R0HSM4
Type	T50R
Color	Black (BK)
Features	HellermannTyton's heat stabilized cable ties provide excellent resistance when exposed to high heat applications.
Application	Used to bundle and secure wire and cable.
Application Method	Quick, simple application by hand or with HellermannTyton tensioning tools.

2. Product Dimensions

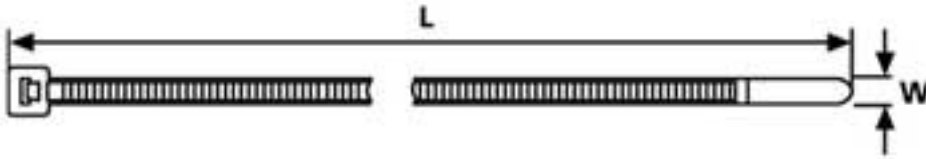

Min. Tensile Strength	50 lbs / 225 N
Length (L)	7.9 " / 200 mm
Width (W)	.18 " / 4.6 mm
Min. Ø Bundle	.06 " / 1.5 mm
Max. Ø Bundle	1.97 " / 50.0 mm

4. Material and Specifications

Material	Polyamide 6.6 heat stabilized (PA66HS)
Material Shortcut	PA66HS
Flammability	UL94 V2
Operating Temperature	-40 °F to +221 °F (-40 °C to +105 °C) continuous
ROHS Conformity	

Logistic and Packaging

Packaging Type	bag
Pkg. Qty.	1000
Carton Qty.	5000

EAN code	4031026274690
-----------------	---------------

UPC	08930608704
------------	-------------

Miscellaneous


UL Listed (US and Canada)	Yes
----------------------------------	-----

UL Recognized (US and Canada)	Yes
--------------------------------------	-----

Standard Cable Ties- Specialty Materials T18 - T120 Series - Heat Stabilized

HellermannTyton's heat stabilized cable ties provide excellent resistance when exposed to high heat applications.

Material Data	
Material	Polyamide 6.6 heat stabilized (PA66HS)
Operating Temperature	-40 °F to +221 °F (-40 °C to +105 °C) continuous
Flammability	UL94 V2



Product Selection		Type	Min. Tensile Strength		Length (L)		Max. Ø Bundle		Width (W)		Color	Pkg. Qty.
Article No.	Part No.		lbs.	(N)	in.	(mm)	in.	(mm)	in.	(mm)		
T18S												
111-02815	T18S0HSM4	T18S	18 lbs	(80)	3.27"	(83)	.63"	(16)	.09"	(2.3)	Black	1000
T18R												
111-01905	T18R0HSC2	T18R	18 lbs	(80)	4"	(100)	.87"	(22)	.10"	(2.5)	Black	100
111-00476	T18R0HSM4	T18R	18 lbs	(80)	4"	(100)	.87"	(22)	.10"	(2.5)	Black	1000
T18I												
111-02305	T18I0HSM4	T18I	18 lbs	(80)	5.5"	(140)	1.38"	(35)	.10"	(2.5)	Black	1000
T18L												
111-00403	T18L0HSC2	T18L	18 lbs	(80)	8.0"	(205)	2.17"	(55)	.10"	(2.5)	Black	100
111-00404	T18L0HSM4	T18L	18 lbs	(80)	8.0"	(205)	2.17"	(55)	.10"	(2.5)	Black	1000
T30R												
111-03067	T30R0HSC2	T30R	30 lbs	(135)	5.9"	(150)	1.38"	(35)	.14"	(3.5)	Black	100
111-03068	T30R0HSM4	T30R	30 lbs	(135)	5.9"	(150)	1.38"	(35)	.14"	(3.5)	Black	1000
T50R												
111-04900	T50R0HSC2	T50R	50 lbs	(225)	7.9"	(200)	1.97"	(50)	.18"	(4.6)	Black	100
111-04901	T50R0HSM4	T50R	50 lbs	(225)	7.9"	(200)	1.97"	(50)	.18"	(4.6)	Black	1000
T50I												
111-05248	T50I0HSC2	T50I	50 lbs	(225)	11.8"	(300)	3.35"	(85)	.18"	(4.6)	Black	100
111-05251	T50I0HSM4	T50I	50 lbs	(225)	11.8"	(300)	3.35"	(85)	.18"	(4.6)	Black	1000
T50L												
111-05470	T50L0HSC2	T50L	50 lbs	(225)	15.35"	(390)	4.33"	(110)	.18"	(4.6)	Black	100
111-05471	T50L0HSM4	T50L	50 lbs	(225)	15.35"	(390)	4.33"	(110)	.18"	(4.6)	Black	1000
T120R												
111-12061	T120R0HSK2	T120R	120 lbs	(535)	15.24"	(387)	4.13"	(105)	.30"	(7.6)	Black	50
111-12058	T120R0HSH4	T120R	120 lbs	(535)	15.24"	(387)	4.13"	(105)	.30"	(7.6)	Black	500

Installation tools - MK7, MK7HT, MK7P, MK9, MK9HT, MK9P. MK9, MK9HT, and MK9P tools cannot be used with T18S cable ties. Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.