

T50R6TZM4

Tefzel Cable Ties, 35lb. 8" Max. Bun. Dia 1.75" E/TFE, Blue, 1000/pk

Article Number: 111-04933

Part Number: T50R6TZM4

Type: T50R(U)

Material: E/TFE



1. Base Data

Part No. T50R6TZM4

Type T50R(U)


Color Blue

Features Tefzel ties provide excellent protection against radiation, ultraviolet light, and a wide range of chemicals. They are also rated for low outgassing applications.
HellermannTyton's Tefzel ties come in a standard color of blue for easy identification.

Application Used to bundle and secure wire and cable.

Application Method	Quick, simple application by hand or with HellermannTyton tensioning tools.
---------------------------	---

2. Product Dimensions

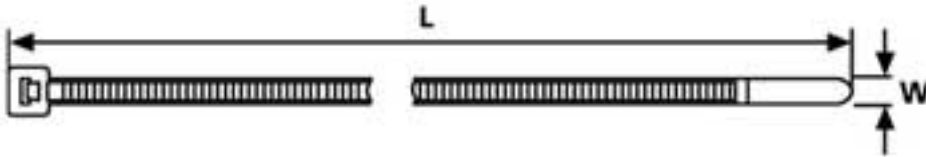

Min. Tensile Strength	35.5 lbs / 158 N
------------------------------	------------------

Length (L)	8 " / 200 mm
-------------------	--------------

Width (W)	.18 " / 4.6 mm
------------------	----------------

Min. Ø Bundle	.50 " / 3.0 mm
----------------------	----------------

Max. Ø Bundle	1.75 " / 50.0 mm
----------------------	------------------

4. Material and Specifications

Material	Ethylentetrafluorineethylene - Tefzel (E/TFE)
-----------------	---

Material Shortcut	E/TFE
--------------------------	-------

Flammability	UL94 V0
---------------------	---------

Operating Temperature	-112 °F to +302 °F (-80 °C to +150 °C)
------------------------------	--

ROHS Conformity	
------------------------	---

Logistic and Packaging

Packaging Type	bag
-----------------------	-----

Pkg. Qty.	1000
------------------	------

Carton Qty.


5000

UPC

08930608860

Tefzel® Cable Ties

Tefzel ties provide excellent protection against radiation, ultraviolet light, and a wide range of chemicals. They are also rated for low outgassing applications. HellermannTyton's Tefzel ties come in a standard color of blue for easy identification.



Material Data	
Material	Ethylentetrafluorethylene - Tefzel (E/TFE)
Operating Temperature	-112 °F to +302 °F (-80 °C to +150 °C) continuous
Flammability	UL94 V0




Product Selection

Article No.	Part No.	Type	Min. Tensile Strength		Length (L)		Max. Ø Bundle		Width (W)		Color	Pkg. Qty.
			lbs.	(N)	in.	(mm)	in.	(mm)	in.	(mm)		
111-01923	T18R6TZC2	T18R(U)	9.0 lbs	(40)	4"	(100)	.87"	(22)	.10"	(2.5)	Blue	100
111-01924	T18R6TZM4	T18R(U)	9.0 lbs	(40)	4"	(100)	.87"	(22)	.10"	(2.5)	Blue	1000
111-05026	T50R6TZC2	T50R(U)	35.5 lbs	(158)	8"	(200)	1.75"	(50)	.18"	(4.6)	Blue	100
111-04933	T50R6TZM4	T50R(U)	35.5 lbs	(158)	8"	(200)	1.75"	(50)	.18"	(4.6)	Blue	1000
111-12026	T120R6TZK2	T120R	70 lbs	(311)	15"	(380)	4.0"	(100)	.30"	(7.6)	Blue	50

Tefzel is a registered trademark of E.I. DuPont Corporation. Installation tools - MK7, MK7HT, MK7P, MK9, MK9HT, MK9P. Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.


Outside Serrated Cable Ties

The outside serrated cable ties are for specific applications where thin walled or soft insulation is used (such as in aircraft, trains, etc.) and for applications that are very sensitive to the amount of force applied to the cable.

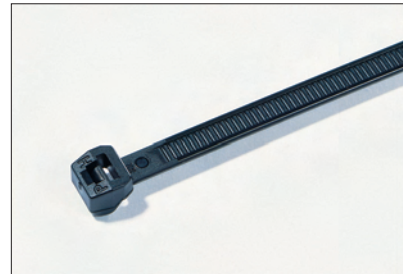

Outside serrated cable ties are also available in natural. Contact HellermannTyton for more information.

Material Data	
Material	Polyamide 6.6 heat stabilized (PA66HS)
Operating Temperature	-40 °F to +221 °F (-40 °C to +105 °C) continuous
Flammability	UL94 V2



Product Selection

Article No.	Part No.	Type	Min. Tensile Strength		Length (L)		Max. Ø Bundle		Width (W)		Color	Pkg. Qty.
			lbs.	(N)	in.	(mm)	in.	(mm)	in.	(mm)		
118-04700	118-04700	T18ROS	18 lbs	(80)	3.94"	(100)	.79"	(20)	.10"	(2.5)	Black	100
118-04800	118-04800	T30ROS	30 lbs	(135)	5.71"	(145)	1.34"	(35)	.13"	(3.4)	Black	100
118-04900	118-04900	T30LOS	30 lbs	(135)	7.87"	(200)	2.0"	(50)	.13"	(3.4)	Black	100
118-05850	118-05850	T50SOS	50 lbs	(225)	5.9"	(150)	1.38"	(35)	.18"	(4.6)	Black	100
118-05050	118-05050	T50ROS	50 lbs	(225)	8"	(200)	1.95"	(50)	.18"	(4.6)	Black	100
118-05900	118-05900	T50LOS	50 lbs	(225)	15"	(384)	4.29"	(110)	.18"	(4.6)	Black	100

Installation tools - MK7, MK7HT, MK7P, MK9, MK9HT, MK9P. Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.