

## T50R9C2

Cable Tie, 50 lb. 7.9" Max. Bun. Dia. 1.97", PA66, Natural, 100/pk

Article Number: 112-05019

Part Number: T50R9C2

Type: T50R

Material: PA66



### 1. Base Data

---

**Part No.** T50R9C2

**Type** T50R

**Color** Natural

**Features** HellermannTyton manufactures a full line of high quality cable ties in a variety of styles, sizes, materials, and colors. HellermannTyton cable ties are engineered and manufactured for maximum performance and quality.


**Application** Used to bundle and secure wire and cable.

**Application Method**

Quick, simple application by hand or with HellermannTyton tensioning tools.

## 2. Product Dimensions

---

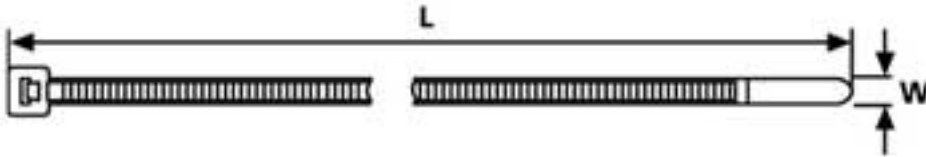**Min. Tensile Strength**

50 lbs / 225 N

**Length (L)**

7.9 " / 200 mm

**Width (W)**

.18 " / 4.6 mm

**Min. Ø Bundle**

.06 " / 1.5 mm

**Max. Ø Bundle**

1.97 " / 50.0 mm

## 4. Material and Specifications

---

**Material**

Polyamide 6.6 (PA66)

**Material Shortcut**

PA66

**Flammability**

UL94 V2

**Operating Temperature**

-40 °F to +185 °F (-40 °C to +85 °C)  
continuous

**ROHS Conformity****US Gov. Designation**

MS3367-1-9

## Logistic and Packaging

---

<b>Packaging Type</b>	bag
<b>Pkg. Qty.</b>	100
<b>Carton Qty.</b>	5000
<b>EAN code</b>	4031026108032
<b>UPC</b>	08930608893

### **Miscellaneous**


---

<b>UL Listed (US and Canada)</b>	Yes
<b>UL Recognized (US and Canada)</b>	Yes

## Standard Cable Ties

### T40 - T50 Series - Natural and Black

Material Data	
Material	Polyamide 6.6 (PA66)
Operating Temperature	-40 °F to +185 °F (-40 °C to +85 °C) continuous
Flammability	UL94 V2



File# E64139



File# E64139

Product Selection

Article No.	Part No.	Type	US Gov. Designation	Min. Tensile Strength		Length (L)		Max. Ø Bundle		Width (W)		Color	Pkg. Qty.
				lbs.	(N)	in.	(mm)	in.	(mm)	in.	(mm)		
<b>T40R</b>													
112-04019	<b>T40R9C2</b>	T40R(U)	–	40 lbs	(180)	8.27"	(210)	2.16"	(55)	.16"	(4.0)	Natural	100
111-04131	<b>T40R9M4</b>	T40R(U)	–	40 lbs	(180)	8.27"	(210)	2.16"	(55)	.16"	(4.0)		1000
112-04060	<b>T40R0C2</b>	T40R(U)	–	40 lbs	(180)	8.27"	(210)	2.16"	(55)	.16"	(4.0)	Black	100
111-04122	<b>T40R0M4</b>	T40R(U)	–	40 lbs	(180)	8.27"	(210)	2.16"	(55)	.16"	(4.0)		1000
<b>T40I</b>													
111-04609	<b>T40I9C2</b>	T40I	–	40 lbs	(180)	11.42"	(290)	3.15"	(80)	.16"	(4.0)	Natural	100
111-04612	<b>T40I9M4</b>	T40I	–	40 lbs	(180)	11.42"	(290)	3.15"	(80)	.16"	(4.0)		1000
111-04600	<b>T40I0C2</b>	T40I	–	40 lbs	(180)	11.42"	(290)	3.15"	(80)	.16"	(4.0)	Black	100
111-04604	<b>T40I0M4</b>	T40I	–	40 lbs	(180)	11.42"	(290)	3.15"	(80)	.16"	(4.0)		1000
<b>T40L</b>													
111-04300	<b>T40L9C2</b>	T40L	–	40 lbs	(180)	14.4"	(365)	4.13"	(105)	.16"	(4.0)	Natural	100
111-04311	<b>T40L9M4</b>	T40L	–	40 lbs	(180)	14.4"	(365)	4.13"	(105)	.16"	(4.0)		1000
111-04301	<b>T40L0C2</b>	T40L	–	40 lbs	(180)	14.4"	(365)	4.13"	(105)	.16"	(4.0)	Black	100
111-04305	<b>T40L0M4</b>	T40L	–	40 lbs	(180)	14.4"	(365)	4.13"	(105)	.16"	(4.0)		1000
<b>T50S</b>													
111-05811	<b>T50S9C2</b>	T50S	–	50 lbs	(225)	5.9"	(150)	1.38"	(35)	.18"	(4.6)	Natural	100
111-05813	<b>T50S9M4</b>	T50S	–	50 lbs	(225)	5.9"	(150)	1.38"	(35)	.18"	(4.6)		1000
111-05806	<b>T50S0C2</b>	T50S	–	50 lbs	(225)	5.9"	(150)	1.38"	(35)	.18"	(4.6)	Black	100
111-05808	<b>T50S0M4</b>	T50S	–	50 lbs	(225)	5.9"	(150)	1.38"	(35)	.18"	(4.6)		1000
<b>T50R</b>													
112-05019	<b>T50R9C2</b>	T50R	MS3367-1-9	50 lbs	(225)	7.9"	(200)	1.97"	(50)	.18"	(4.6)	Natural	100
111-04862	<b>T50R9M4</b>	T50R	MS3367-1-9	50 lbs	(225)	7.9"	(200)	1.97"	(50)	.18"	(4.6)		1000
111-04878	<b>T50R0C2</b>	T50R	*	50 lbs	(225)	7.9"	(200)	1.97"	(50)	.18"	(4.6)	Black	100
111-04846	<b>T50R0M4</b>	T50R	*	50 lbs	(225)	7.9"	(200)	1.97"	(50)	.18"	(4.6)		1000
<b>T50I</b>													
112-05219	<b>T50I9C2</b>	T50I	MS3367-7-9	50 lbs	(225)	11.8"	(300)	3.35"	(85)	.18"	(4.6)	Natural	100
111-05230	<b>T50I9M4</b>	T50I	MS3367-7-9	50 lbs	(225)	11.8"	(300)	3.35"	(85)	.18"	(4.6)		1000
111-00444	<b>T50I0C2</b>	T50I	*	50 lbs	(225)	11.8"	(300)	3.35"	(85)	.18"	(4.6)	Black	100
111-05216	<b>T50I0M4</b>	T50I	*	50 lbs	(225)	11.8"	(300)	3.35"	(85)	.18"	(4.6)		1000
<b>T50L</b>													
112-05419	<b>T50L9C2</b>	T50L	MS3367-2-9	50 lbs	(225)	15.35"	(390)	4.33"	(110)	.18"	(4.6)	Natural	100
111-05449	<b>T50L9M4</b>	T50L	MS3367-2-9	50 lbs	(225)	15.35"	(390)	4.33"	(110)	.18"	(4.6)		1000
111-00445	<b>T50L0C2</b>	T50L	*	50 lbs	(225)	15.35"	(390)	4.33"	(110)	.18"	(4.6)	Black	100
111-00504	<b>T50L0M4</b>	T50L	*	50 lbs	(225)	15.35"	(390)	4.33"	(110)	.18"	(4.6)		1000

Installation tools - MK7, MK7HT, MK7P, MK9, MK9HT, MK9P. Dimensions are approximate and subject to technical changes.

Use **Part No.** for ordering and **Type** for specification purposes.

\* Military black available. Contact HellermannTyton for more information.