

T50RSF9C2

Arrowhead Push Mount Tie 50lb. 8.27" Mnt Hole Dia .25"-.28" Pan Thick .04"-.14" PA66

Natural 100/pk

Article Number: 111-85789

Part Number: T50RSF9C2

Type: T50RSF(U)


Material: PA66



1. Base Data

Part No.	T50RSF9C2
Type	T50RSF(U)
Color	Natural
Features	One-piece, all plastic ties for quick, simple cable mounting.
Application	The arrowhead designs allows these ties to be used in areas with limited space.

2. Product Dimensions

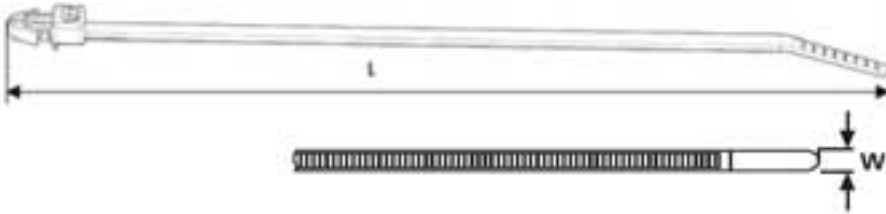

Min. Tensile Strength	50 lbs / 225 N
Length (L)	8.27 " / 210 mm
Width (W)	.19 " / 4.7 mm
Height (H)	.30 " / 7.5 mm
Min. Ø Bundle	.06 " / 1.6 mm
Max. Ø Bundle	1.73 " / 44.0 mm
Max. Panel Thickness	.14 " / 3.56
Min. Panel Thickness	.04 " / 1.0
Mounting Hole Ø	6.4-7.1
Min. Mounting Hole Ø	.25 "
Max. Mounting Hole Ø	.28 "

4. Material and Specifications

Material	Polyamide 6.6 (PA66)
Material Shortcut	PA66
Flammability	UL94 V2
Operating Temperature	-40 °F to +185 °F (-40 °C to +85 °C) continuous

ROHS Conformity



Logistic and Packaging

Packaging Type	bag
Pkg. Qty.	100
Carton Qty.	1 Pieces
EAN code	4031026107509
UPC	08930609031

Miscellaneous

UL Recognized (US and Canada) Yes

Cable Ties

Push Mount Ties

One-piece, all plastic ties for quick, simple cable mounting.



Material Data	
Material	Polyamide 6.6 (PA66)
Operating Temperature	-40 °F to +185 °F (-40 °C to +85 °C) continuous
Flammability	UL94 V2



c **FA** **US**
File# E64139

Product Selection											
Article No.	Part No.	Type	Min. Tensile Strength		Mounting Hole Ø	Panel Thickness	Length (L)	Max. Ø Bundle	Width (W)	Color	Pkg. Qty.
			lbs.	(N)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)		
T30RSF											
111-85603	T30RSF9C2	T30RSF(U)	30 lbs	(135)	.19" - .22" (4.76-5.59)	.04" - .09" (0.9-2.36)	6.34" (161)	1.25" (31.8)	.14" (3.6)	Natural	100
126-00704	T30RSF9M4	T30RSF(U)	30 lbs	(135)	.19" - .22" (4.76-5.59)	.04" - .09" (0.9-2.36)	6.34" (161)	1.25" (31.8)	.14" (3.6)	Natural	1000
126-00700	T30RSF0C2	T30RSF(U)	30 lbs	(135)	.19" - .22" (4.76-5.59)	.04" - .09" (0.9-2.36)	6.34" (161)	1.25" (31.8)	.14" (3.6)	Black	100
126-00702	T30RSF0M4	T30RSF(U)	30 lbs	(135)	.19" - .22" (4.76-5.59)	.04" - .09" (0.9-2.36)	6.34" (161)	1.25" (31.8)	.14" (3.6)	Black	1000
T50SSF											
126-00043	126-00043	T50SSF	50 lbs	(225)	.25" - .28" (6.4-7.1)	.04" - .14" (1.0-3.56)	6.26" (159)	1.38" (35)	.19" (4.7)	Natural	100
126-00044	126-00044	T50SSF	50 lbs	(225)	.25" - .28" (6.4-7.1)	.04" - .14" (1.0-3.56)	6.26" (159)	1.38" (35)	.19" (4.7)	Natural	1000
126-00045	126-00045	T50SSF	50 lbs	(225)	.25" - .28" (6.4-7.1)	.04" - .14" (1.0-3.56)	6.26" (159)	1.38" (35)	.19" (4.7)	Black	100
126-00046	126-00046	T50SSF	50 lbs	(225)	.25" - .28" (6.4-7.1)	.04" - .14" (1.0-3.56)	6.26" (159)	1.38" (35)	.19" (4.7)	Black	1000
T50RSF											
111-85789	T50RSF9C2	T50RSF(U)	50 lbs	(225)	.25" - .28" (6.4-7.1)	.04" - .14" (1.0-3.56)	8.27" (210)	1.73" (44)	.19" (4.7)	Natural	100
126-01011	T50RSF9M4	T50RSF(U)	50 lbs	(225)	.25" - .28" (6.4-7.1)	.04" - .14" (1.0-3.56)	8.27" (210)	1.73" (44)	.19" (4.7)	Natural	1000
126-01003	T50RSF0C2	T50RSF(U)	50 lbs	(225)	.25" - .28" (6.4-7.1)	.04" - .14" (1.0-3.56)	8.27" (210)	1.73" (44)	.19" (4.7)	Black	100
126-01004	T50RSF0M4	T50RSF(U)	50 lbs	(225)	.25" - .28" (6.4-7.1)	.04" - .14" (1.0-3.56)	8.27" (210)	1.73" (44)	.19" (4.7)	Black	1000

Installation tools - MK7, MK7HT, MK7P, MK9, MK9HT, MK9P. Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.