

T50RTM250HSM4

FirTreePsh Mnt 50lb Length 8.27" Pnl Thick .052"-.28" Mnt Hole Dia .25"-.26" Black

PA66HS 1000/pk

Article Number: 126-03501

Part Number: T50RTM250HSM4

Type: T50RTM25


Material: PA66HS



1. Base Data


Part No.	T50RTM250HSM4
Type	T50RTM25
Color	Black (BK)
Features	Fir tree design grips to the inside of a hole. They can be used on sheet metal, wood, and cast iron.

2. Product Dimensions

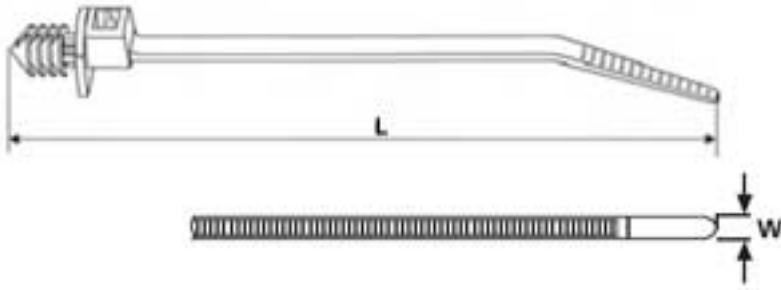

Min. Tensile Strength	50 lbs / 225 N
Length (L)	8.27 " / 210 mm
Width (W)	.19 " / 4.7 mm
Min. Ø Bundle	.060 " / 1.5 mm
Max. Ø Bundle	1.97 " / 50.0 mm
Max. Panel Thickness	.28 " / 7.0
Min. Panel Thickness	.052 " / 1.32
Min. Mounting Hole Ø	.25 "
Max. Mounting Hole Ø	.26 " / 6.6 mm
Min. Mounting Hole Ø	6.5 mm

4. Material and Specifications

Material	Polyamide 6.6 heat stabilized (PA66HS)
Material Shortcut	PA66HS
Operating Temperature	-40 °F to +221 °F (-40 °C to +105 °C) continuous
ROHS Conformity	

Logistic and Packaging


Packaging Type	bag
-----------------------	-----

Pkg. Qty.	1000
Carton Qty.	5000
UPC	08930614543

Cable Ties

Fir Tree Push Mount Ties

Fir tree design grips to the inside of a hole. They can be used on sheet metal, wood, and cast iron. Type T50RTM25E has a longer fir tree for larger panel thicknesses.

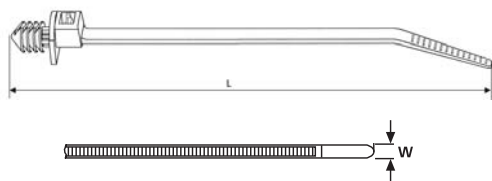

Material Data	
Material	Polyamide 6.6 heat stabilized (PA66HS)
Operating Temperature	-40 °F to +221 °F (-40 °C to +105 °C) continuous
Flammability	UL94 V2




Product Selection			Min. Tensile Strength	Mounting Hole Ø	Panel Thickness	Length (L)	Max. Ø Bundle	Width (W)	Color	Pkg. Qty.
Article No.	Part No.	Type								
126-03501	T50RTM250HSM4	T50RTM25	50 lbs (225)	.25" - .26" (6.5 - 6.6)	.052" - .28" (1.32 - 7.0)	8.27" (210)	1.97" (50.0)	.19" (4.7)	Black	1000
157-01400	T50RTM25E8HSM4	T50RTM25E	50 lbs (225)	.25" - .26" (6.5 - 6.6)	.09" - .55" (2.3 - 13.94)	8.43" (214)	1.97" (50.0)	.19" (4.7)	Gray	1000

Installation tools - MK7, MK7HT, MK7P, MK9, MK9HT, MK9P. Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.

Fir Tree Mount with Disc Tie

This fir tree mount tie provides a low insertion force with a high extraction force. The outside serrations present a smooth surface to the cables preventing damage to the insulation. The unique head design allows the cable tie to firmly hold bundles as small as .06" diameter and the disc offers added water protection.

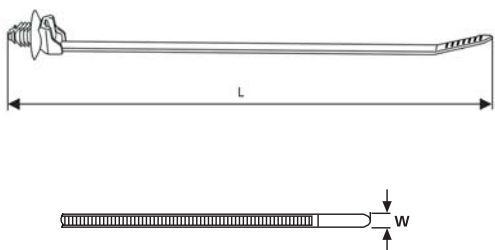

Material Data	
Material	Polyamide 6.6 high impact modified, heat stabilized (PA66HIRHS)
Operating Temperature	-40 °F to +230 °F (-40 °C to +110 °C) continuous
Flammability	UL94 HB



Product Selection			Min. Tensile Strength	Mounting Hole Ø	Panel Thickness	Length (L)	Max. Ø Bundle	Width (W)	Color	Pkg. Qty.
Article No.	Part No.	Type								
155-05800	155-05800	T50SOSFT6E	50 lbs (225)	.26" - .28" (6.5-7.0)	.03" - .12" (0.75 - 3.0)	6.30" (160)	1.38" (35)	.18" (4.6)	Black	500

Installation tools - MK7, MK7HT, MK7P, MK9, MK9HT, MK9P. Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.