


## Miscellaneous Labels

### WIC® Markers

WIC® markers permanently and rapidly mark wires. Now, it's simple to change identification on wires which are already marked. This range of clip-on markers is specially designed for use after wire termination has been completed. The unique gripping profile is designed to ensure that clip remains in place under normal and vibration working conditions.

The deeply stamped mark, black print on yellow provide high legibility. The interlocking device ensures perfect alignment of multi-mark legends. A high grade of material guarantees good mechanical properties and chemical resistance against cleaning agents, oils and fuels. Only 3 sizes of markers are needed for identifying wire cross-sections ranging from an outside cable diameter of .75" - .208" (2.0 to 5.3mm).

WIC is an "open marker", open markers can be applied to pre-terminated wire and cable. Use the re-fillable applicator to easily apply and position the markers during installation.

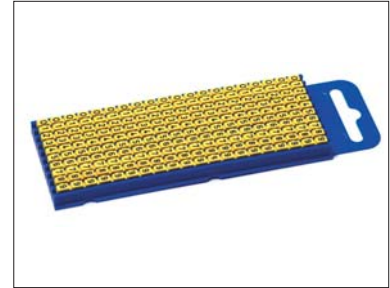


The convenient WIC dispenser ideal for pocket or toolbox storage.

#### Packaging

The pocket size dispensers of 200 markers (W1 and W2) and 100 markers (W3) adapted for use on site and easy stored. Customized compositions or special characters on request.

WIC Markers	Yes	No
Refillable Applicator	•	
Wire Grips	•	
Color Coded Applicators		•

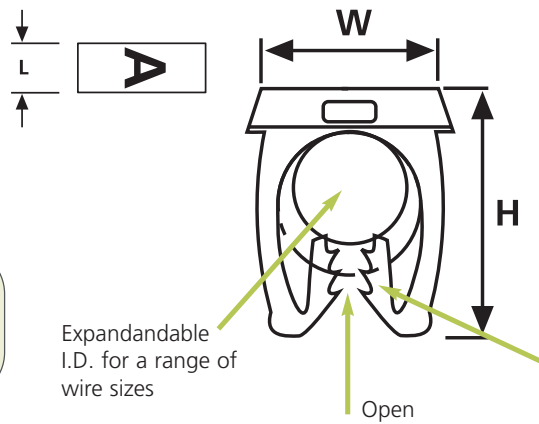

WIC is an "open marker". Open markers can be applied to pre-terminated wire and cable. Use the re-fillable applicator to easily apply and position the markers during installation.

Wire grips to secure the markers to the wire

Product Data	W1	W2	W3
<b>Label Material</b>			
<b>Material</b>	Polyamide 6	Polyamide 6	Polyamide 6
<b>Color</b>	Yellow/ Black Print	Yellow/ Black Print	Yellow/ Black Print
<b>Temperature Range</b>	-40°F to +185°F, intermittent 221°F (-40°C to +85°C, intermittent 105°C)	-40°F to +185°F, intermittent 221°F (-40°C to +85°C, intermittent 105°C)	-40°F to +185°F, intermittent 221°F (-40°C to +85°C, intermittent 105°C)
<b>Flammability</b>	Self-extinguishing UL94VO - base material	Self-extinguishing UL94VO - base material	Self-extinguishing UL94VO - base material
<b>Approvals</b>	ICE 304, EN 60062, UL94	ICE 304, EN 60062, UL94	ICE 304, EN 60062, UL94
<b>Cable Range - in. (mm)</b>	2.0" - 2.8" (50.8 - 71.12)	2.8" to 3.8" (71.12 - 96.52)	4.3" to 5.3" (109.22 - 134.62)
<b>Nominal Wire Cross Section - in. (mm)</b>	0.5" to 1.5" (12.7 - 38.1)	1.5" to 2.5" (38.1 - 63.5)	4" to 6" (101.6 - 152.4)
<b>AWG</b>	20 to 18	16 to 14	10 to 8
<b>Width (W) - in. (mm)</b>	.19" (5)	.22" (5.6)	.31" (8.0)
<b>Height (H) - in. (mm)</b>	.25" (6.4)	.28" (7.1)	.38" (9.6)
<b>Length (L) - in. (mm)</b>	.12" (3.0)	.12" (3.0)	.12" (3.0)
<b>Markers per Strip</b>	20	20	10
<b>Package Quantity</b>	200	200	100

WIC® Markers *continued*

Product Selection					
Wire Size	Legend	Article No.	Part No.	Type	Pkg. Qty.
20-18 Gauge Wire - Wire O.D. in. (mm) .075" - 0.110" (2-2.8)	0	561-01604	<b>561-01604</b>	WIC1-0	200
	1	561-01614	<b>561-01614</b>	WIC1-1	200
	2	561-01624	<b>561-01624</b>	WIC1-2	200
	3	561-01634	<b>561-01634</b>	WIC1-3	200
	4	561-01644	<b>561-01644</b>	WIC1-4	200
	5	561-01654	<b>561-01654</b>	WIC1-5	200
	6	561-01664	<b>561-01664</b>	WIC1-6	200
	7	561-01674	<b>561-01674</b>	WIC1-7	200
	8	561-01684	<b>561-01684</b>	WIC1-8	200
	9	561-01694	<b>561-01694</b>	WIC1-9	200
16 -14 Gauge Wire - Wire O.D. in. (mm) .110" - 0.149" (2.8-3.8)	0	561-02604	<b>561-02604</b>	WIC2-0	200
	1	561-02614	<b>561-02614</b>	WIC2-1	200
	2	561-02624	<b>561-02624</b>	WIC2-2	200
	3	561-02634	<b>561-02634</b>	WIC2-3	200
	4	561-02644	<b>561-02644</b>	WIC2-4	200
	5	561-02654	<b>561-02654</b>	WIC2-5	200
	6	561-02664	<b>561-02664</b>	WIC2-6	200
	7	561-02674	<b>561-02674</b>	WIC2-7	200
	8	561-02684	<b>561-02684</b>	WIC2-8	200
	9	561-02694	<b>561-02694</b>	WIC2-9	200
10-8 Gauge Wire - Wire O.D. in. (mm) .169" - 0.208" (4.3-5.3)	0	561-03604	<b>561-03604</b>	WIC3-0	100
	1	561-03614	<b>561-03614</b>	WIC3-1	100
	2	561-03624	<b>561-03624</b>	WIC3-2	100
	3	561-03634	<b>561-03634</b>	WIC3-3	100
	4	561-03644	<b>561-03644</b>	WIC3-4	100
	5	561-03654	<b>561-03654</b>	WIC3-5	100
	6	561-03664	<b>561-03664</b>	WIC3-6	100
	7	561-03674	<b>561-03674</b>	WIC3-7	100
	8	561-03684	<b>561-03684</b>	WIC3-8	100
	9	561-03694	<b>561-03694</b>	WIC3-9	100

Use **Part No.** for ordering and **Type** for specification purposes.

WIC Markers are also available in A-Z upon request, please contact HellermannTyton for details.

## WICTOOL Applicator

WICTOOL easily applies WIC markers to wire. The unique design of curved head and push out system makes this applicator very easy to use and perfectly adapted to WIC markers. WICTOOL must be ordered separate from WIC markers.

Product Selection			
Article No.	Part No.	Type	Pkg. Qty.
561-00001	<b>561-00001</b>	WIC TOOL	5

