Hirschmann Automation and Control GmbH






BAT-ANT-N-23/9A

Industrial Networking:Industrial Ethernet:Wireless LAN:Accessories:Antenna

Delivery informations	
Availability	available
Document created at	22.05.2009
Product description	
Description	directional Antenna linear for 5.8 GHz
Туре	BAT-ANT-N-23/9A
Order No.	943 903-340
Cable length	1 m
Cable specification	2 N male connectors; 1.0 dB at 5 GHz
Radio technology	
Frequency band	5150 MHz - 5850 MHz
Polarisation	linear
Elevation, Azimuth	90 / 90
VSWR	2.0: 1 Max.
Gain	23 dBi
Antenna connector	N female
Drawing	

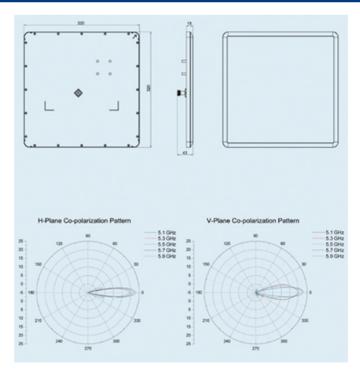

Ambient conditions		
Operating temperature	-40 °C to +80 °C	
Storage/transport temperature	-40 °C to +80 °C	

Wind load	216 km/h
Mechanical construction	
Dimensions (W x H x D)	320 mm x 320 mm x 18 mm
Mounting	wall, mast
Protection class	IP65
Material	ABS, UV resistant
Weight	1.2 kg
Scope of delivery and accessories	
Scope of delivery	antenna, cable 1 m, pigtail RP-SMA to N, installation material, sealing tape