


HONEYWELL  
PART NUMBER  
192-303KET-A02

REV	DOCUMENT	CHANGED BY	CHECK
B	0039479	SS 05MAY08	BLR

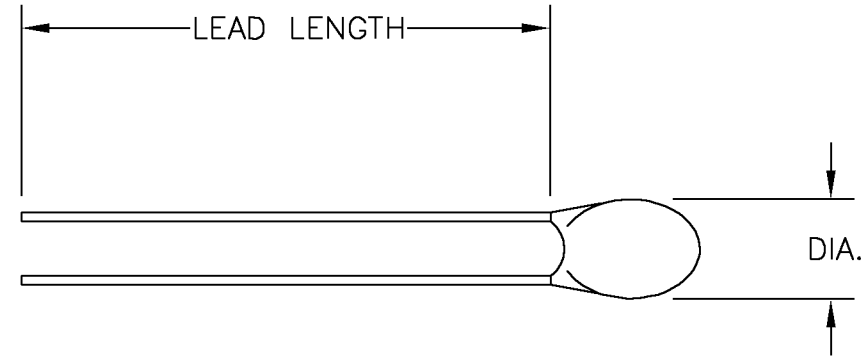

CHIP 091-303KET-001

DIAMETER .075 MAX

LEAD LENGTH 1 1/2 MIN

LEAD 900-032U1A-BBP WIRE  
32 AWG TIN COATED COPPER ALLOY 180

SOLDER 900-740S17-A01  
TIN 96% SILVER 4%

FLUX ORGANIC, WATER SOLUBLE

COATING 908-5EPMIX-A60 (BLACK EPOXY)

AGE 5 DAYS AT 105°C, 5 DAYS AT 50°C

RESISTANCE	TEMP. (°C)	MINIMUM (OHMS)	NOMINAL (OHMS)	MAXIMUM (OHMS)	REF. TOL.
	70	5312.9	5349	5385.4	±0.2°C
	0	94,545	95,490	96,445	±0.2°C

NOTE:  
1. RoHS COMPLIANT

DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: FRACTIONS X ± 1/64 ONE PLACE .X ± - TWO PLACE .XX ± 0.01 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± - ANGLES X ± 0°30'	DRAWN	HW	27OCT00	<b>Honeywell</b>			
	CHECK	JF	27OCT00				THERMISTOR OUTLINE
THIRD ANGLE PROJECTION 				THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			
INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				SIZE	TYPE	DRAWING NAME	REV
AUTO CAD 2D				B	I	192-303KET-A02	B
SCALE -						SHEET	1 OF 1