

MICRO SWITCH

FREERPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

IISM701-H58

IISM701-H58

M

DRAWING NUMBER

7

ISSUE

REPLACES

RELEASE NO. PR-2974

CHECK

REVISIONS

A	C030495	DBW	10 MAY 72
B	PR-2974	RER	13 NOV 72
C	C037565	CEB	7 SEPT 76
D	C063767	JAP	17 NOV 88
E	C080136	JAK	20 FEB 95
F	CO-82803-E	DLT	13 JAN 97

10 JUN 70

10 JUN 70

10 JUN 70

10 JUN 70

10 JUN 70

10 JUN 70

10 JUN 70

10 JUN 70

10 JUN 70

10 JUN 70

10 JUN 70

10 JUN 70

10 JUN 70



10 JUN 70

10 JUN 70

10 JUN 70

10 JUN 70

10 JUN 70

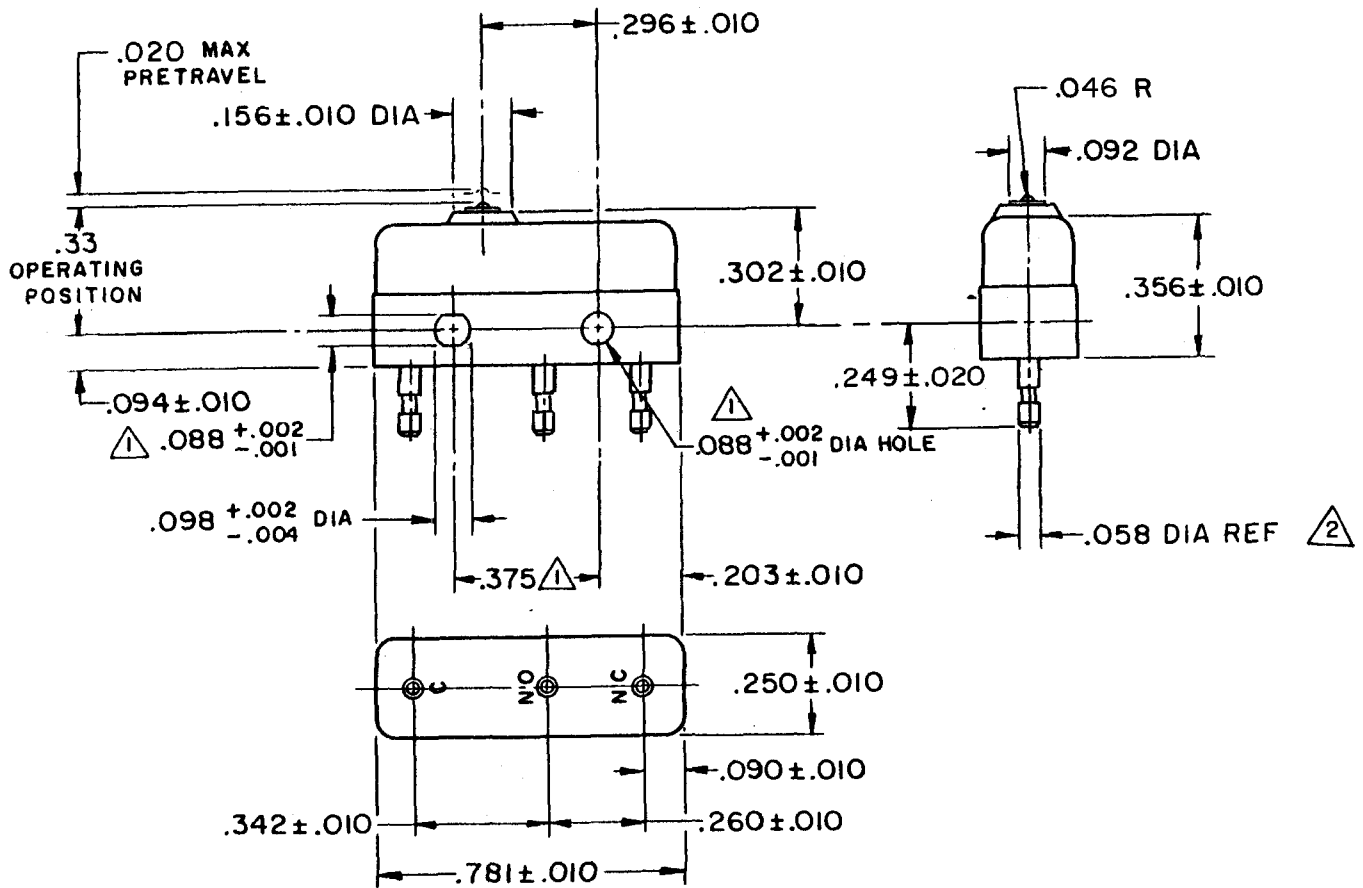

NOTE -
 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS
 2 PLATED TERMINALS WILL ACCEPT "AMP INC".058 DIA PIN RECEPTACLES.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	
OPERATING FORCE	--- 56 GRAM MAX
RELEASE FORCE	--- 14 GRAM MIN
DIFFERENTIAL TRAVEL	--- .002 MAX
OVERTRAVEL	--- .005 MIN

ELECTRICAL DATA	
CONTACT ARRANGEMENT S P D T	
30 VOLTS DC RATING	
INDUCTIVE	--- SEA LEVEL --- 3 AMP
	50,000 FT --- 2.5 AMP
RESISTIVE	--- SEA LEVEL --- 5 AMP
	50,000 FT --- 5 AMP
MAXIMUM INRUSH	--- 24 AMP

SCALE 2 TO 1		
DO NOT SCALE PRINT		
UNLESS OTHERWISE NOTED		
DIMENSIONS ARE IN INCHES		
TOLERANCES ARE:		
ONE PLACE	(.0)	± .030
TWO PLACE	(.00)	± .015
THREE PLACE	(.000)	± .005
ANGLES		±
WEIGHT .006 LB MAX		

UNDERWRITERS' LAB. INC. LISTED RATING
 4A-250 VAC



FORMTEK

DRAWN

CHECK

10 JUN 70

10 JUN 70

10 JUN 70

10 JUN 70

10 JUN 70

10 JUN 70

10 JUN 70

10 JUN 70

10 JUN 70

10 JUN 70