

924CE2-S3

M

DRAWING NUMBER

ISSUE X2

CHECK

REVISIONS

A C069061

LJF

15 APR 91

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK


CHECK

CHECK


CHECK

CHECK

RELEASE NO. PR-14729 REPLACES

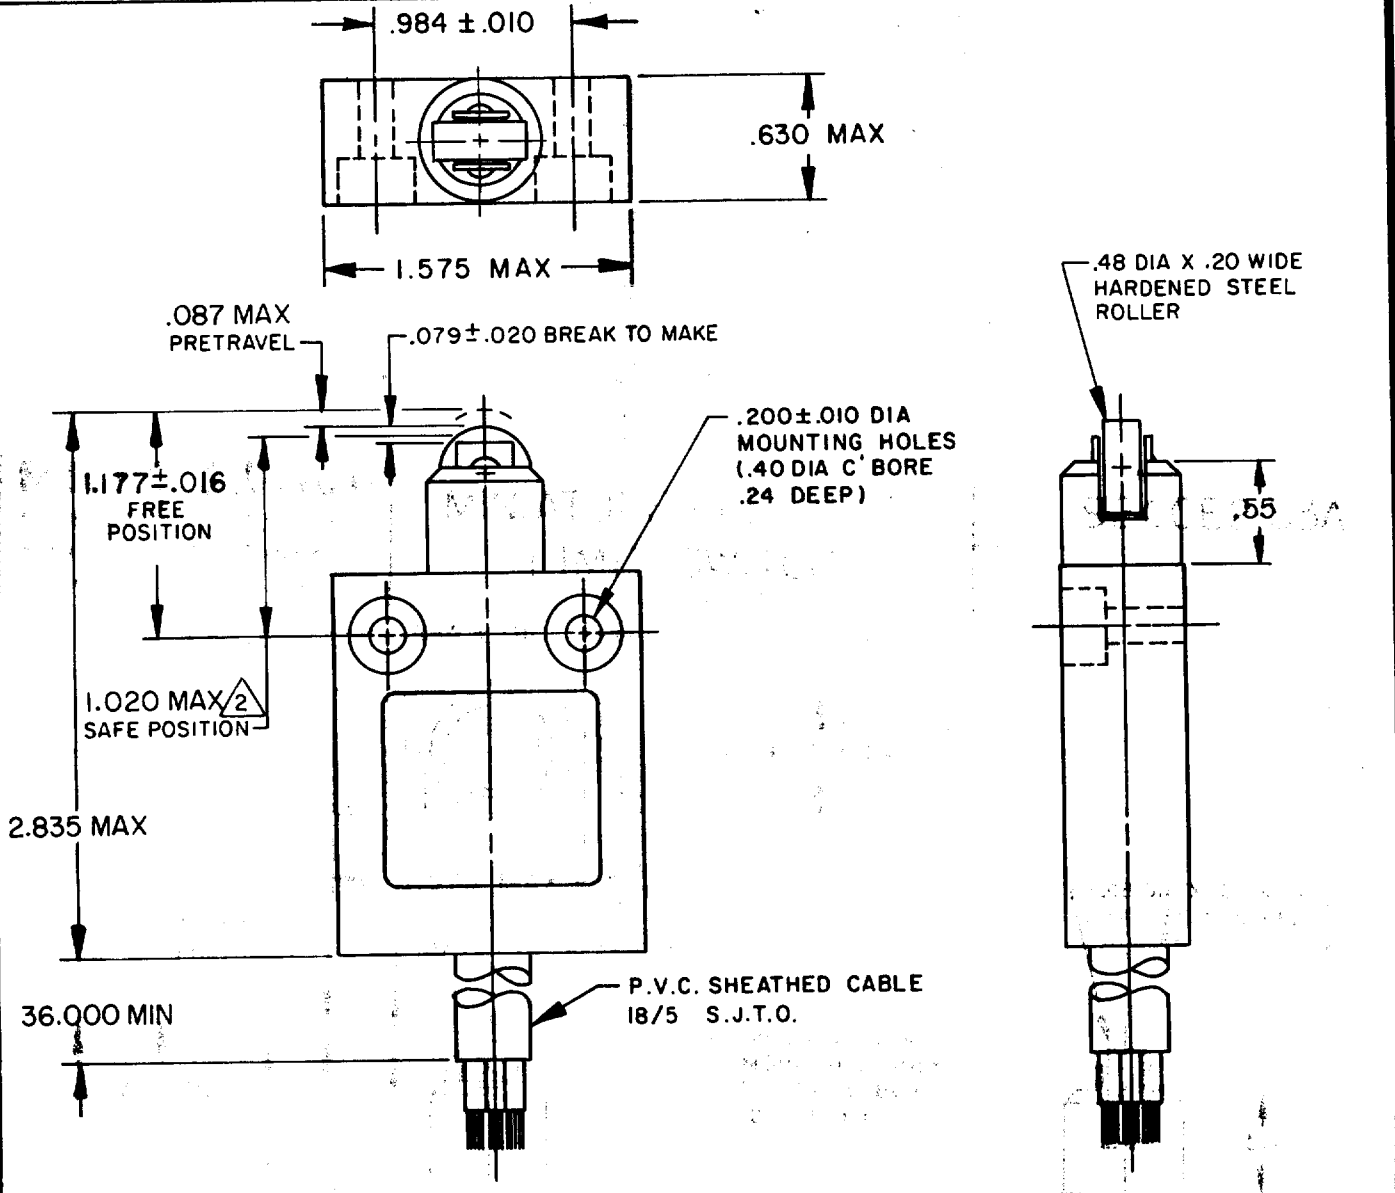


- NOTES**
- 1 - ZINC HOUSING FINISHED WITH GRAY PAINT
  - 2 THE MINIMUM PLUNGER TRAVEL PAST BREAK, FOR A SAFE CONTACT GAP IS .060
  - 3 - SWITCH PROVIDES BREAK BEFORE MAKE CIRCUITRY

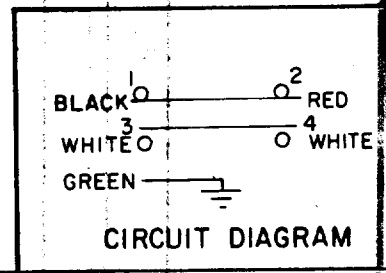

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

<b>CHARACTERISTICS</b>	<b>ELECTRICAL DATA</b>	SCALE FULL																									
		DO NOT SCALE PRINT																									
OPERATING FORCE ----- 5.1 LB MAX	CONTACT ARRANGEMENT S P D T D B	<b>TOLERANCES</b> APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ± <table border="1"> <thead> <tr> <th></th> <th>DIM. mm</th> <th>TOL. mm/in</th> <th>DIM. in</th> <th>TOL. mm/in</th> </tr> </thead> <tbody> <tr> <td>NO PLACES</td> <td>X</td> <td>1/.04</td> <td>X.X</td> <td>0.01/0.05</td> </tr> <tr> <td>ONE PLACE</td> <td>X.X</td> <td>0.4/.016</td> <td>X.XX</td> <td>0.38/.01</td> </tr> <tr> <td>TWO PLACES</td> <td>X.XX</td> <td>0.19/.008</td> <td>X.XXX</td> <td>0.13/.005</td> </tr> <tr> <td>THREE PLACES</td> <td>X.XXX</td> <td></td> <td>X.XXXX</td> <td></td> </tr> </tbody> </table> DESIGN UNITS <input type="checkbox"/> METRIC <input checked="" type="checkbox"/> US CUSTOMARY		DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in	NO PLACES	X	1/.04	X.X	0.01/0.05	ONE PLACE	X.X	0.4/.016	X.XX	0.38/.01	TWO PLACES	X.XX	0.19/.008	X.XXX	0.13/.005	THREE PLACES	X.XXX		X.XXXX	
	DIM. mm		TOL. mm/in	DIM. in	TOL. mm/in																						
NO PLACES	X	1/.04	X.X	0.01/0.05																							
ONE PLACE	X.X	0.4/.016	X.XX	0.38/.01																							
TWO PLACES	X.XX	0.19/.008	X.XXX	0.13/.005																							
THREE PLACES	X.XXX		X.XXXX																								
OVERTRAVEL ----- .039 MIN	10A - 250 VAC 1/3HP-125 OR 250 VAC	WEIGHT																									

- 1 THE MINIMUM PLUNGER TRAVEL PAST BREAK, FOR A SAFE CONTACT GAP IS .060
- 3 - SWITCH PROVIDES BREAK BEFORE MAKE CIRCUITRY
- 4 - SIDE EXIT CABLE

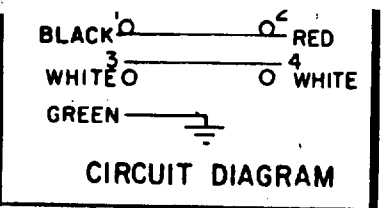

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

<b>CHARACTERISTICS</b>	<b>ELECTRICAL DATA</b>	SCALE FULL
		DO NOT SCALE PRINT
OPERATING FORCE ----- 5.1 LB MAX	CONTACT ARRANGEMENT S P D T D B	<b>UNLESS OTHERWISE SPECIFIED TOLERANCES ARE</b> ONE PLACE (.0) ± .030 TWO PLACE (.00) ± .015 THREE PLACE (.000) ± .005 ANGLES ±
OVERTRAVEL ----- .039 MIN	10A - 250 VAC 1/3HP-125 OR 250 VAC	