

MICRO SWITCH


A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
MINNEAPOLIS, MINNESOTA

FED. MFR. CODE 91929

SWITCH - BASIC

CATALOG LISTING
BA-2RB-A2

CATALOG LISTING
BA-2RB-A2
 PAGE 1 OF 1
 ISSUE 7
 DRAWING NUMBER
 REVISIONS
 A CO 9600
 29 APR 60
 B CO 34310
 20 DEC 74
 C CO-73287-J
 J A L
 22 NOV 93
 D CO-77590
 S A D
 8 JUN 94
 E CO 93346
 D L T
 22 AUG 98
 F CO-95750-B
 C S L
 29 MAR 00
 GCH 9 MAY 60
 CHECK
 60
 APR 29 1960
 FORMTEK
 3-50378

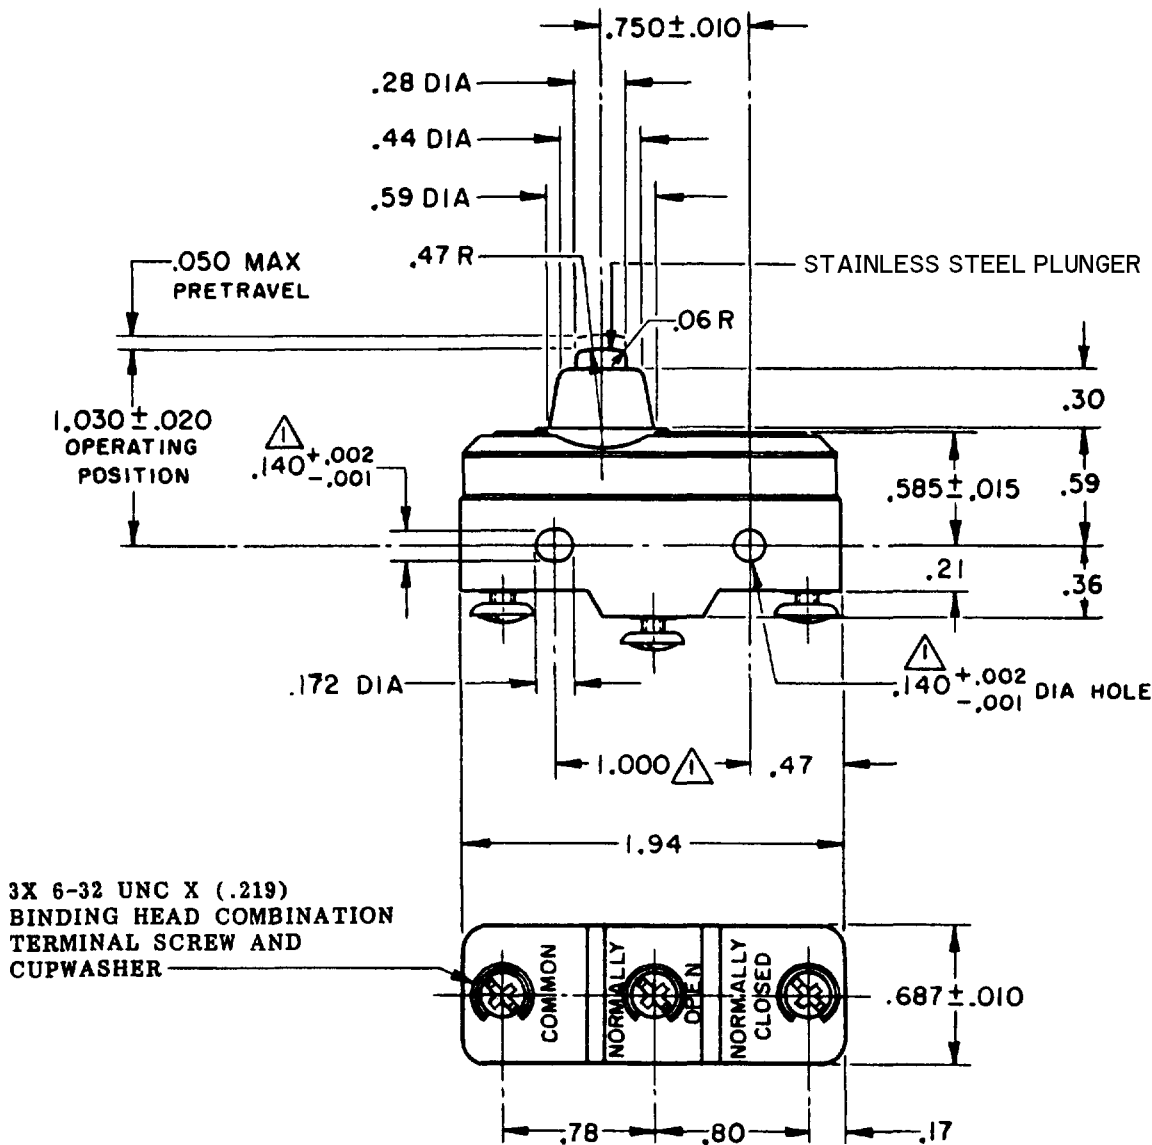

3X 6-32 UNC X (.219)
BINDING HEAD COMBINATION
TERMINAL SCREW AND
CUPWASHER

NOTE
 ▲ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
 OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE - - - - - 14-22 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE - - - - - 10 OZ MIN	L23 UNDERWRITERS' LAB. INC. LISTED RATING 20A - 125, 250 OR 480 VAC 10A - 125 VAC "L" 1HP - 125 VAC, 2HP - 250 VAC 1/2A - 125 VDC, 1/4A - 250 VDC	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ONE PLACE (.) ±.030 TWO PLACE (.) ±.015 THREE PLACE (.000) ±.005 ANGLES ±
DIFFERENTIAL TRAVEL - - - .002-.0075	L288 L299 L308	WEIGHT .064 LB
OVERTRAVEL - - - - - .094 MIN	CE D SA 20(3)A 250V ~ T85 5E4	