MICRO SWITCH
FREEPORT ILLINOIS. U S A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH—BASIC

CATALOG LISTING
BE-2RQ1-A4

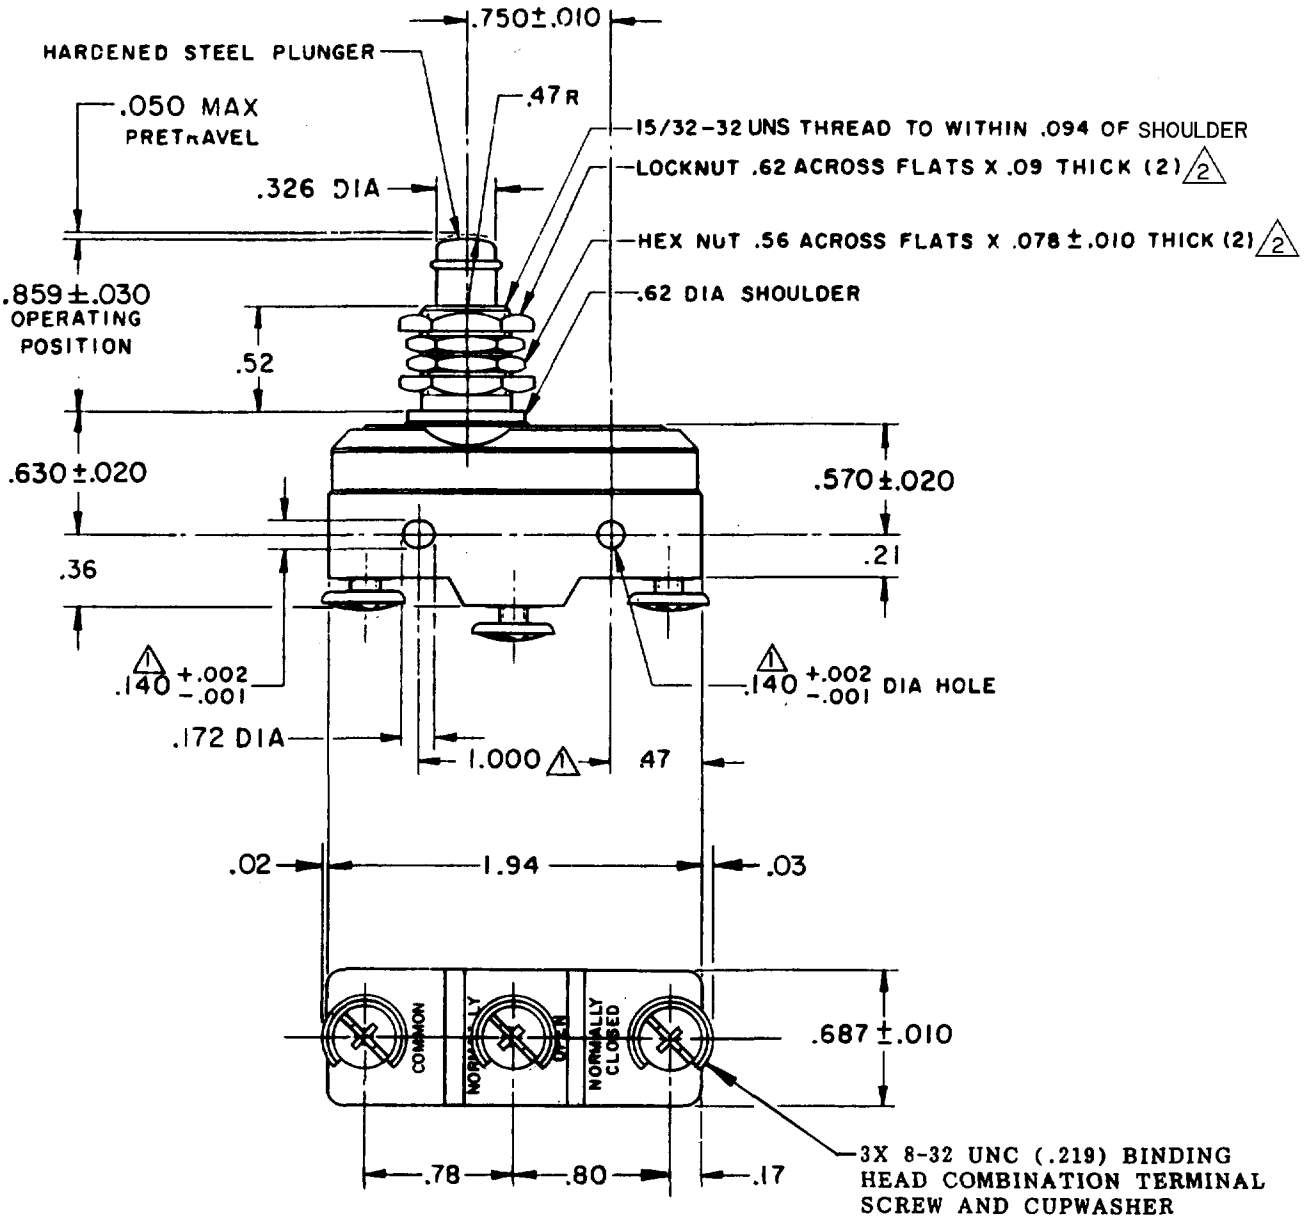

NOTES
1. MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS
2. HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS

OPERATING FORCE ——— 14-22 OZ
RELEASE FORCE ——— 10 OZ MIN
DIFFERENTIAL TRAVEL — .0020-.0075
OVERTRAVEL ——— .094 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

25A—125 or 250VAC
1HP—125VAC; 2HP—250VAC
PILOT DUTY 750VA—125, 250, 277VAC
60/75°C (Cu)

SCALE FULL
DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/.04		
ONE PLACE	X.X	0.4/.016	X.X	0.8/.03
TWO PLACES	X.XX	0.15/.008	X.XX	0.38/.015
THREE PLACES			X.XXX	0.13/.005
ANGLES				

DESIGN UNITS SI METRIC ☐ US CUSTOMARY ■

WEIGHT .084 LB

ISSUE	DRAWING NUMBER	RELEASE NO.	REPLACES
4	MBE-2RQ1-A4	PR-10343	BE-2RQ1-A4

REVISIONS			
A	CO 58782	WJM 25 JAN 86	
B	CO 73287-G	JAL 20 OCT 93	
C	CO-82133	CSL 26 JUL 96	

DRAWN	CHECK	CHECK	CHECK
JAP 6 JUL 81	CEB 6 JULY 81		

FORMTEK
FO-52848-A