MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING
BZ-R88-A2

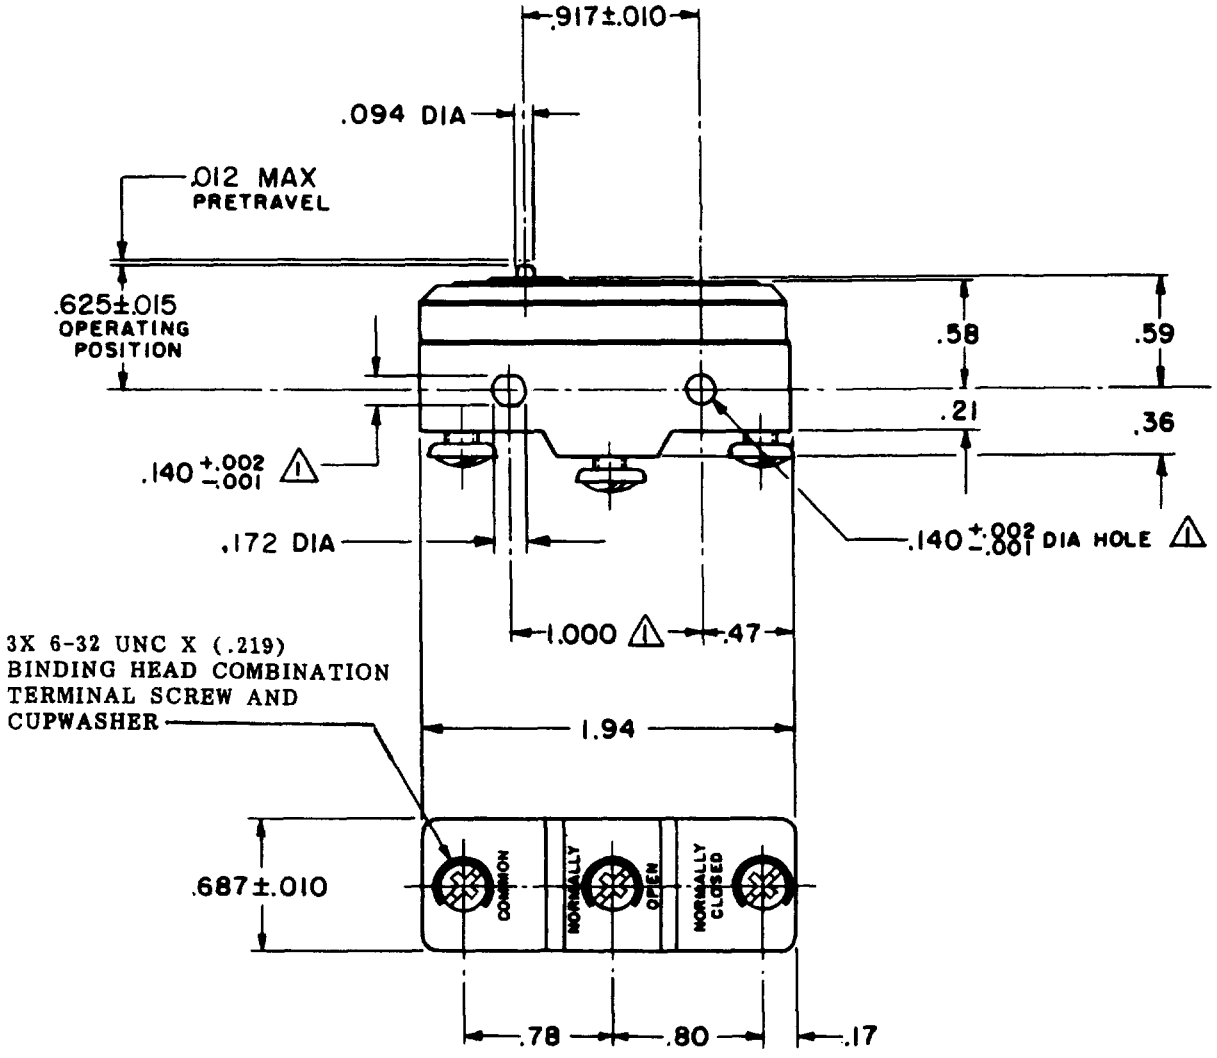

NOTE-
⚠ – MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ±.002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE	9 OZ	MAX
RELEASE FORCE	3 OZ	MIN
DIFFERENTIAL TRAVEL	.0007	MAX
OVERTRAVEL	.005	MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L8
10A 125, 250 OR 480 VAC

L288

SCALE FULL
DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .060 LB

CATALOG LISTING
BZ-R88-A2
PAGE 1 OF 1
ISSUE 6

REVISIONS

A	C015200	RLD 7 FEB 66		
B	CO-73287-J	JAL 22 NOV 93		
C	CO-77589	JAL 30 MAR 94		
D	203222	CSL 5 JUN 01		

RASTER
DRAWN RLD 7 FEB 66
CHECK LSD 14 FEB 66
FO-50378