

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
PINEBROOK, ILLINOIS

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ - RX

BZ - RX
ISSUE 10

BZ - RX

M

DRAWING NUMBER

ISSUE

13

REPLACES

RELEASE NO.

CHECK

REVISIONS


A	CO	16325	G C H	19 JAN 62
B	CO	34307	GLH	19 JAN 76
C	CO	077590	DLT	9 JUN 94

CHECK

B, JUNE 62

CHECK

DRAWN
G C H
19 JAN 62

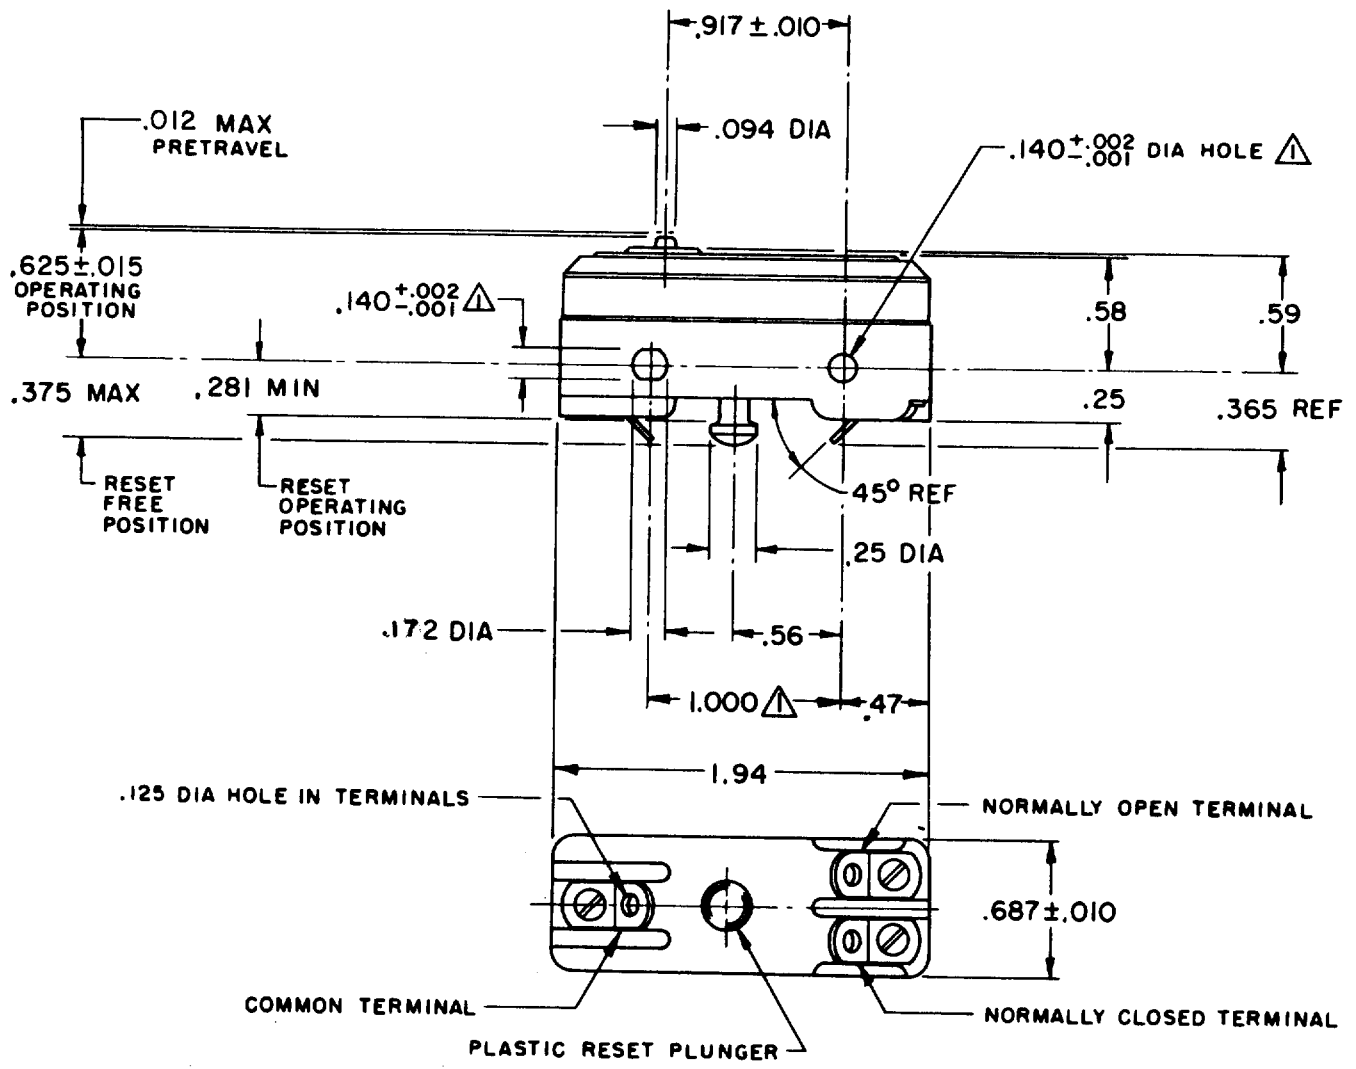

NOTE -
 ▲ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
 OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA		SCALE FULL
OPERATING FORCE ----- 7-9 OZ	CONTACT ARRANGEMENT	BREAK DISTANCE	DO NOT SCALE PRINT
OVERTRAVEL ----- .005 MIN	SINGLE POLE DOUBLE THROW MAINTAINED CONTACT		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
RESET CHARACTERISTICS	UNDERWRITERS' LAB. INC. LISTED RATING		TOLERANCES ARE:
OPERATING FORCE ----- 2-10 OZ	15 A - 125, 250, OR 480 VAC		ONE PLACE (.0) ± .030
OVERTRAVEL ----- .015 MIN	-L 67- 1/4 HP - 125 VAC; 1/2 HP - 250 VAC		TWO PLACE (.00) ± .015
	1/2 A - 125 VDC; 1/4 A - 250 VDC		THREE PLACE (.000) ± .005
			ANGLES ±
			WEIGHT .055 LB