MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

DWITCH-ENCLOSED

CATALOG LISTING
BZFI-2RN-RH
(RIGHT HAND)

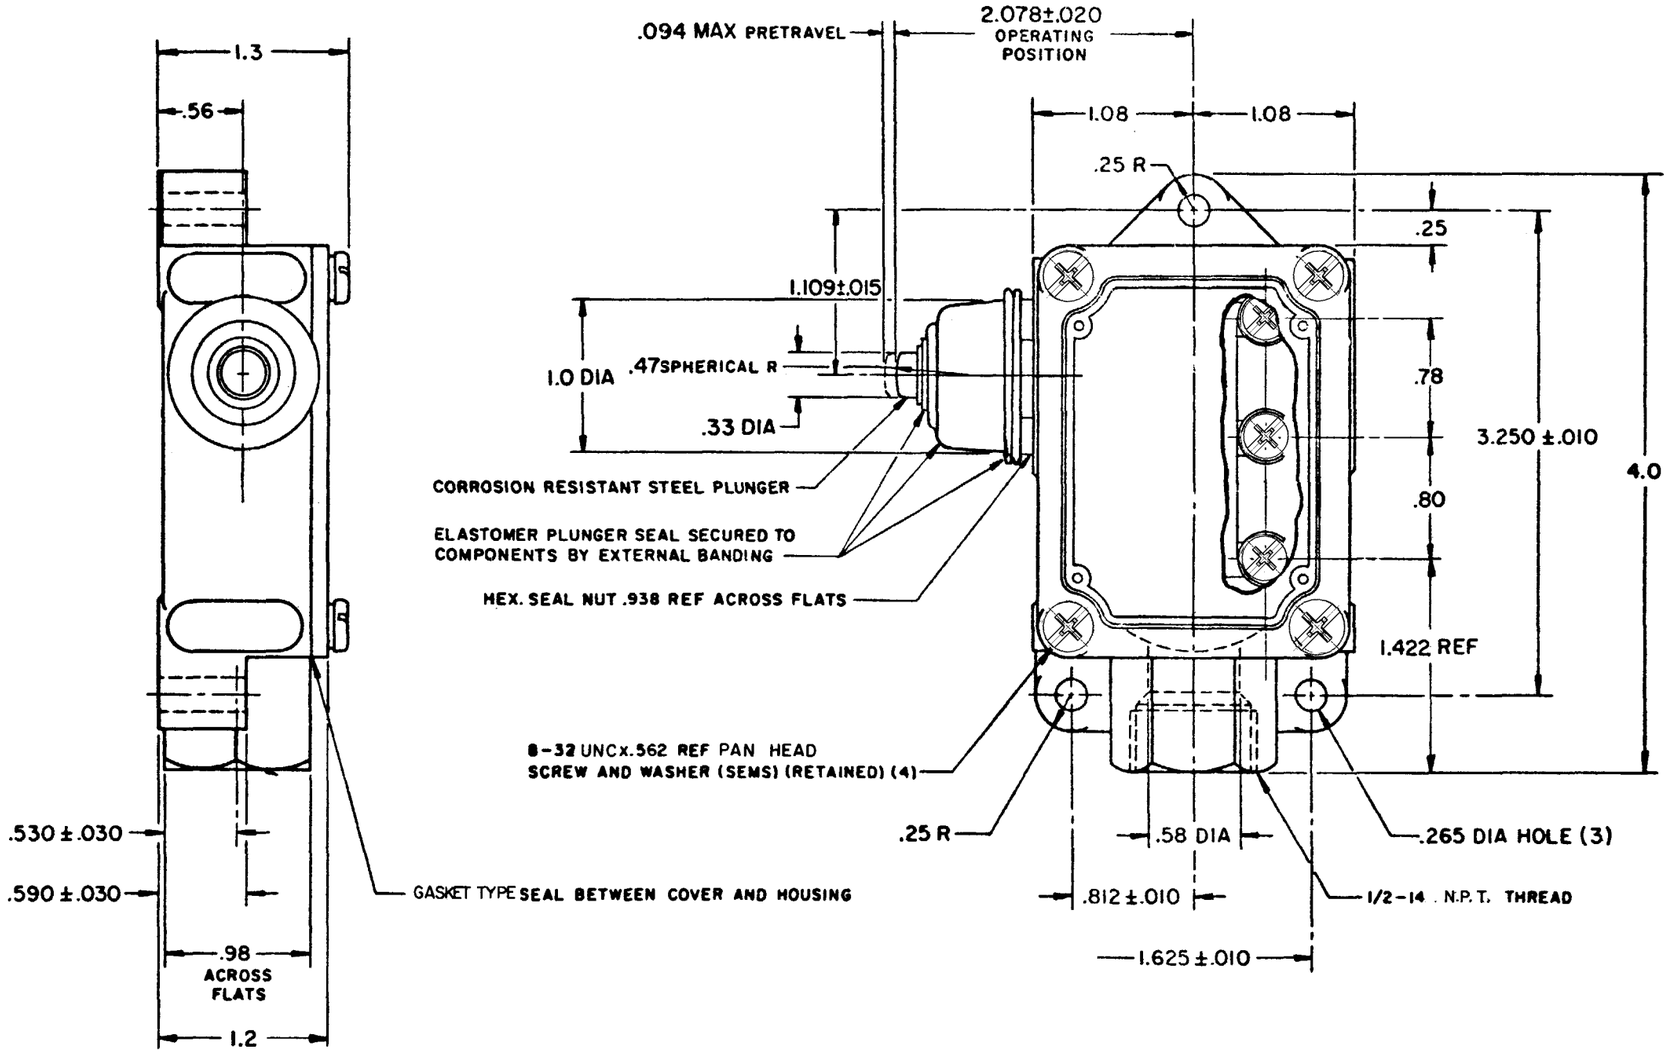

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CHARACTERISTICS	
OPERATING FORCE	2 LB MAX
RELEASE FORCE	1/2 LB MIN
DIFFERENTIAL TRAVEL	.004 MAX
OVERTRAVEL	.219 MIN
BASIC SWITCH REPLACEMENT	BZ-2R708-P7

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

-L96- 15 A-125, 250, OR 480 VAC
1/2 A-125 VDC ; 1/4 A-250 VDC
1/8 HP-125 VAC ; 1/4 HP-250 VAC

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .500 LB

NOTE

1 – 8–32 UNC X (.219) BINDER HEAD,COMBINATION , TERMINAL SCREWS AND CUPWASHERS (SEMS) (3)

CATALOG LISTING BZFI-2RN-RH
PAGE 1 OF 1
ISSUE 15
REPLACES
RELEASE NO.
CHECK
REVISIONS
A | CO-73287M | GJW 16 MAY 95
CHECK
CHECK 25 MAY 95 JJA
CHECK
16 MAY 95 GJW
DRAWN
FORMTEK