


DT-2RV22-A7
 RELEASE NO.
 DRAWING NUMBER
 ISSUE
 REVISIONS
 CHECK
 DRAWN
 FO-50378

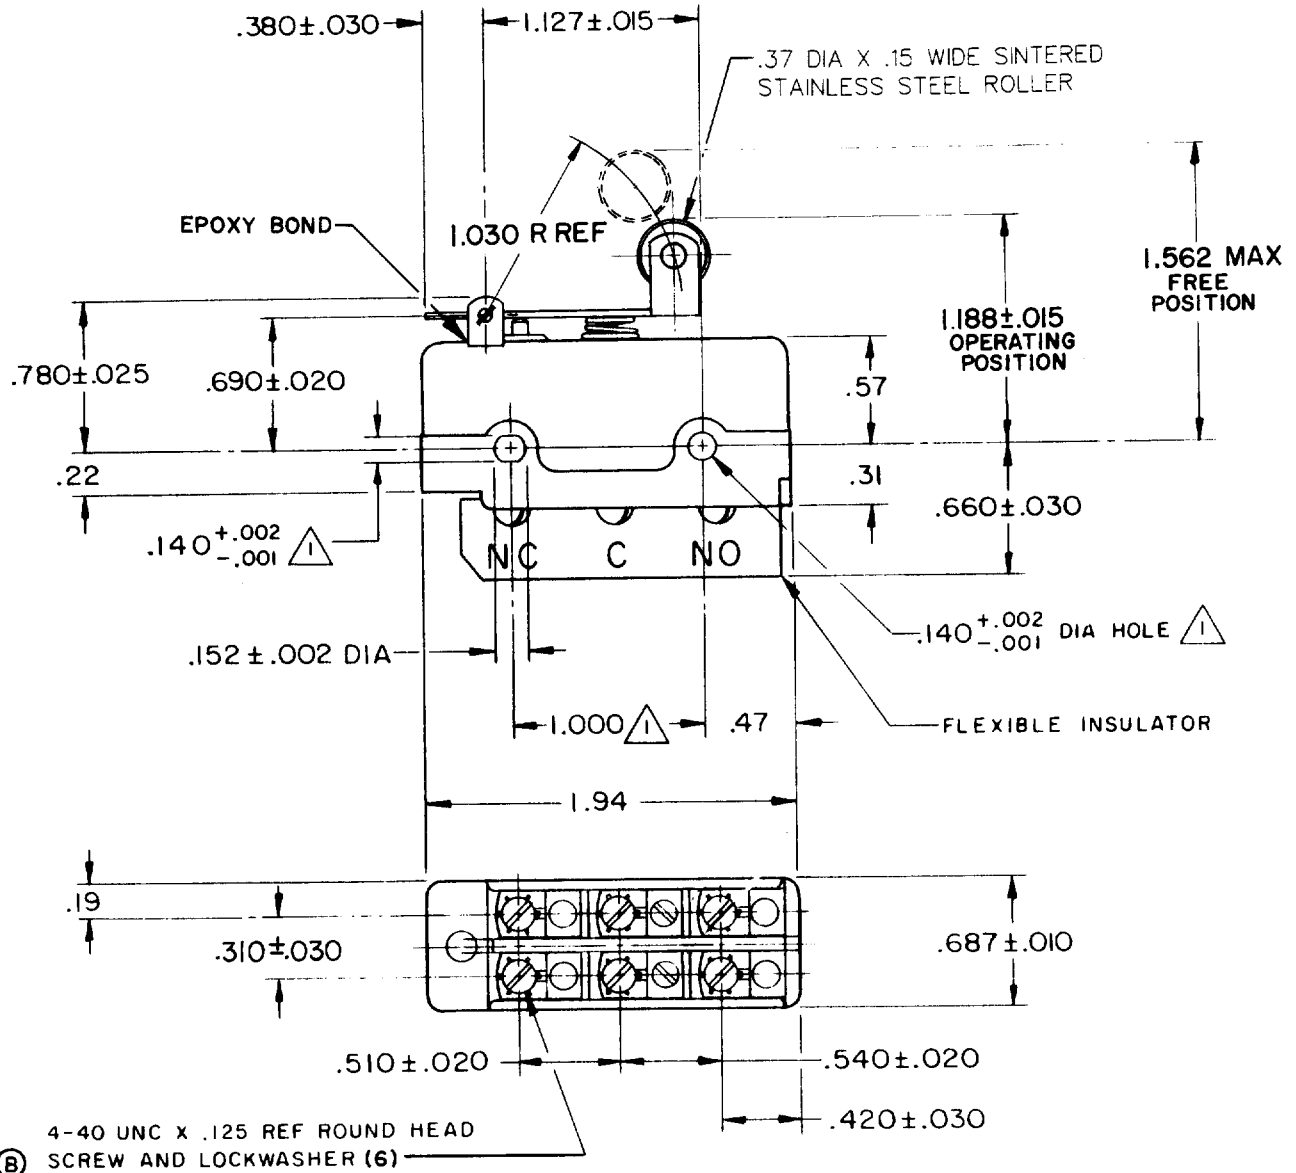

NOTE -
 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ----- 9-14 OZ	CONTACT ARRANGEMENT D P D T	DO NOT SCALE PRINT
RELEASE FORCE ----- 3 OZ MIN	UL LISTED-FILE E12252 CODE L59	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL ----- .195-.305	10A-125 OR 250 VAC	TOLERANCES ARE:
OVERTRAVEL ----- .031 MIN	0.3A-125 VDC; 0.15A-250 VDC	ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±
	SR	WEIGHT .085 LB