

M DT-2RV3-B6

RELEASE NO. PR-4620 REPLACES

DRAWING NUMBER

ISSUE **5**

CHECK

REVISIONS


A	CO37528	C J H	31 AUG 76
B	CO38280	K P K	31 MAR 77
C	CO46028	W J M	13 JUN 79
D	CO65429	J A P	4 APR 90

CHECK

6 JAN 75

6 JAN 75

FO-52848-A
 DRAWN
 B EN 2 JAN 75
 CHECK D J W

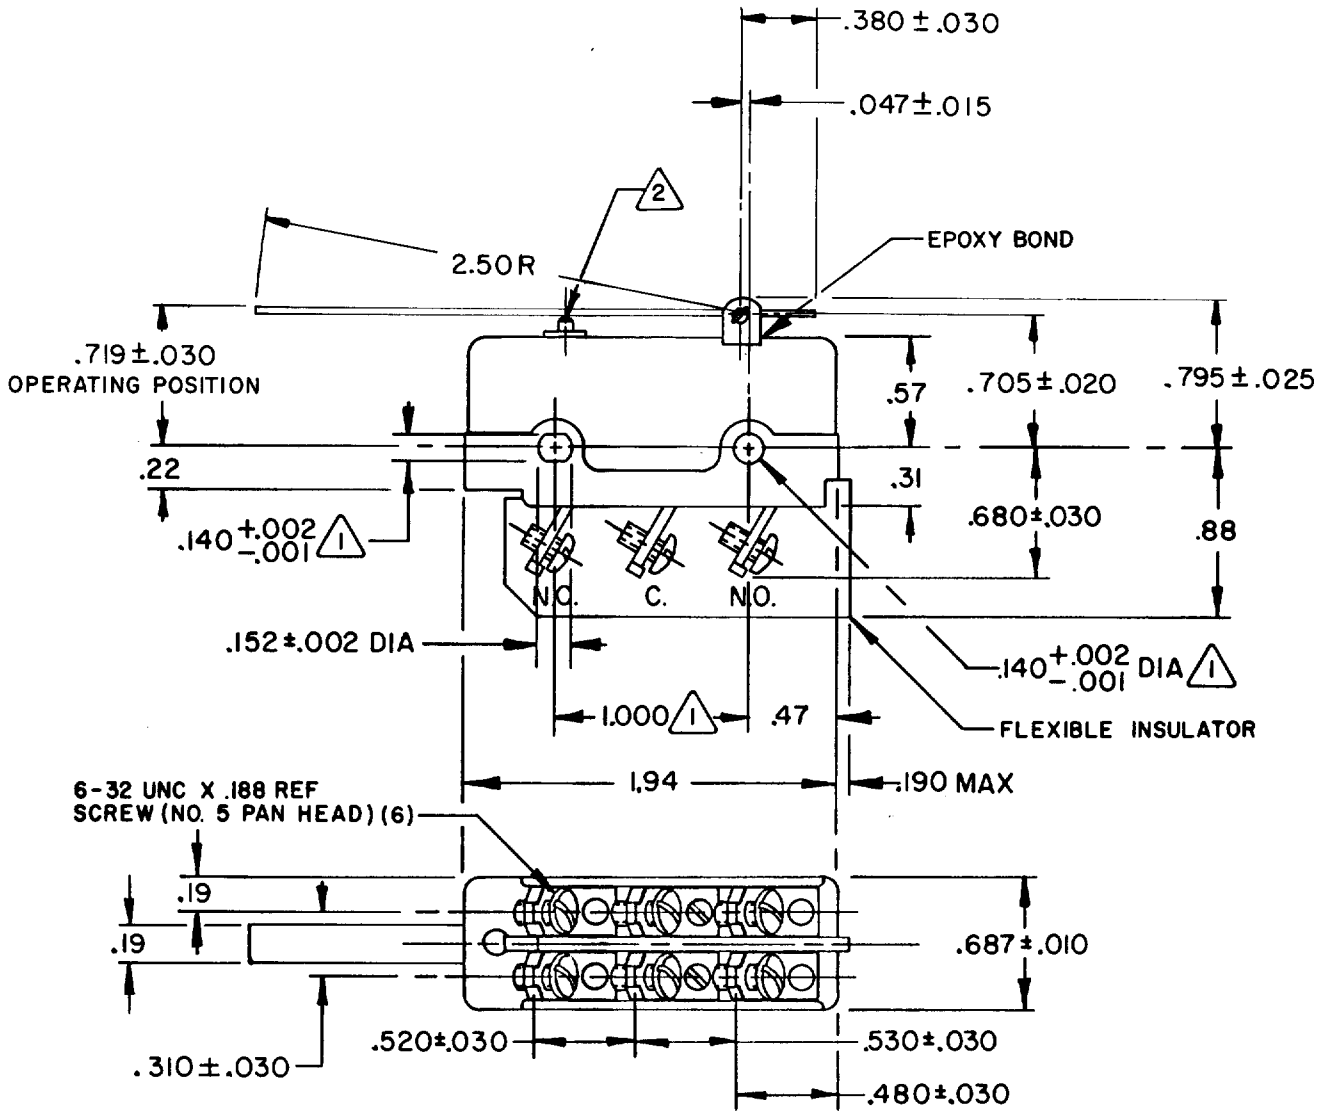

NOTE

(triangle 1) MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON $1.000 \pm .002$ CENTERS

(triangle 2) OVERTRAVEL TO BE MEASURED AT CENTER LINE OF PLUNGER

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS	ELECTRICAL DATA CONTACT ARRANGEMENT D P D T	SCALE FULL																							
		DO NOT SCALE PRINT																							
		TOLERANCES APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±																							
		<table border="1"> <thead> <tr> <th>DIM.</th> <th>TOL.</th> <th>DIM.</th> <th>TOL.</th> </tr> <tr> <th>mm</th> <th>mm/in</th> <th>in</th> <th>mm/in</th> </tr> </thead> <tbody> <tr> <td>NO PLACES</td> <td>X</td> <td>1/4</td> <td>X, X</td> </tr> <tr> <td>ONE PLACE</td> <td>X, X</td> <td>0.1/0.015</td> <td>X, X, X</td> </tr> <tr> <td>TWO PLACES</td> <td>X, XX</td> <td>0.15/0.006</td> <td>X, XXX</td> </tr> <tr> <td>THREE PLACES</td> <td>X, XXX</td> <td></td> <td>X, XXXX</td> </tr> </tbody> </table>	DIM.	TOL.	DIM.	TOL.	mm	mm/in	in	mm/in	NO PLACES	X	1/4	X, X	ONE PLACE	X, X	0.1/0.015	X, X, X	TWO PLACES	X, XX	0.15/0.006	X, XXX	THREE PLACES	X, XXX	
DIM.	TOL.	DIM.	TOL.																						
mm	mm/in	in	mm/in																						
NO PLACES	X	1/4	X, X																						
ONE PLACE	X, X	0.1/0.015	X, X, X																						
TWO PLACES	X, XX	0.15/0.006	X, XXX																						
THREE PLACES	X, XXX		X, XXXX																						
WEIGHT .085 LB																									

OPERATING FORCE ——— 4-7 OZ

RELEASE FORCE ——— 1/2 OZ MIN

DIFFERENTIAL TRAVEL ——— .115 — .190

OVERTRAVEL ——— (triangle 2) .010 MIN

UL LISTED-FILE E12252
 CODE L59
 10A-125 OR 250 VAC
 0.3A-125 VDC; 0.15A-250 VDC

SI METRIC
 DESIGN UNITS US CUSTOMARY

WEIGHT .085 LB