

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91 929

SWITCH-BASIC



CATALOG LISTING

V7-1S17D8-201

CW-B8650

CATALOG LISTING
V7-1S17D8-201
PAGE 1 OF 1
RELEASE NO. PR-18499
REPLACES
ISSUE
M
5


REVISIONS
A C082776
J A F
5 APR 96
B CO-
93311
TSM
22 OCT 98
CHECK
W J C
22 AUG 90
CHECK
W L S
16 AUG 90
DRAWN
FORMTEK

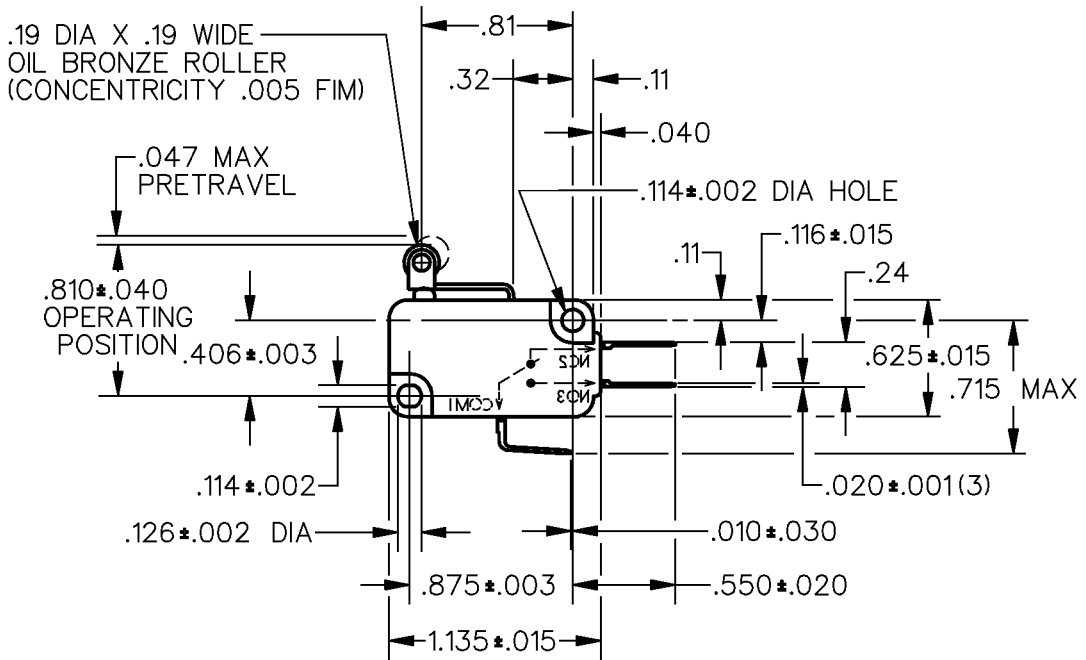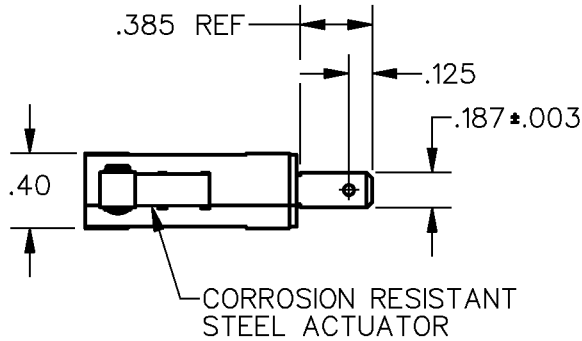

NOTES
1 - IN INSPECTION, DO NOT BURN OUT - GOLD CONTACT
2 - IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE -----170 GRAM MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	ONE PLACE (.0) ± .030
RELEASE FORCE -----20 GRAM MIN	0.1A 125 VAC L142		TWO PLACE (.00) ± .015
DIFFERENTIAL TRAVEL-----0.12 MAX			THREE PLACE (.000) ± .005
OVERTRAVEL -----0.040 MIN			ANGLES ±
RELEASE TRAVEL -----0.007 MIN			WEIGHT

