MICRO SWITCH
a Honeywell Division
FED.MFG.CODE 91929

SWITCH-BASIC

CATALOG LISTING
V7-6C17D8-048-1
CW-C6019

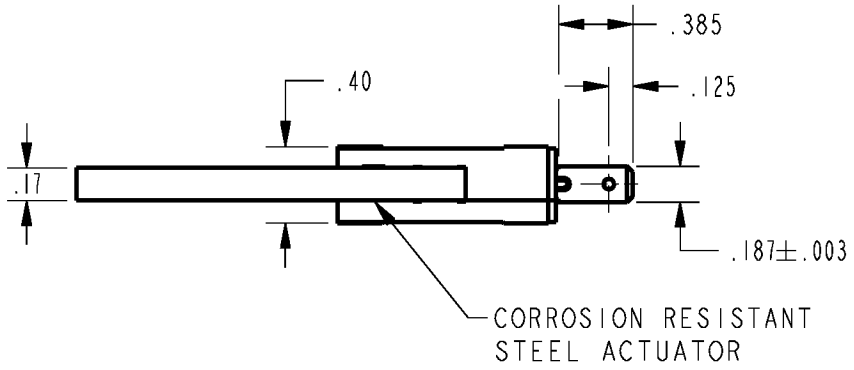

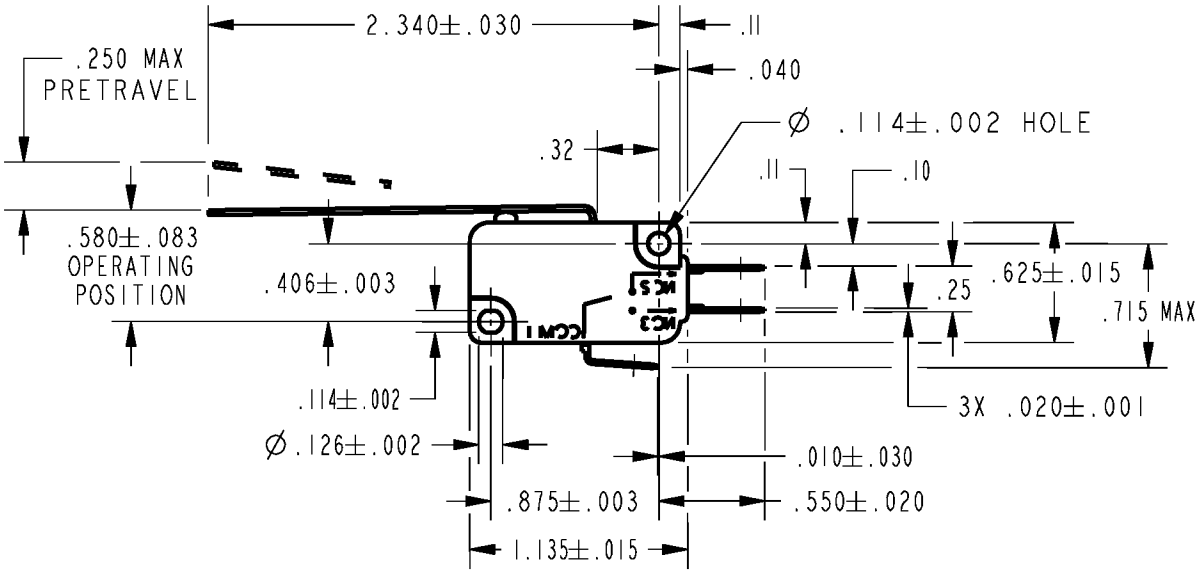

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS

OPERATING FORCE----- 120 GRAMS MAX
RELEASE FORCE--------- 19 GRAMS MIN
DIFFERENTIAL TRAVEL------- .010-.054
OVERTRAVEL---------- .124 MIN
RELEASE TRAVEL---------- .030 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L215
15.1A 1/2HP 125, 250 OR 277 VAC
1/2A 125 VDC
1/4A 250 VDC; 5A 120 VAC "L"

SCALE FULL | DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

REVISIONS

A	206828	GLH 15NOV02

CATALOG LISTING V7-6C17D8-048-1 | PAGE 1 OF 1 | ISSUE 3 | REPLACES - | RELEASE NO. PR-22880

DRAWN	GLH	15NOV02
CHECK	SAV	15NOV02
CHECK		
CHECK		

PTC/CAD 2D