

CURRENT TRANSFORMERS

Window diameter .557" & .850"

Model: **13 1000 T-R** & **13 1000 T-B**

Linearity $\pm 3\%$

All Models:

Fully encapsulated.

Indoor/outdoor applications.

Application:

For Current To Voltage Conversion with known load.




Continuous Thermal Rating:

1.33 at 30 C. amb.; 1.0 at 55 C. amb.


Insulation Class:

0.6 kV. BIL 10kV. full wave.

50-400 Hz.

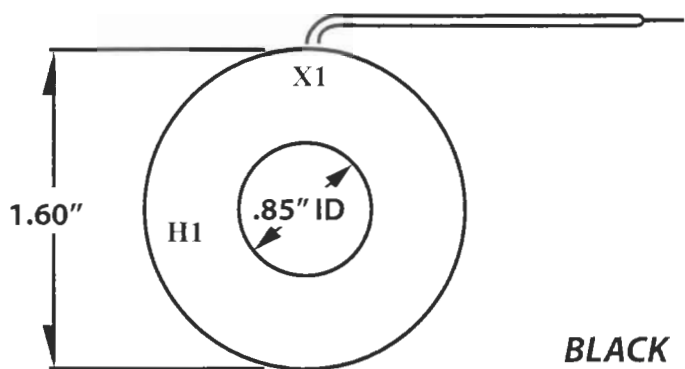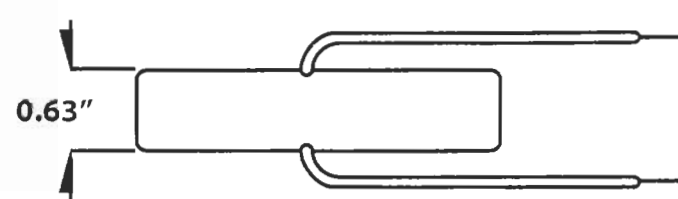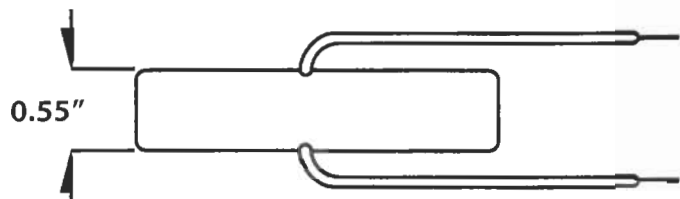

BLACK

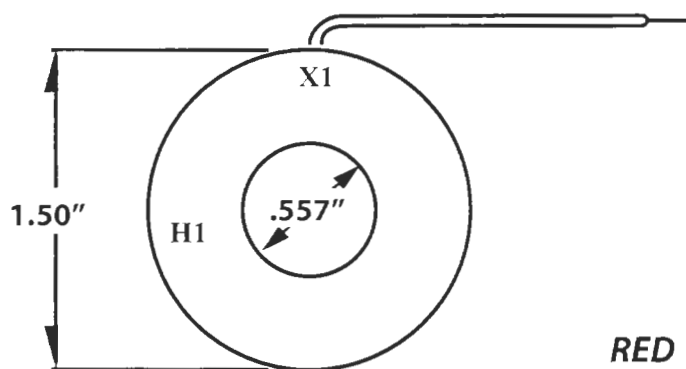

RED

Model # 13 1000 T-B

*18" leads with female 1/4" spade; connector with insulator .85" ID .5"W

Model # 13 1000 T-R

*24" leads; customer supplied connector

Flexible leads are UL 3173 125°C.
CSA approved, #20 AWG 24" long.

Non-Standard length to be specified.

Additional ratios available.

Approximate weight 0.5 lb.

