


HBL26419 -- Hubbellock Plug




3P4W, 60A 600V AC Max, Steel Shell with Yellow Cover

Product Specifications

Product Type	 <p style="text-align: center;">Hubbellock Devices</p>
Product Item	Plug
Wiring Scheme	3 Pole, 4 Wire Grounding
Multi-Rating	60A 600V AC
Device Color	Yellow
Cord Dia.	.875"-1.480" (22.2-37.5)
Blade Holder Material	Black Thermoset
Housing Material	Gray Polycarbonate
Cord Clamp Material	Neoprene sleeve
Blade Material	Brass
Terminal Screw Material	Copper lug terminals with steel set screws
Ground Screw Material	Copper lug terminals with steel set screws
Cord Clamp Screw Material	Stainless steel, Multi-drive
Body Holding Screw Material	Stainless steel, Multi-drive

Ratings	Marked onto body
Catalog No.	Marked onto body
Dielectric Voltage Withstand	2,000V minimum
Current Interrupting	Certified for current interrupting at full rated current.
Temperature Rise	Max 30C temperature rise at full rated current after 50 cycles of overload at 150% of rated current at a power factor of .75.
Cord Accommodation	Round portable service cords of diameters commensurate with the device rating as defined in UL Standard 62, CSA C22.2 No. 49.
Terminal Accommodation	#10 AWG min - #4 AWG max.
Terminal Identification	Terminals identified in accordance with UL 498 (X, Y, Z, White, Green)
Flammability	HB or better per UL 94 or CSA 22.2 No. 0.6
Operating Temperatures	Maximum Continuous 75 C Minimum -40 C (w/o impact)
Moisture Resistance	IP30
Listings	UL/CSA
Catalog Page	Click here for catalog page B79
Hubbellnet	Click here for Hubbellnet
Catalog Section	Click here for Section-B
UPC Number	78358501732
Weight in LBs	2.1




HUBBELLOCK® Devices 3 Pole, 4 Wire Grounding

60 Ampere, 600 Volts AC

Receptacles, Plug, Connector Body and Flanged Devices




IP30
SUITABILITY



Receptacles IP44 SUITABILITY

Description	Catalog Numbers
Black phenolic interior with short aluminum housing and lift cover.	HBL26410 –
Black phenolic interior with long aluminum housing and lift cover.	HBL26420 –



Connector Body

Description	Catalog Number
Black phenolic interior with yellow thermoplastic sleeve over steel cover.	HBL26418 –

Note: Cord clamp range .92"-1.45" (23.36-36.83).




Flanged Receptacle IP44 SUITABILITY

Description	Catalog Number
Black phenolic interior with steel housing and flange.	HBL26421 –

Plug


Description	Catalog Number
Black phenolic interior with yellow thermoplastic sleeve over steel housing.	– HBL26419

Note: Cord clamp range .92"-1.45" (23.36-36.83).

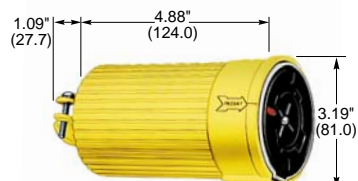

Flanged Inlet

Description	Catalog Number
Black phenolic interior with steel housing and flange.	– HBL26422

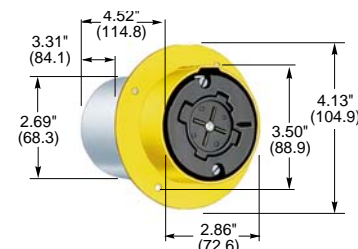

Box and Adapter Plates

Description	Catalog Numbers
Box, cast aluminum, only for 60A Hubbelllock® receptacles.	HBL26401
Straight adapter plate.	HBL26402
45° adapter plate.	HBL26404

Note: Straight or angle adapter plate must be used when mounting a 60A receptacle to HBL26401 box.

Kellems® Cable Grip

Description	Cord Dia.	Catalog Number
Cable grip (not shown).	.83"-1.00" (21.1-25.4)	H660A

