


HBL3521C -- Twist-Lock Plug




4P5W, 20A 250V/10A 600V AC, Non-NEMA, Black & White
Nylon

Product Specifications

Product Type	 <p>Twist-Lock Devices</p>
Product Item	Plug
Wiring Scheme	4 Pole, 5 Wire Grounding
Amperage	20A
Voltage	Multi Rated
NEMA Configuration	Non-NEMA
Item Style	Insulgrip
Device Color	Black/White
Cord Dia.	.35"-1.15" (9-29)
Blade Holder Material	Natural White Nylon
Terminal Retainer Material	Clear polycarbonate
Housing Material	Black nylon
Cord Clamp Material	Natural (white) nylon
Blade Material	Brass

Terminal Clamp Material	.08" (2) steel-nickel plated
Terminal Screw Material	#10-32 Brass (white finish on neutral screw when used) Multi-drive
Ground Screw Material	#10-32 Brass (green finish) Multi-drive
Cord Clamp Screw Material	Steel, zinc plated Multi-drive
Body Holding Screw Material	Steel, zinc plated Multi-drive
Ratings	Molded into face.
Catalog No.	Permanently ink marked on body.
Dielectric Voltage Withstand	2,000V minimum
Current Interrupting	Certified for current interrupting at full rated current.
Temperature Rise	Max 30 C temperature rise at full rated current after 50 cycles of overload at 150% of rated current at a power factor of .75.
Cord Accommodation	Round portable service cords of diameters commensurate with the device rating as defined in UL Standard 62, CSA C22.2 No. 49.
Terminal Accommodation	20A #12 AWG
Terminal Identification	Terminals identified in accordance with UL 498 (X, Y, Z, White, Green)
Flammability	HB or better per UL 94 or CSA 22.2 No. 0.6
Operating Temperatures	Maximum Continuous 75 C Minimum -40 C (w/o impact)
Moisture Resistance	IP20
Listings	UL/CSA
Catalog Page	Click here for catalog page B57
Hubbellnet	Click here for Hubbellnet
Catalog Section	Click here for Section-B
UPC Number	78358503991
Weight in LBs	0.3



TWIST-LOCK® Devices

4 Pole, 5 Wire Grounding

20 Ampere, 250 Volts, 10 Ampere, 600 Volts AC

Receptacle, INSULGRIP® Plug and Connector Body



For Replacement Use Only




Non-NEMA
20A 250V
10A 600V AC
UL/CSA



Non-NEMA
20A 250V
10A 600V AC
UL/CSA

Receptacle

Description	Catalog Number
Black urea, back wired.	HBL3520 -

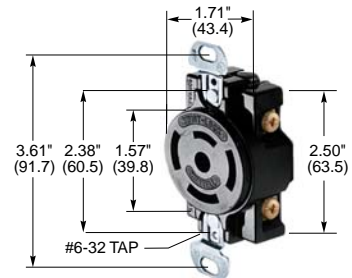

HBL3520

Insulgrip Plug IP20 SUITABILITY

Description	Catalog Number
Black and white nylon.	- HBL3521C



HBL3521C

Insulgrip Connector Body IP20 SUITABILITY


Description	Catalog Number
Black and white nylon.	HBL3523C -



HBL3523C

Insulgrip Flanged Inlet


Description	Catalog Number
Nylon casing, back wired.	- HBL3525C

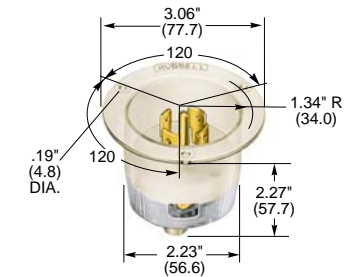

HBL3525C

Insulgrip Flanged Receptacle

Description	Catalog Number
Nylon casing, back wired.	HBL3524C -

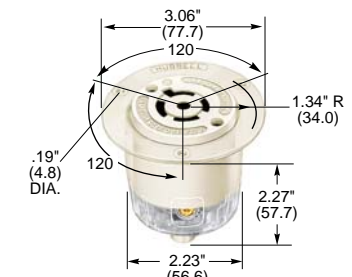

HBL3524C

Notes: Cord grip range for plug and connector body .35"-1.15" (9-29).
See pages B-70 and B-71 for accessories.
For technical information on Insulgrip plug and connector body see page B-83.

CAUTION: To avoid electrical shock, review premises carefully and do not use if slot or blade configuration (design) is already in a circuit having a rating differing from the rating of this device.