

## HBL7102C -- Twist-Lock Plug




2P2W, 20A 250V, L2-20P, Black & White  
Nylon

### Product Specifications

<b>Product Type</b>	 <p><b>Twist-Lock Devices</b></p>
<b>Product Item</b>	Plug
<b>Wiring Scheme</b>	2 Pole, 2 Wire Non-Grounding
<b>Amperage</b>	20A
<b>Voltage</b>	250V AC
<b>NEMA Configuration</b>	L2-20P
<b>Item Style</b>	Standard
<b>Device Color</b>	Black/White
<b>Horsepower</b>	2
<b>Cord Dia.</b>	.230"-.720" (5.8-18.3)
<b>Blade Holder Material</b>	Natural White Nylon
<b>Terminal Retainer Material</b>	Clear polycarbonate
<b>Housing Material</b>	Black nylon
<b>Cord Clamp Material</b>	Natural (white) nylon
<b>Blade Material</b>	Brass

<b>Terminal Clamp Material</b>	Cold rolled steel-nickel-plated
<b>Terminal Screw Material</b>	#8-32 Brass
<b>Cord Clamp Screw Material</b>	Steel-zinc-plated
<b>Body Holding Screw Material</b>	Steel-zinc-plated
<b>Ratings</b>	Molded into face
<b>Dielectric Voltage Withstand</b>	2000V minimum
<b>Current Interrupting</b>	Certified for current interrupting at full rated current.
<b>Temperature Rise</b>	Max 30C temperature rise at full rated current after 50 cycles of overload at 150% of rated current at a power factor of .75.
<b>Cord Accommodation</b>	Round portable service cords of diameters commensurate with the device rating as defined in UL Standard 62, CSA C22.2 No. 49.
<b>Terminal Accommodation</b>	20A-#12AWG
<b>Terminal Identification</b>	Terminals identified in accordance with UL 498
<b>Flammability</b>	HB or better per UL 94 or CSA 22.2 No. 0.6
<b>Operating Temperatures</b>	Maximum Continuous 75 C Minimum -40 C (w/o impact)
<b>Moisture Resistance</b>	IP20
<b>Catalog Page</b>	<a href="#">Click here for catalog page B4</a>
<b>Hubbellnet</b>	<a href="#">Click here for Hubbellnet</a>
<b>Catalog Section</b>	<a href="#">Click here for Section-B</a>
<b>UPC Number</b>	78358517705
<b>Weight in LBS</b>	0.15

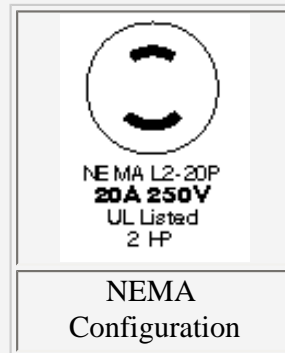


# TWIST-LOCK® Devices

## 2 Pole, 2 Wire Non-Grounding

20 Ampere, 250 Volts


### Receptacles, INSULGRIP® Plug, Connector Body Flanged Inlet, Flanged Receptacles



**HBL7210B**




**HBL7102C**



**HBL7101C**



**HBL8815C**



**HBL8809C**



**HBL3226**



NEMA L2-20R  
20A 250V  
UL Listed  
2 HP



NEMA L2-20P  
20A 250V  
UL Listed  
2 HP

### Receptacles

Description	Catalog Numbers
Single, black phenolic.	<b>HBL7210B</b> —
Single, mounted on 4" (101.6) round box cover, black phenolic.	<b>HBL7217B</b> —

### Insulgrip Plug

Description	Cord Dia.	Catalog Number
Black and white nylon, polarized. Multiple drive screws.	.220"-.720" (5.6-18.3)	— <b>HBL7102C</b>

### Insulgrip Connector Body

Description	Cord Dia.	Catalog Number
Black and white nylon. Multiple drive screws.	.220"-.720" (5.6-18.3)	<b>HBL7101C</b> —

### Insulgrip Flanged Inlet

Description	Catalog Number
Nylon casing, back wired, polarized. Multiple drive screws.	— <b>HBL8815C</b>

### Flanged Receptacles

Description	Catalog Numbers
Insulgrip nylon casing, back wired. Multiple drive screws.	<b>HBL8809C</b> —
Metal flange, stainless steel casing, black phenolic, exposed terminals.	<b>HBL3226</b> —

*Notes: Only receptacles and plugs are HP rated.  
Horsepower ratings listed above are AC only.  
See pages B-66 and B-67 for accessories.*