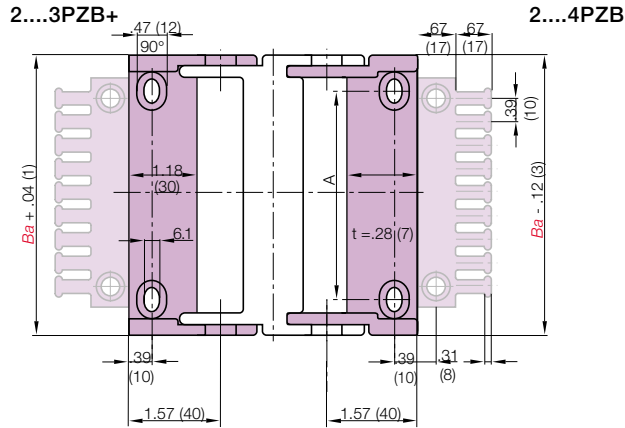
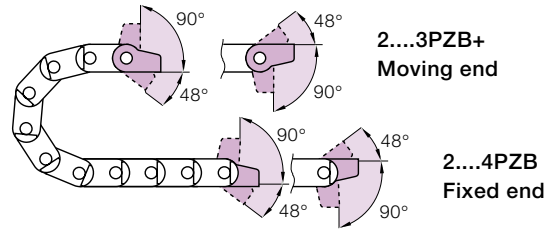


## Mounting Brackets

### Option 1: polymer pivoting

- Pivoting
- Short and long travel
- Space-restricted conditions
- Corrosion-resistant

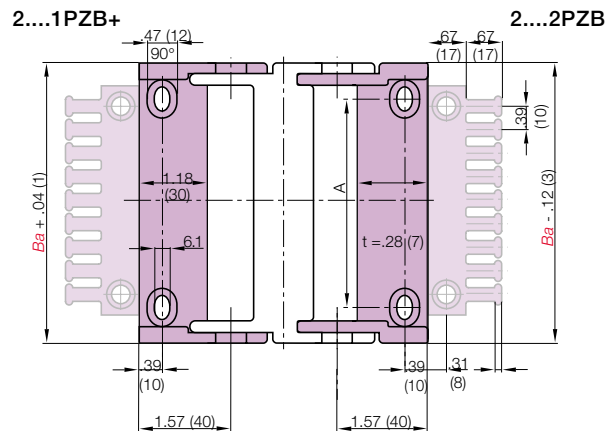
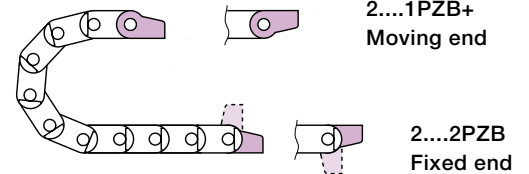


Chain Type	Part No. Full Set with Tiewrap Plates	Part No. Set with Tiewrap Plates and 10 Cable Tiewraps	Part No. Mounting Bracket Set	Dimension A in. (mm)
2480-03	2030-34PZB+	2030-34PZBK1+	2030-34PZ+	.98 (25)
2480-05	2050-34PZB+	2050-34PZBK1+	2050-34PZ+	1.73 (44)
2480-07	2070-34PZB+	2070-34PZBK1+	2070-34PZ+	2.52 (64)
2480-10	2100-34PZB+	2100-34PZBK1+	2100-34PZ+	3.54 (90)

2...34 PZB+ = Full set, each part with pin/bore, including tiewrap plates  
 2...3 PZB+ = Mounting bracket with bore, including tiewrap plates  
 2...4 PZB = Mounting bracket with pin, including tiewrap plates

### Option 2: polymer locking

- Locked connections
- Vertical hanging/standing travels
- Extreme accelerations
- Corrosion-resistant



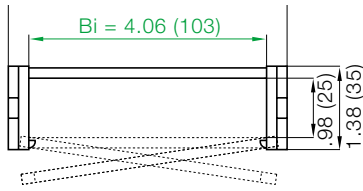




Chain Type	Part No. Full Set with Tiewrap Plates	Part No. Set with Tiewrap Plates and 10 Cable Tiewraps	Part No. Mounting Bracket Set	Dimension A in. (mm)
2480-03	2030-12PZB+	2030-12PZBK1+	2030-12PZ+	.98 (25)
2480-05	2050-12PZB+	2050-12PZBK1+	2050-12PZ+	1.73 (44)
2480-07	2070-12PZB+	2070-12PZBK1+	2070-12PZ+	2.52 (64)
2480-10	2100-12PZB+	2100-12PZBK1+	2100-12PZ+	3.54 (90)

2...12 PZB+ = Full set, each part with pin/bore, including tiewrap plates  
 2...1 PZB+ = Mounting bracket with bore, including tiewrap plates  
 2...2 PZB = Mounting bracket with pin, including tiewrap plates

# Order Example and Technical Data: Series R2480 “E2 Tubes”


## Order example

**2480-10**

**1. Chain selection:**
**2480-10-100-0**

**2. Mounting brackets:**
**2100-34-PZB+**

**3. Interior separation:**

2 separators, unassembled, (Part No. 24501), or assembled every other link (Part No. 24511). Alternative interior separation configuration according to design layout possible.

**4. Additional information on guide troughs ► Chapter 9**

For 16.4 ft (5 m) chain, color black, with pivoting mounting brackets  
16.4 ft (5 m) 2480-10-100-0 and 2100-34PZ+



## Technical data

Chain Type	Weight Per Link		Weight	
	(oz.)	(g)	(lbs/ft)	(kg/m)
2480-03	0.081	(0.037)	0.54	(0.81)
2480-05	0.090	(0.041)	0.60	(0.90)
2480-07	0.101	(0.046)	0.68	(1.01)
2480-10	0.128	(0.058)	0.77	(1.15)

<b>Material</b>	igumid G
<b>Permitted temperature</b>	-40°/+266°F (-40°/+130°C)
<b>Gliding speed max.</b>	16.4 ft/s (5 m/s)
<b>Unsupported V max.</b>	32.8 ft/s (10 m/s)
<b>Flammability class</b>	VDE 0304 IIC UL94 1H