

International Rectifier


- RoHS Compliant ①
- Lead-Free (Qualified up to 260°C Reflow)
- Application Specific MOSFETs
- Ideal for High Performance Isolated Converter Primary Switch Socket
- Optimized for Synchronous Rectification
- Low Conduction Losses
- High CdV/dt Immunity
- Low Profile (<0.7mm)
- Dual Sided Cooling Compatible ①
- Compatible with existing Surface Mount Techniques ①

IRF6662PbF IRF6662TRPbF

DirectFET™ Power MOSFET ②

Typical values (unless otherwise specified)

V_{DSS}	V_{GS}	$R_{DS(on)}$				
100V max	$\pm 20V$ max	17.5mΩ@ 10V				
Q_g tot	Q_{gd}	Q_{gs2}	Q_{rr}	Q_{oss}	$V_{gs(th)}$	
22nC	6.8nC	1.2nC	50nC	11nC	3.9V	

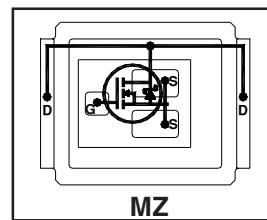

Applicable DirectFET Outline and Substrate Outline (see p.7,8 for details) ①

SQ	SX	ST		MQ	MX	MT	MZ		
----	----	----	--	----	----	----	----	--	--

Description

The IRF6662PbF combines the latest HEXFET® Power MOSFET Silicon technology with the advanced DirectFET™ packaging to achieve the lowest on-state resistance in a package that has the footprint of a SO-8 and only 0.7 mm profile. The DirectFET package is compatible with existing layout geometries used in power applications, PCB assembly equipment and vapor phase, infra-red or convection soldering techniques. Application note AN-1035 is followed regarding the manufacturing methods and processes. The DirectFET package allows dual sided cooling to maximize thermal transfer in power systems, improving previous best thermal resistance by 80%.

The IRF6662PbF is optimized for primary side bridge topologies in isolated DC-DC applications, for wide range universal input Telecom applications (36V - 75V), and for secondary side synchronous rectification in regulated DC-DC topologies. The reduced total losses in the device coupled with the high level of thermal performance enables high efficiency and low temperatures, which are key for system reliability improvements, and makes this device ideal for high performance isolated DC-DC converters.

Absolute Maximum Ratings

	Parameter	Max.	Units
V_{DS}	Drain-to-Source Voltage	100	V
V_{GS}	Gate-to-Source Voltage	± 20	
I_D @ $T_A = 25^\circ\text{C}$	Continuous Drain Current, V_{GS} @ 10V ③	8.3	A
I_D @ $T_A = 70^\circ\text{C}$	Continuous Drain Current, V_{GS} @ 10V ③	6.6	
I_D @ $T_C = 25^\circ\text{C}$	Continuous Drain Current, V_{GS} @ 10V ④	47	
I_{DM}	Pulsed Drain Current ⑤	66	
E_{AS}	Single Pulse Avalanche Energy ⑥	39	mJ
I_{AR}	Avalanche Current ⑤	4.9	A

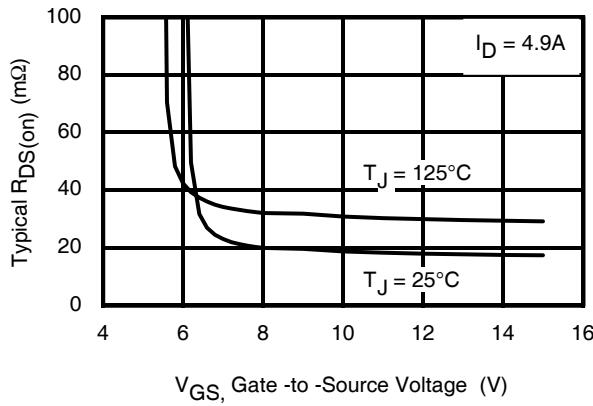


Fig 1. Typical On-Resistance vs. Gate Voltage

Notes:

- ① Click on this section to link to the appropriate technical paper.
- ② Click on this section to link to the DirectFET Website.
- ③ Surface mounted on 1 in. square Cu board, steady state.

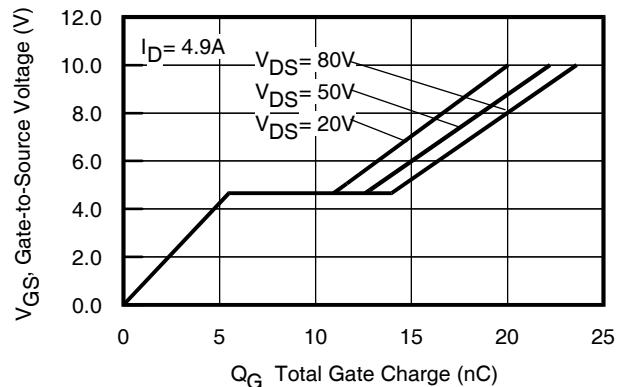


Fig 2. Typical Total Gate Charge vs. Gate-to-Source Voltage

- ④ T_C measured with thermocouple mounted to top (Drain) of part.
- ⑤ Repetitive rating; pulse width limited by max. junction temperature.
- ⑥ Starting $T_J = 25^\circ\text{C}$, $L = 3.2\text{mH}$, $R_G = 25\Omega$, $I_{AS} = 4.9\text{A}$.

Static @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)


	Parameter	Min.	Typ.	Max.	Units	Conditions
BV_{DSS}	Drain-to-Source Breakdown Voltage	100	—	—	V	$V_{\text{GS}} = 0\text{V}, I_D = 250\mu\text{A}$
$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	Breakdown Voltage Temp. Coefficient	—	0.10	—	V/ $^\circ\text{C}$	Reference to 25°C , $I_D = 1\text{mA}$
$R_{\text{DS(on)}}$	Static Drain-to-Source On-Resistance	—	17.5	22	$\text{m}\Omega$	$V_{\text{GS}} = 10\text{V}, I_D = 8.2\text{A}$ ⑦
$V_{\text{GS(th)}}$	Gate Threshold Voltage	3.0	3.9	4.9	V	$V_{\text{DS}} = V_{\text{GS}}, I_D = 100\mu\text{A}$
$\Delta V_{\text{GS(th)}}/\Delta T_J$	Gate Threshold Voltage Coefficient	—	-9.7	—	$\text{mV}/^\circ\text{C}$	
I_{DSs}	Drain-to-Source Leakage Current	—	—	20	μA	$V_{\text{DS}} = 100\text{V}, V_{\text{GS}} = 0\text{V}$
		—	—	250		$V_{\text{DS}} = 80\text{V}, V_{\text{GS}} = 0\text{V}, T_J = 125^\circ\text{C}$
I_{GSS}	Gate-to-Source Forward Leakage	—	—	100	nA	$V_{\text{GS}} = 20\text{V}$
	Gate-to-Source Reverse Leakage	—	—	-100		$V_{\text{GS}} = -20\text{V}$
g_{fs}	Forward Transconductance	11	—	—	S	$V_{\text{DS}} = 10\text{V}, I_D = 4.9\text{A}$
Q_g	Total Gate Charge	—	22	31	nC	
Q_{gs1}	Pre-Vth Gate-to-Source Charge	—	4.9	—		$V_{\text{DS}} = 50\text{V}$
Q_{gs2}	Post-Vth Gate-to-Source Charge	—	1.2	—		$V_{\text{GS}} = 10\text{V}$
Q_{gd}	Gate-to-Drain Charge	—	6.8	10		$I_D = 4.9\text{A}$
Q_{godr}	Gate Charge Overdrive	—	9.1	—		See Fig. 15
Q_{sw}	Switch Charge ($Q_{\text{gs2}} + Q_{\text{gd}}$)	—	8.0	—	nC	
Q_{oss}	Output Charge	—	11	—		$V_{\text{DS}} = 16\text{V}, V_{\text{GS}} = 0\text{V}$
R_G	Gate Resistance	—	1.2	—	Ω	
$t_{\text{d(on)}}$	Turn-On Delay Time	—	11	—	ns	$V_{\text{DD}} = 50\text{V}, V_{\text{GS}} = 10\text{V}$ ⑦
t_r	Rise Time	—	7.5	—		$I_D = 4.9\text{A}$
$t_{\text{d(off)}}$	Turn-Off Delay Time	—	24	—		$R_G = 6.2\Omega$
t_f	Fall Time	—	5.9	—		See Fig. 17
C_{iss}	Input Capacitance	—	1360	—	pF	$V_{\text{GS}} = 0\text{V}$
C_{oss}	Output Capacitance	—	270	—		$V_{\text{DS}} = 25\text{V}$
C_{rss}	Reverse Transfer Capacitance	—	61	—		$f = 1.0\text{MHz}$
C_{oss}	Output Capacitance	—	1340	—		$V_{\text{GS}} = 0\text{V}, V_{\text{DS}} = 1.0\text{V}, f=1.0\text{MHz}$
C_{oss}	Output Capacitance	—	160	—		$V_{\text{GS}} = 0\text{V}, V_{\text{DS}} = 80\text{V}, f=1.0\text{MHz}$

Diode Characteristics

	Parameter	Min.	Typ.	Max.	Units	Conditions
I_s	Continuous Source Current (Body Diode)	—	—	2.5	A	MOSFET symbol showing the integral reverse p-n junction diode.
I_{SM}	Pulsed Source Current (Body Diode) ⑤	—	—	66		
V_{SD}	Diode Forward Voltage	—	—	1.3		$T_J = 25^\circ\text{C}, I_s = 4.9\text{A}, V_{\text{GS}} = 0\text{V}$ ⑦
t_{rr}	Reverse Recovery Time	—	34	51	ns	$T_J = 25^\circ\text{C}, I_F = 4.9\text{A}, V_{\text{DD}} = 50\text{V}$
Q_{rr}	Reverse Recovery Charge	—	50	75	nC	$dI/dt = 100\text{A}/\mu\text{s}$ ⑦ See Fig. 18

Notes:

⑤ Repetitive rating; pulse width limited by max. junction temperature.

⑦ Pulse width $\leq 400\mu\text{s}$; duty cycle $\leq 2\%$.

Absolute Maximum Ratings

	Parameter	Max.	Units
P _D @ T _A = 25°C	Power Dissipation ③	2.8	W
P _D @ T _A = 70°C	Power Dissipation ③	1.8	
P _D @ T _C = 25°C	Power Dissipation ④	89	
T _P	Peak Soldering Temperature	270	°C
T _J	Operating Junction and Storage Temperature Range	-40 to + 150	
T _{STG}			

Thermal Resistance

	Parameter	Typ.	Max.	Units
R _{θJA}	Junction-to-Ambient ③ ⑩	—	45	°C/W
R _{θJA}	Junction-to-Ambient ⑨ ⑩	12.5	—	
R _{θJA}	Junction-to-Ambient ⑩ ⑩	20	—	
R _{θJC}	Junction-to-Case ④ ⑩	—	1.4	
R _{θJ-PCB}	Junction-to-PCB Mounted ③	1.0	—	


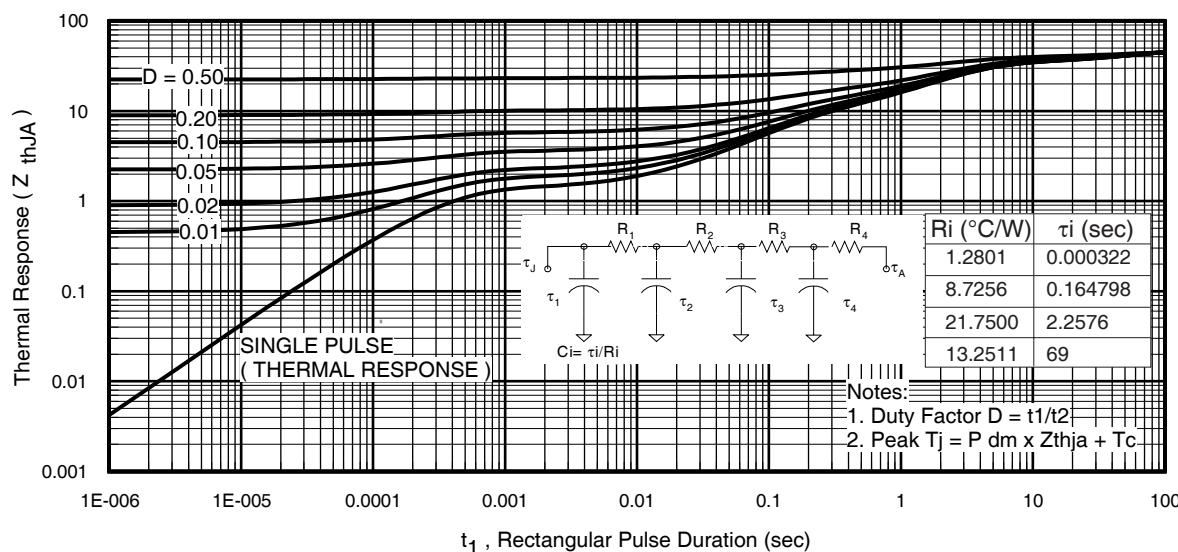


Fig 3. Maximum Effective Transient Thermal Impedance, Junction-to-Ambient ①


Notes:

- ③ Used double sided cooling , mounting pad.
- ⑩ Mounted on minimum footprint full size board with metalized back and with small clip heatsink.


① R_θ is measured at T_j of approximately 90°C.

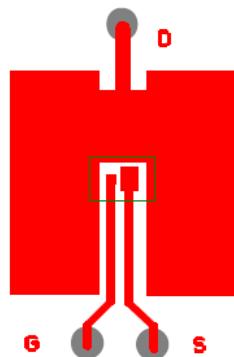

③ Surface mounted on 1 in. square Cu (still air).

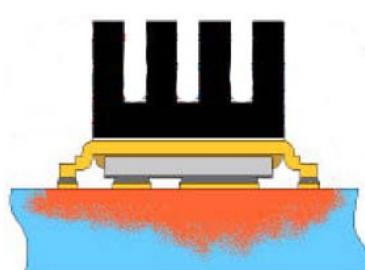

⑨ Mounted to a PCB with small clip heatsink (still air)

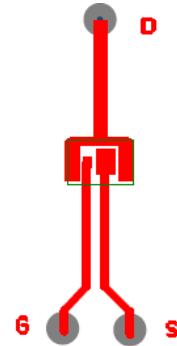

⑩ Mounted on minimum footprint full size board with metalized back and with small clip heatsink (still air)



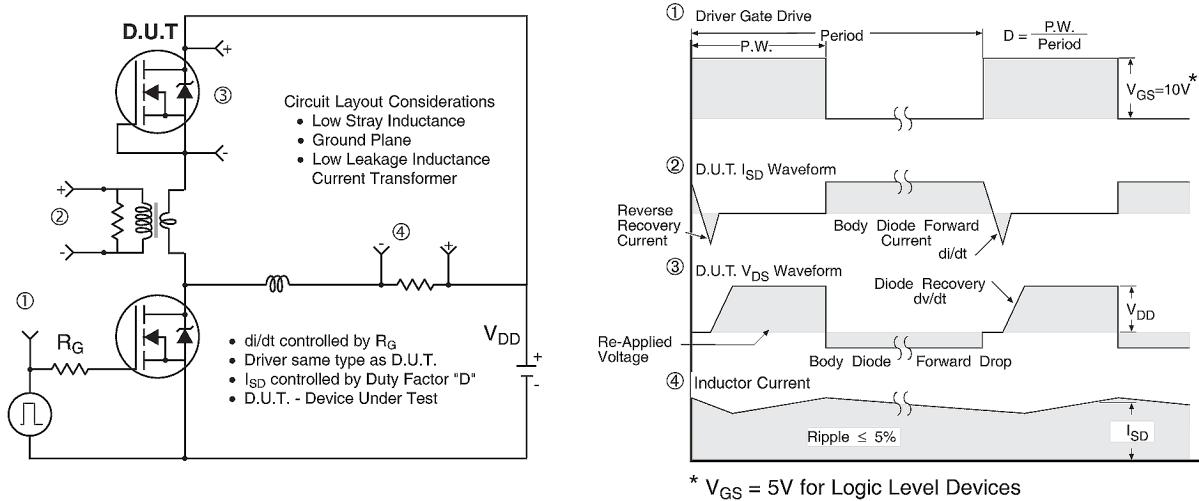


Fig 18. Diode Reverse Recovery Test Circuit for N-Channel HEXFET® Power MOSFETs

DirectFET™ Substrate and PCB Layout, MZ Outline ③ (Medium Size Can, Z-Designation).


Please see DirectFET application note AN-1035 for all details regarding the assembly of DirectFET.

This includes all recommendations for stencil and substrate designs.

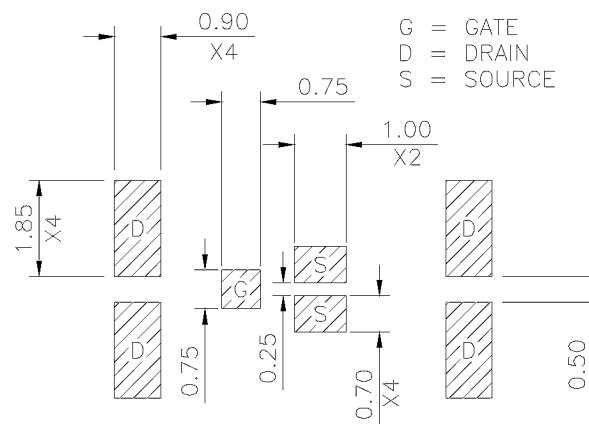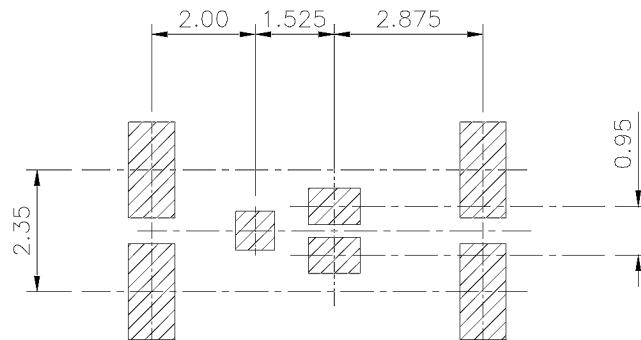


DirectFET™ Outline Dimension, MZ Outline (Medium Size Can, Z-Designation).


Please see DirectFET application note AN-1035 for all details regarding the assembly of DirectFET.
This includes all recommendations for stencil and substrate designs.

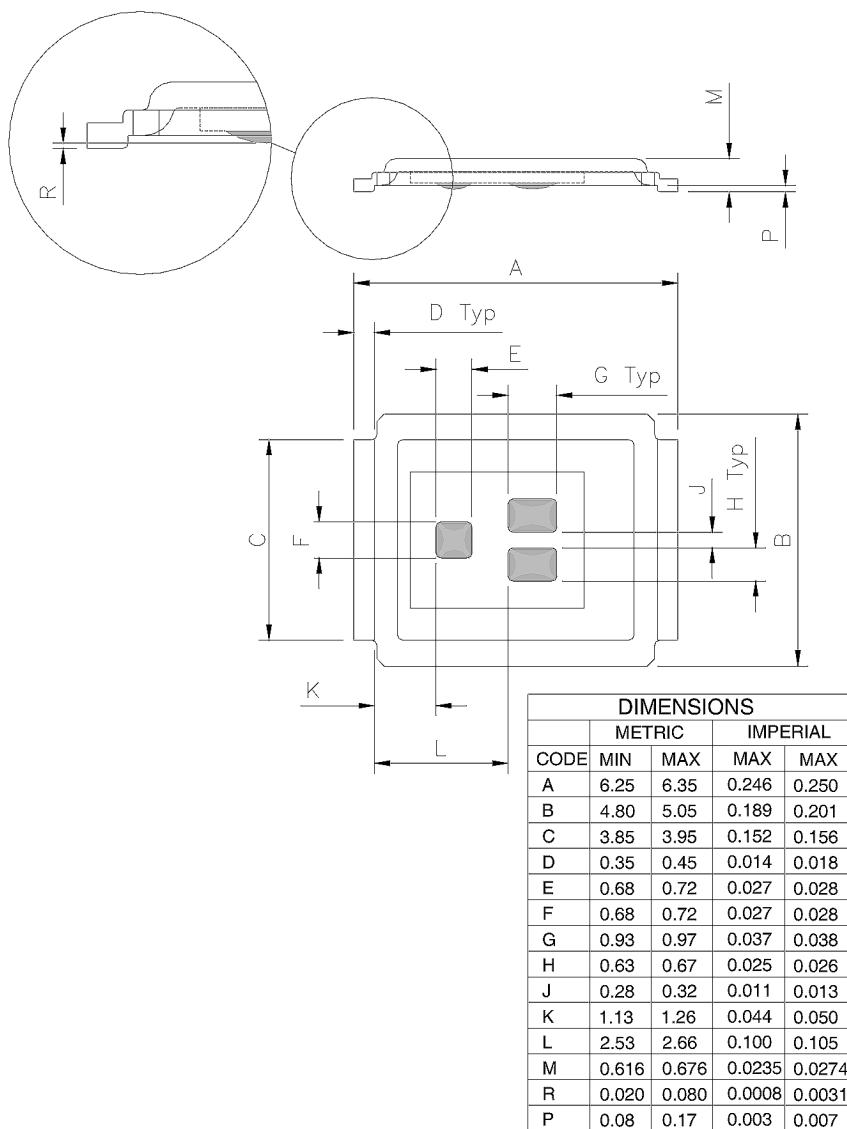

DirectFET™ Part Marking

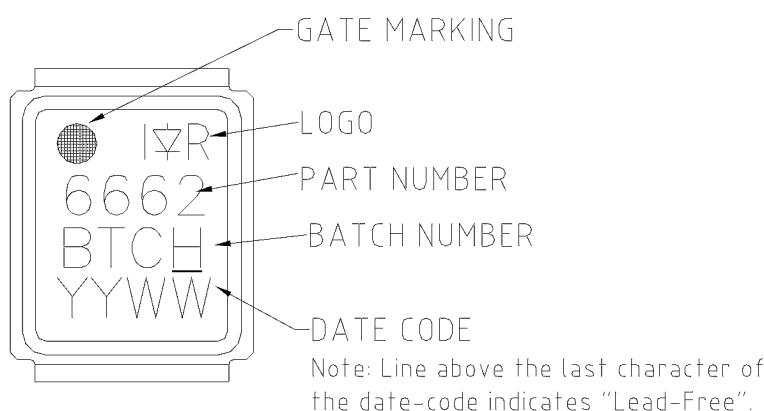



DirectFET™ Tape & Reel Dimension (Showing component orientation).

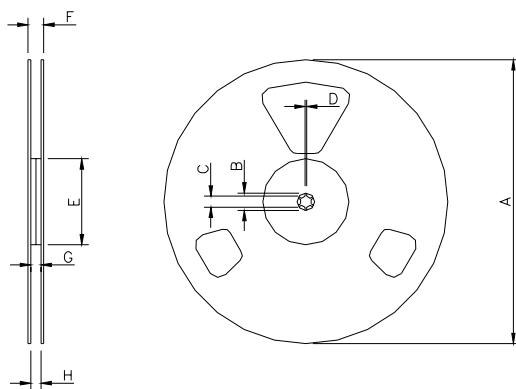

NOTE: Controlling dimensions in mm
Std reel quantity is 4800 parts. (ordered as IRF6662TRPB). For 1000 parts on 7" reel, order IRF6662TR1PBF

REEL DIMENSIONS								
CODE	STANDARD OPTION (QTY 4800)				TR1 OPTION (QTY 1000)			
	METRIC		IMPERIAL		METRIC		IMPERIAL	
A	330.0	N.C.	12.992	N.C.	177.77	N.C.	6.9	N.C.
B	20.2	N.C.	0.795	N.C.	19.06	N.C.	0.75	N.C.
C	12.8	13.2	0.504	0.520	13.5	12.8	0.53	0.50
D	1.5	N.C.	0.059	N.C.	1.5	N.C.	0.059	N.C.
E	100.0	N.C.	3.937	N.C.	58.72	N.C.	2.31	N.C.
F	N.C.	18.4	N.C.	0.724	N.C.	13.50	N.C.	0.53
G	12.4	14.4	0.488	0.567	11.9	12.01	0.47	N.C.
H	11.9	15.4	0.469	0.606	11.9	12.01	0.47	N.C.

LOADED TAPE FEED DIRECTION

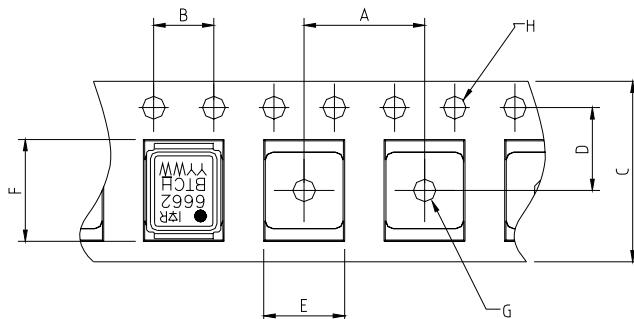

DIMENSIONS							
CODE	METRIC		IMPERIAL		MIN	MAX	
	MIN	MAX	MIN	MAX			
A	7.90	8.10	0.311	0.319			
B	3.90	4.10	0.154	0.161			
C	11.90	12.30	0.469	0.484			
D	5.45	5.55	0.215	0.219			
E	5.10	5.30	0.201	0.209			
F	6.50	6.70	0.256	0.264			
G	1.50	N.C.	0.059	N.C.			
H	1.50	1.60	0.059	0.063			

Data and specifications subject to change without notice.
This product has been designed and qualified for the Consumer market.
Qualification Standards can be found on IR's Web site.

International
IR Rectifier