

Product Catalog

[Search Again](#)

[Product Information](#) | [Product Specifications](#) | [IPC](#) | [Bellcore](#) | [Part Numbers](#)

Product Information [Back to Top](#)

245

Kester "245" Low Residue Flux for cored solder wire was developed to complement the newer generations of Low Residue liquid fluxes being used by the electronics industry. The chemistry is based on some of the same principles that have been safely used for years in mildly activated rosin fluxes. The use of "245" Low Residue Flux results in visually acceptable assemblies without cleaning, yet soldering quality and efficiency is comparable to that obtained with mildly activated rosin flux. Kester "245" Low Residue Flux is classified as Type ROL0 flux under IPC ANSI/J-STD-004 Joint Industry Standard. This flux was formerly classified as Type LR per MIL-F-14256.


[View Data Sheet \(English\)](#)

[Find MSDS](#)

[Request a Sample](#)

[Request a Quote](#)

Get more from every wafer.

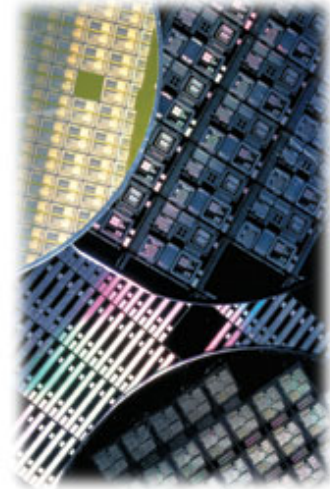

Kester's SE-CURE 7101 bumping paste

Product Specifications [Back to Top](#)

IPC [Back to Top](#)

Silver Chromate:	Pass
Classification:	ROL0
SIR:	Pass
Halide Content:	None
Copper Plate Corrosion:	L
Copper Mirror:	L

Bellcore [Back to Top](#)

SIR	Pass
EM:	Pass
Silver Chromate:	Pass
Copper Mirror:	L

Part Numbers [Back to Top](#)

Alloy	Packaging	Americas	Asia Pacific	Europe	Japan	Brazil
Sn63Pb37	1 lb., 0.015" diameter, 50 core	24-63337-8806 UPC:	Contact Us	Contact Us	Contact Us	Contact Us
Sn63Pb37	1 lb., 0.020" diameter, 50 core	24-6337-8807 UPC:	Contact Us	Contact Us	Contact Us	Contact Us

Sn63Pb37	1 lb., 0.020" diameter, 58 core	24-6337-8834 UPC:	Contact Us	Contact Us	Contact Us	Contact Us
Sn63Pb37	1 lb., 0.025" diameter, 50 core	24-6337-8809 UPC:	Contact Us	Contact Us	Contact Us	Contact Us
Sn63Pb37	1 lb., 0.031" diameter, 50 core	24-6337-8800 UPC:	Contact Us	Contact Us	Contact Us	Contact Us
Sn63Pb37	1 lb., 0.031" diameter, 58 core	24-6337-8801 UPC:	Contact Us	Contact Us	Contact Us	Contact Us
Sn63Pb37	1 lb., 0.031" diameter, 66 core	24-6337-8802 UPC:	Contact Us	Contact Us	Contact Us	Contact Us
Sn63Pb37	1 lb., 0.040" diameter, 50 core	24-6337-8813 UPC:	Contact Us	Contact Us	Contact Us	Contact Us
Sn63Pb37	1 lb., 0.050" diameter, 50 core	24-6337-8814 UPC:	Contact Us	Contact Us	Contact Us	Contact Us
Sn63Pb37	1 lb., 0.062" diameter, 50 core	24-6337-8817 UPC:	Contact Us	Contact Us	Contact Us	Contact Us
Sn63Pb37	1 lb., 0.062" diameter, 58 core	24-6337-8803 UPC:	Contact Us	Contact Us	Contact Us	Contact Us
Sn63Pb37	¼ or ½ Kg Spool, 0.25-3.00mm, Core 50, 58 or 66	Contact Us	245 UPC:	Contact Us	Contact Us	Contact Us
Sn60Pb40	¼ or ½ Kg Spool, 0.25-3.00mm, Core 50, 58 or 66	Contact Us	245 UPC:	Contact Us	Contact Us	Contact Us
Ag2Sn62Pb36	¼ or ½ Kg Spool, 0.25-3.00mm, Core 50, 58 or 66	Contact Us	245 UPC:	Contact Us	Contact Us	Contact Us