

Deluxe Molded D-sub Cable, DB25 Male / Male, 15 ft


Features for this product

- Wired straight through to connect many serial devices/peripherals
- 360 degree fully shielded for protection against EMI/RFI
- Gold plated contacts provide reliable connections with repeated mating cycles
- Molded backshells provide durability and increased strength at cable entry point
- DB25 male to male connectors; lengths range from 2.5 ft to 125 ft; color is light gray



L-com's CSMN family of D-sub cable assemblies offer solid performance at economical prices. Fully shielded throughout the entire cable to prevent against data corrupting EMI/RFI. Molded backshells provide superior strain relief while robust 26 AWG conductors are wired straight through for ease of compatibility. Metal thumbscrews insure fast and easy connections. Custom lengths and pinouts are available with modest minimum requirements.


Details for this D-Subminiature product

L-com Item #	CSMN25MM-15
Manufacturer	L-com
UPC #	822335014701
RoHS Status	RoHS Compliant 

Item #	Description
--------	-------------

Deluxe D-Sub Cable Assemblies - Fully Populated with 4-40 Thumbscrews

The CSMN Series of D-Sub cable assemblies is our middle of the line that offers excellent performance and lower pricing. All assemblies utilize 26AWG stranded conductors with foil shielding for flexibility and performance. Backshells are fully molded with copper shielding for better immunity to outside noise. Mating hardware is 4-40 thumbscrews which makes securing without tools quick and easy. Hex nuts on female connectors are removable to expose 4-40 thumbscrews. **Note:** 50 pin assemblies use 28AWG twisted pairs due to space constraints in the backshell molding. Color: Light Gray.

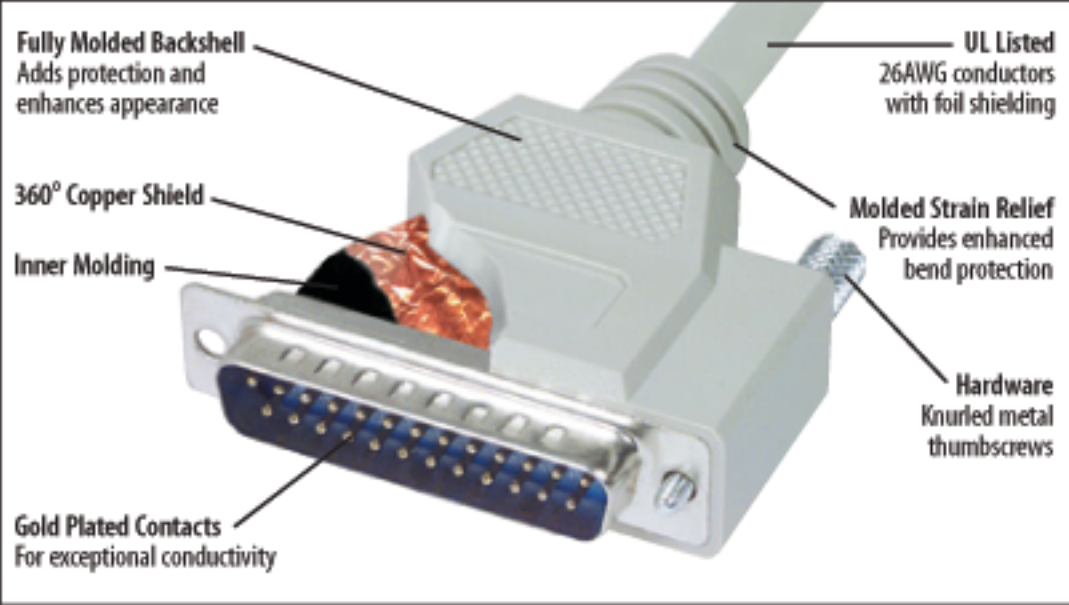

Deluxe 9 Pin D-Sub Molded Cables with Thumbscrews - Shielded and Fully Populated

CSMN9MM-2.5	Deluxe Molded Cable, DB9 Male / Male, 2.5 ft	0.00	7.00	7.00	0.00	0.00
CSMN9MM-5	Deluxe Molded Cable, DB9 Male / Male, 5.0 ft					
CSMN9MM-10	Deluxe Molded Cable, DB9 Male / Male, 10.0 ft					
CSMN9MM-15	Deluxe Molded Cable, DB9 Male / Male, 15.0 ft					
CSMN9MM-25	Deluxe Molded Cable, DB9 Male / Male, 25.0 ft					
CSMN9MM-125	Deluxe Molded Cable, DB9 Male / Male, 125.0 ft					
CSMN9MF-2.5	Deluxe Molded Cable, DB9 Male / Female, 2.5 ft					
CSMN9MF-5	Deluxe Molded Cable, DB9 Male / Female, 5.0 ft					
CSMN9MF-10	Deluxe Molded Cable, DB9 Male / Female, 10.0 ft					
CSMN9MF-15	Deluxe Molded Cable, DB9 Male / Female, 15.0 ft					
CSMN9MF-25	Deluxe Molded Cable, DB9 Male / Female, 25.0 ft	16.00	16.00	11.00		

Deluxe 15 Pin D-Sub Molded Cables with Thumbscrews - Shielded and Fully Populated

CSMN15MM-2.5	Deluxe Molded Cable, DB15 Male / Male, 2.5 ft	44.00	44.00	0.00		
CSMN15MM-5	Deluxe Molded Cable, DB15 Male / Male, 5.0 ft					
CSMN15MM-10	Deluxe Molded Cable, DB15 Male / Male, 10.0 ft					
CSMN15MM-15	Deluxe Molded Cable, DB15 Male / Male, 15.0 ft					
CSMN15MM-25	Deluxe Molded Cable, DB15 Male / Male, 25.0 ft					
CSMN15MM-50	Deluxe Molded Cable, DB15 Male / Male, 50.0 ft					
CSMN15MF-2.5	Deluxe Molded Cable, DB15 Male / Female, 2.5 ft					
CSMN15MF-5	Deluxe Molded Cable, DB15 Male / Female, 5.0 ft					
CSMN15MF-10	Deluxe Molded Cable, DB15 Male / Female, 10.0 ft					
CSMN15MF-15	Deluxe Molded Cable, DB15 Male / Female, 15.0 ft					
CSMN15MF-25	Deluxe Molded Cable, DB15 Male / Female, 25.0 ft					
CSMN15MF-50	Deluxe Molded Cable, DB15 Male / Female, 50.0 ft					

Deluxe 25 Pin D-Sub Molded Cables with Thumbscrews - Shielded and Fully Populated

CSMN25MM-2.5	Deluxe Molded Cable, DB25 Male / Male, 2.5 ft	44.00	44.00	25.00		
CSMN25MM-5	Deluxe Molded Cable, DB25 Male / Male, 5.0 ft					
CSMN25MM-10	Deluxe Molded Cable, DB25 Male / Male, 10.0 ft					
CSMN25MM-15	Deluxe Molded Cable, DB25 Male / Male, 15.0 ft					
CSMN25MM-25	Deluxe Molded Cable, DB25 Male / Male, 25.0 ft					
CSMN25MM-50	Deluxe Molded Cable, DB25 Male / Male, 50.0 ft					
CSMN25MM-125	Deluxe Molded Cable, DB25 Male / Male, 125.0 ft					
CSMN25MF-2.5	Deluxe Molded Cable, DB25 Male / Female, 2.5 ft					
CSMN25MF-5	Deluxe Molded Cable, DB25 Male / Female, 5.0 ft					
CSMN25MF-10	Deluxe Molded Cable, DB25 Male / Female, 10.0 ft					
CSMN25MF-15	Deluxe Molded Cable, DB25 Male / Female, 15.0 ft					
CSMN25MF-25	Deluxe Molded Cable, DB25 Male / Female, 25.0 ft					
CSMN25MF-50	Deluxe Molded Cable, DB25 Male / Female, 50.0 ft					

Deluxe 37 Pin D-Sub Molded Cables with Thumbscrews - Shielded and Fully Populated

CSMN37MM-2.5	Deluxe Molded Cable, DB37 Male / Male, 2.5 ft	20.00	20.00	0.00		
CSMN37MM-5	Deluxe Molded Cable, DB37 Male / Male, 5.0 ft					
CSMN37MM-10	Deluxe Molded Cable, DB37 Male / Male, 10.0 ft					
CSMN37MM-15	Deluxe Molded Cable, DB37 Male / Male, 15.0 ft					
CSMN37MM-25	Deluxe Molded Cable, DB37 Male / Male, 25.0 ft					
CSMN37MM-50	Deluxe Molded Cable, DB37 Male / Male, 50.0 ft					
CSMN37MF-2.5	Deluxe Molded Cable, DB37 Male / Female, 2.5 ft					
CSMN37MF-5	Deluxe Molded Cable, DB37 Male / Female, 5.0 ft					
CSMN37MF-10	Deluxe Molded Cable, DB37 Male / Female, 10.0 ft					
CSMN37MF-15	Deluxe Molded Cable, DB37 Male / Female, 15.0 ft					
CSMN37MF-25	Deluxe Molded Cable, DB37 Male / Female, 25.0 ft					
CSMN37MF-50	Deluxe Molded Cable, DB37 Male / Female, 50.0 ft					

Deluxe 50 Pin D-Sub Molded Cables with Thumbscrews - Shielded and Fully Populated

CSMN50MM-2.5	Deluxe Molded Cable, DB50 Male / Male, 2.5 ft	20.00	20.00	0.00		
CSMN50MM-5	Deluxe Molded Cable, DB50 Male / Male, 5.0 ft					
CSMN50MM-10	Deluxe Molded Cable, DB50 Male / Male, 10.0 ft					
CSMN50MM-15	Deluxe Molded Cable, DB50 Male / Male, 15.0 ft					
CSMN50MM-25	Deluxe Molded Cable, DB50 Male / Male, 25.0 ft					
CSMN50MM-50	Deluxe Molded Cable, DB50 Male / Male, 50.0 ft					
CSMN50MF-2.5	Deluxe Molded Cable, DB50 Male / Female, 2.5 ft					
CSMN50MF-5	Deluxe Molded Cable, DB50 Male / Female, 5.0 ft					
CSMN50MF-10	Deluxe Molded Cable, DB50 Male / Female, 10.0 ft					
CSMN50MF-15	Deluxe Molded Cable, DB50 Male / Female, 15.0 ft					
CSMN50MF-25	Deluxe Molded Cable, DB50 Male / Female, 25.0 ft					
CSMN50MF-50	Deluxe Molded Cable, DB50 Male / Female, 50.0 ft					

