

## NAVIGATE THE CATALOG BY SECTION

[1](#)
[2](#)
[3](#)
[4](#)
[5](#)
[6](#)
[7](#)
[8](#)
[9](#)
[10](#)
[11](#)
[12](#)
[13](#)
[14](#)
[15](#)
[16](#)
[17](#)
[18](#)
[19](#)




## LAPP ONLINE CATALOG

### EPIC® Pin & Sleeve Connectors


#### 20 Amp: North American Version

CEE Straight Female Panel Mount Receptacle

IP 44

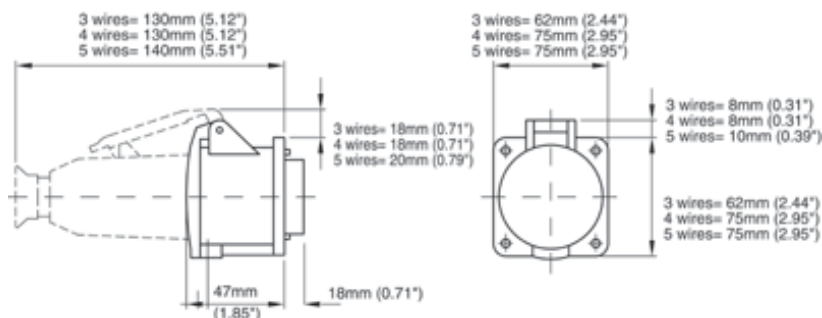

Drilling pattern

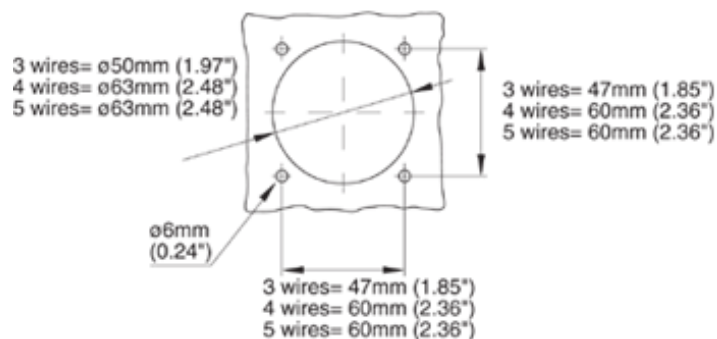

## TECHNICAL DATA

<b>Impact Resistance:</b>	8J
<b>Ambient Temperature:</b>	-25°C to 70°C
<b>Flame Resistance:</b>	
➤ <b>Glow Wire Test: Enclosure:</b>	850°C
➤ <b>Glow Wire Test: Contact Enclosure:</b>	850°C
➤ <b>Self-Extinguishing: Enclosure:</b>	UL94-V2
➤ <b>Self-Extinguishing: Contact Carrier:</b>	UL94-V2

## PART NUMBERS

Part Number	Voltage	# of Wires	# of Poles	Ground-Clock Position
431611FX	125	3	1+N+PE	4
431622FX	250	3	2+PE	6
431650FX	480	3	2+PE	7
431603FX	250 DC	3	2+PE	3
441612FX	125/250	4	2+N+PE	12
441622FX	3Ø250	4	3+PE	9
441650FX	3Ø480	4	3+PE	7
NA	3Ø600	4	3+PE	5
451622FX	3ØY 120/208	5	3+N+PE	9
451650FX	3ØY 277/480	5	3+N+PE	7
NA	3ØY 347/600	5	3+N+PE	5
451602FX	50-250 (500 Hz)	5	3+N+PE	2

## MATING COMPONENTS

- [MULTIMAX Male Plug with Cable Sleeve, IP 44](#)
- [CEE Straight Male Plug with Cable Gland, IP 44](#)
- [CEE 90° Male Plug with Cable Gland, IP 44](#)



**DOWNLOAD PDF CATALOG PAGE**