

NAVIGATE THE CATALOG BY SECTION

[1](#) [2](#) [3](#) [4](#) [5](#) [6](#) [7](#) [8](#) [9](#) [10](#) [11](#) [12](#) [13](#) [14](#) [15](#) [16](#) [17](#) [18](#) [19](#)




LAPP ONLINE CATALOG

EPIC® Pin & Sleeve Connectors

20 Amp: North American Version

CEE Straight Female Connector with Cable Gland

IP 67

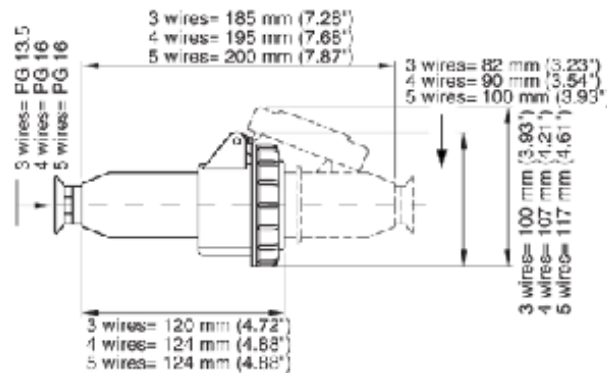

TECHNICAL DATA

Impact Resistance:	8J
Ambient Temperature:	-25°C to 70°C
Flame Resistance:	
➤ Glow Wire Test: Enclosure:	850°C
➤ Glow Wire Test: Contact Enclosure:	850°C
➤ Self-Extinguishing: Enclosure:	UL94-V2
➤ Self-Extinguishing: Contact Carrier:	UL94-V2

PART NUMBERS

Part Number	Voltage	# of Wires	# of Poles	Ground-Clock Position
473203FX	125	3	1+N+PE	4
473303FX	250	3	2+PE	6
473503FX	480	3	2+PE	7
473673FX	250 DC	3	2+PE	3
473833FX	125/250	4	2+N+PE	12
473313FX	3Ø250	4	3+PE	9
473513FX	3Ø480	4	3+PE	7
NA	3Ø600	4	3+PE	5
473323FX	3ØY 120/208	5	3+N+PE	9
473523FX	3ØY 277/480	5	3+N+PE	7
NA	3ØY 347/600	5	3+N+PE	5
473723FX	50-250 (500 Hz)	5	3+N+PE	2

MATING COMPONENTS

- [CEE Straight Male Plug with Cable Gland, IP 67](#)
- [CEE 90° Male Plug with Cable Gland, IP 67](#)
- [CEE Angled 82° Male Inlet, IP 67](#)



DOWNLOAD PDF CATALOG PAGE

LAPP USA • LAPP CANADA • LAPP MEXICO
Headquarters: 29 Hanover Road, Florham Park, NJ 07932
800-774-3539 • FAX: 973-660-9330 • sales@lappusa.com