

NAVIGATE THE CATALOG BY SECTION

-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-

LAPP ONLINE CATALOG

EPIC® Pin & Sleeve Connectors



30 Amp: North American Version

CEE Angled 82° Male Inlet

IP 44



3 wires= 95mm (3.74")
 4 wires= 95mm (3.74")
 5 wires= 105mm (4.13")

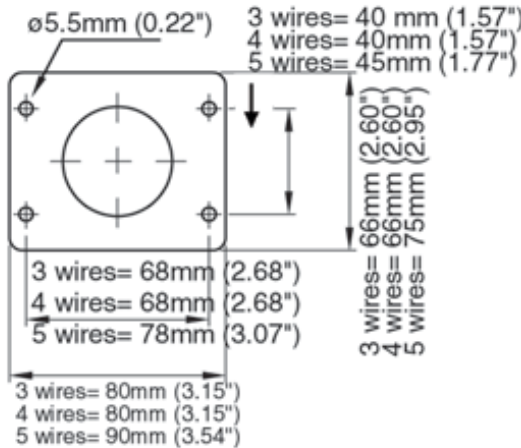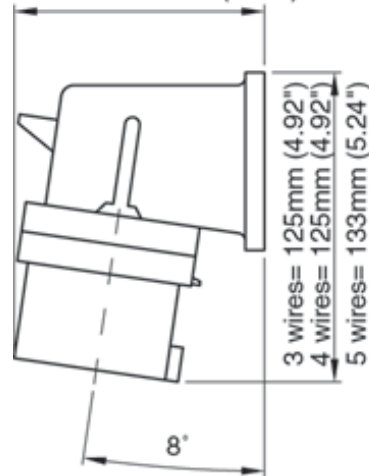

TECHNICAL DATA

Impact Resistance: 8J

Ambient Temperature: -25°C to 70°C

Flame Resistance:

➤ Glow Wire Test: Enclosure: 850°C

- ▶ **Glow Wire Test: Contact Enclosure:** 850°C
- ▶ **Self-Extinguishing: Enclosure:** UL94-V2
- ▶ **Self-Extinguishing: Contact Carrier:** UL94-V2

PART NUMBERS

Part Number	Voltage	# of Wires	# of Poles	Ground-Clock Position
476205FX	125	3	1+N+PE	4
476305FX	250	3	2+PE	6
NA	480	3	2+PE	7
NA	250 DC	3	2+PE	3
476835FX	125/250	4	2+N+PE	12
476315FX	3Ø250	4	3+PE	9
476515FX	3Ø480	4	3+PE	7
NA	3Ø600	4	3+PE	5
476325FX	3ØY 120/208	5	3+N+PE	9
476525FX	3ØY 277/480	5	3+N+PE	7
NA	3ØY 347/600	5	3+N+PE	5
476725FX	50-250 (500 Hz)	5	3+N+PE	2

MATING COMPONENTS

- ▶ [MULTIMAX Female Connector with Cable Sleeve, IP](#)

[44](#)



DOWNLOAD PDF CATALOG PAGE

LAPP USA • LAPP CANADA • LAPP MEXICO
 Headquarters: 29 Hanover Road, Florham Park, NJ 07932
 800-774-3539 • FAX: 973-660-9330 • sales@lappusa.com